

OMRON

AC Servomotors/ Servo Drives

G Series

A Wide Variation of Models with the Functions and Performance
Demanded in Servo Systems



G Series

- » Easy adjustment
- » Quickly suppress vibration
- » Built-in MECHATROLINK communications interface

realizing

Complete Reinforcement of Functions and Performance Demanded in Servo Systems




NEW OMNUC G Series

Let the G Series solve your equipment problems.

Increase Productivity!

The many variations provided by G-series Servo Systems features high-precision positioning with improved response and vibration control, making it suitable for a variety of applications.

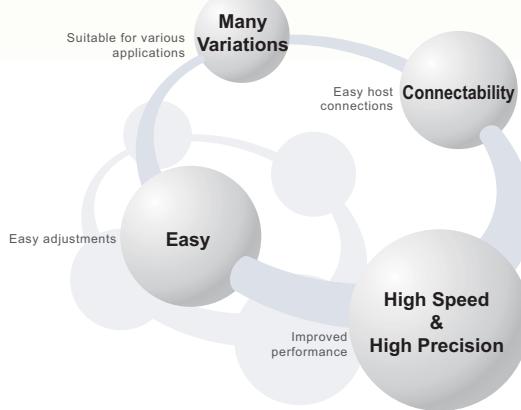


Integrated Development Environment Cut Your TCO from Design to Maintenance.

NEW

MECHATROLINK-II-compatible AC Servomotors/Servo Drives

One Cable Enables Setting and Monitoring Parameters

Connect the PLC and Servo Drive with a single cable to reduce wiring. What's more, the parameters for many Servo Drives can be set and monitored at the same time between a personal computer and the Controller.


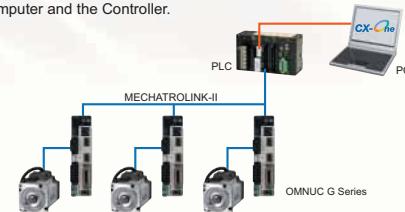


Note: MECHATROLINK-II is a registered trademark of the MECHATROLINK Members Association.

CX-One

Easily Program Positioning and Communications

With the CX-One FA Integrated Tool Package, parameters settings, program design, debugging, operation monitoring, alarms, error monitoring, and maintenance of the Servo System can be handled with ease.

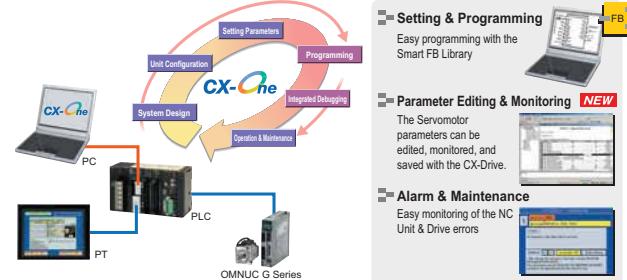

INDEX

Features	2
Selection Guide	6
OMNUC G-series Servomotors and Servo Drives with General-purpose Inputs	
System Configuration	8
Model Number Legend	12
Ordering Information	14
Servomotor/Servo Driver Combinations	26
Cable Combinations	28
AC Servo Driver Specifications	37
AC Servomotor Specifications	40
Encoder Specifications, External Regeneration Resistors, Reactor Specifications and Parameter Unit Specifications	56
Connections	58
I/O Circuit Diagrams	61
Components and Functions	68
Dimensions	72

OMRON, for Easy Setup, Easy Operation, Easy Connections, and Easy Monitoring

Wider Range of Compact Servomotors and Compatibility, Plus Fast Positioning with

Servo Drives with Increased Machine Improved Response and Vibration Control




G Series

Easy!

Easy Adjustment

Realtime autotuning sets the optimum gain.

An autotuning function calculates the device load in realtime and automatically sets the optimal gain, simplifying the adjustment procedure.

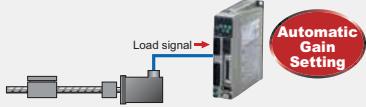

Select the Optimum Motor

A wide range of Servomotors is available to meet application needs.


You can select a suitable Servomotor from a wide range of Servomotor capacities to cater to various applications.



Reduce Control Panel Installation Space

Even Smaller Servo Drives.

The footprint of the Servo Drives has been reduced by 32% compared to previous OMRON models (see note), helping to reduce control panel size.

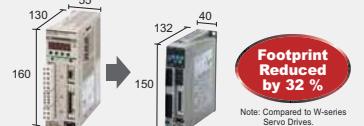

Advanced Performance!

Reduce Tact Time

Significantly better speed response frequency.


The speed response frequency has been improved by a factor of 2.5 compared to previous OMRON models. (See note.) The stabilization time has been reduced, increasing machine speed and response performance.



Reduce Tact Time

Fast positioning with improved command pulse frequency performance.

The command pulse frequency is 4 times faster than previous OMRON models. (See note.) This enables fast, accurate control.

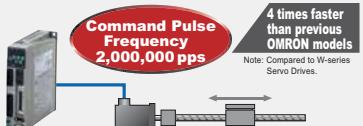

Improve Processing Accuracy

All Servomotors contain a 17-bit encoder¹ for greater accuracy.

Positioning is twice as accurate as previous OMRON models² for submicron accuracy. This enables stable control in the low speed range.




Advanced Functionality!

Reduce Mechanical Vibration

Quick suppression of vibration with an adaptive filter.


Even if the resonant frequency changes, realtime evaluation automatically follows the changes to reduce the effect of vibration due to low mechanical rigidity, such as for conveyor belts.

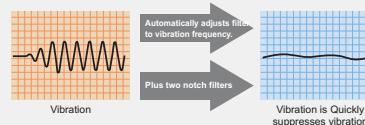

Reduce Tact Time

Reduce mechanical vibration with the vibration control function.

By removing the vibration frequency components between the stop position and the intermediate position, vibration that occurs due to low mechanical rigidity can be suppressed. (Control for two vibration frequencies)

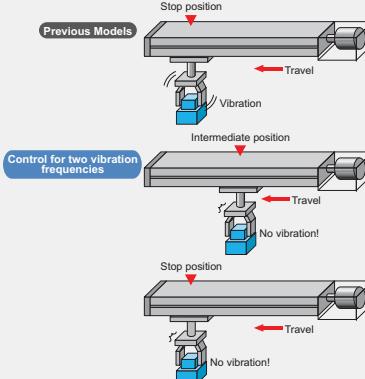


Flexible Application

Change the command control mode as required by the application.


Select from position control, speed control, and torque control for use in applications such as the pressing, tension, and injection.

Application Examples

• Attaching Parts, Pressing, and Tightening Screws

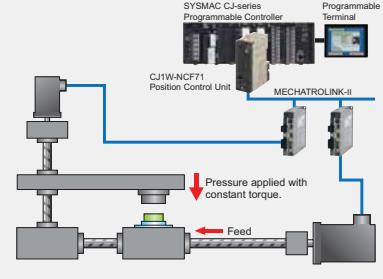

• Rollers and Conveyors

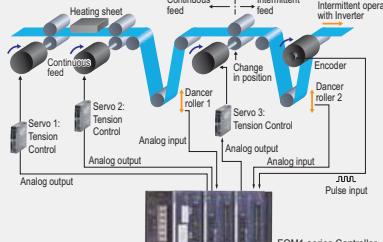

The optimum combination can be found from to handle various applications.

a variety of functions and model variations

OMNUC G Series

Servo Drive Variations

		OMNUC G Series				SMARTSTEP2 Series			
		Servo Drives with General-purpose Inputs		MECHATROLINK-II [*] Compatible Servo Drives		Pulse train input			
		R88D-GT		R88D-GN□-ML2		R7D-BP			
Power supply	AC100V		Single-phase		Single-phase		Single-phase		
	AC200V	Single-phase	Single/ Three-phase	Three-phase	Single-phase	Single/ Three-phase	Three-phase	Single-phase	Single/ Three-phase
Motor capacity	AC100V	50W 50W 100W 200W 400W	100W 100W 200W 200W 400W	200W 200W 400W	50W 50W 100W 200W 400W	100W 100W 200W 200W 400W	200W 200W 400W	50W 50W 100W 200W	100W 100W 200W
	Single-phase	50W 50W 100W 200W 400W	100W 100W 200W 200W 400W	200W 200W 400W	50W 50W 100W 200W 400W	100W 100W 200W 200W 400W	200W 200W 400W	50W 50W 100W 200W	100W 100W 200W
	AC200V	750W 750W 900W 1kW 1.5kW	900W 900W 1kW 1.5kW	1kW 1kW 1.5kW	750W 750W 900W 1kW 1.5kW	900W 900W 1kW 1.5kW	1kW 1.5kW	50W 50W 100W 200W	100W 100W 200W
Interface	Command type	Pulse train	Analog		ML2		Pulse train		
	Control modes	Position control	Speed control	Torque control	Position control	Speed control	Torque control	Position control	
Control modes	Control mode switching	Mode switching			Mode switching			—	
	Vibration control	Vibration control ^{*1}			Vibration control ^{*1}		Vibration control		
Tuning functions	Autotuning	AUTO			AUTO		AUTO		
	Realtime autotuning	FIT GAIN Adaptive filter ^{*2}			Adaptive filter ^{*2}		Adaptive filter ^{*3}		
Servo Drive functions	Torque limits	Torque limit ^{*1}			Torque limit ^{*1}		Torque limit ^{*1}		
	Encoder output	ABS INC			ABS INC		INC		
	Internal set speeds	8 speeds			—		4 speeds		

*1. Two limits. *2. One adaptive filter and two notch filters. *3. One adaptive filter and one notch filter.

Functions

Pulse train	Pulse train: The speed and travel distance are input to the	Analog:	Analog: The speed and torque are input to the Servo as analog signals.	ML2	ML2: MECHATROLINK-II high-speed Servo communications motion	Position control	Position control: Control is applied to move to the target position and then stop at the target position.	Speed control	Speed control: Control is applied to change the linear speed or target speed. For example, speed control is used for applications such as turning windmills, controlling welding speeds, and controlling feeding speeds.
Torque control	Torque control: Control is applied to adjust the rotational force. Torque control is suitable for applications such as parts insertion, pressing, and screw tightening.	Mode switching	Command control mode switching: Switching is possible between any two of the three control modes: position control, speed control, and torque control.	Vibration control	Vibration control function: Vibration is suppressed by automatically setting a filter for the vibration frequency.	AUTO	Autotuning: The motor is moved according to a command pattern automatically generated by the Servo Drive, then estimates the load inertia from the torque required at that time to automatically set the optimum		
FIT GAIN	FIT gain: The rigidity for the realtime autotuning for position control is set automatically. By repeatedly inputting a specific operation pattern, the optimum rigidity is set automatically.	ABS	Absolute output: When the Controller power supply is turned ON, the Controller reads the Servo absolute position data to restore the absolute position.	INC	Incremental output: When the Controller power supply is turned ON, the Controller reads the Servo absolute position data to restore the absolute position.	Adaptive filter	Adaptive filter: The machine load inertia is calculated in real-time and the result is used to automatically set the optimum gain.	Torque limit	Torque limit: Switching is possible between the first torque limit and the second torque limit to limit the Servomotor output torque.

*4. The rated speed is 1,500 r/min for 7.5 kW Servomotors only

Servomotor Variations

		OMNUC G Series				SMARTSTEP2 Series	
		Servomotors with General-purpose Inputs and MECHATROLINK-II [*] Compatible Servomotors				Pulse train input	
		R88M-G				R88M-G	
Servomotor capacity	Motor type	Cylinder type		Cylinder type		Flat type	
	Rated speed	1000r/min		2000r/min		3000r/min	
Servomotor capacity	50W	INC ABS		INC		INC	
	100W	INC ABS		INC		INC ABS	
	200W	INC ABS		INC		INC ABS	
	400W	INC ABS		INC		INC ABS	
	750W	INC ABS		INC		INC	
	900W	INC ABS		INC		INC	
	1kW	INC ABS		INC		INC ABS	
	1.5kW	INC ABS		INC		INC ABS	
	2kW	INC ABS		INC		INC ABS	
	3kW	INC ABS		INC		INC ABS	
	4kW	INC ABS		INC		INC ABS	
	4.5kW	INC ABS		INC		INC ABS	
	5kW	INC ABS		INC		INC ABS	
	6kW	INC ABS		INC		INC ABS	
	7.5kW	INC ABS		INC		INC ABS	

INC	ABS	Incremental/absolute output: The Servomotor can be switched between an incremental output and an absolute output. When an absolute output is selected and the Controller power supply is turned ON, operation is always started from the origin point.	INC	Incremental output: When the Controller power supply is turned ON, operation is always started from the origin point.
		*4. The rated speed is 1,500 r/min for 7.5 kW Servomotors only		*MECHATROLINK-II is a registered trademark of the MECHATROLINK Members Association

For detailed specifications of the SMARTSTEP 2 Series, refer to the SMARTSTEP 2 Catalog (Cat. No. I813).

Functions

INC	ABS	Incremental/absolute output: The Servomotor can be switched between an incremental output and an absolute output. When an absolute output is selected and the Controller power supply is turned ON, operation is always started from the origin point.	INC	Incremental output: When the Controller power supply is turned ON, operation is always started from the origin point.
		*4. The rated speed is 1,500 r/min for 7.5 kW Servomotors only		*MECHATROLINK-II is a registered trademark of the MECHATROLINK Members Association

OMNUC G-series AC Servomotors/Servo Drives

R88M-G/R88D-GT

Support for a Wide Range of Applications with Position Control, Speed Control, Torque Control.

- High-speed Response

The G-series AC Servomotors and Servo Drives have achieved high-speed response capabilities exceeding OMRON's W-series models, with a high-response frequency of 1 kHz (compared to 400 Hz for the W Series).

- Suppressing Vibration of Low-rigidity Mechanisms during Acceleration/Deceleration

The damping control function suppresses vibration of low-rigidity mechanisms or devices whose ends tend to vibrate. Two damping filters are provided to enable switching the vibration frequency automatically according to the direction


of rotation and also via an external signal. In addition, the settings can be made easily merely by setting the vibration frequency and filter values, and you are assured of stable operation even if the settings are inappropriate.

- High-speed Positioning via Resonance Suppression Control


The realtime autotuning function automatically estimates the load inertia of the machine in realtime and sets the optimal gain. The adaptive filter automatically suppresses vibration caused by resonance. Also, two independent notch filters make it possible to reduce vibration of a mechanism with multiple resonance frequencies.

System Configuration

Note: CX-Drive (version 1.61) support for OMNUC G-series Servo Drives can be obtained by using the CX-One V2 auto-update function from May 30, 2008.

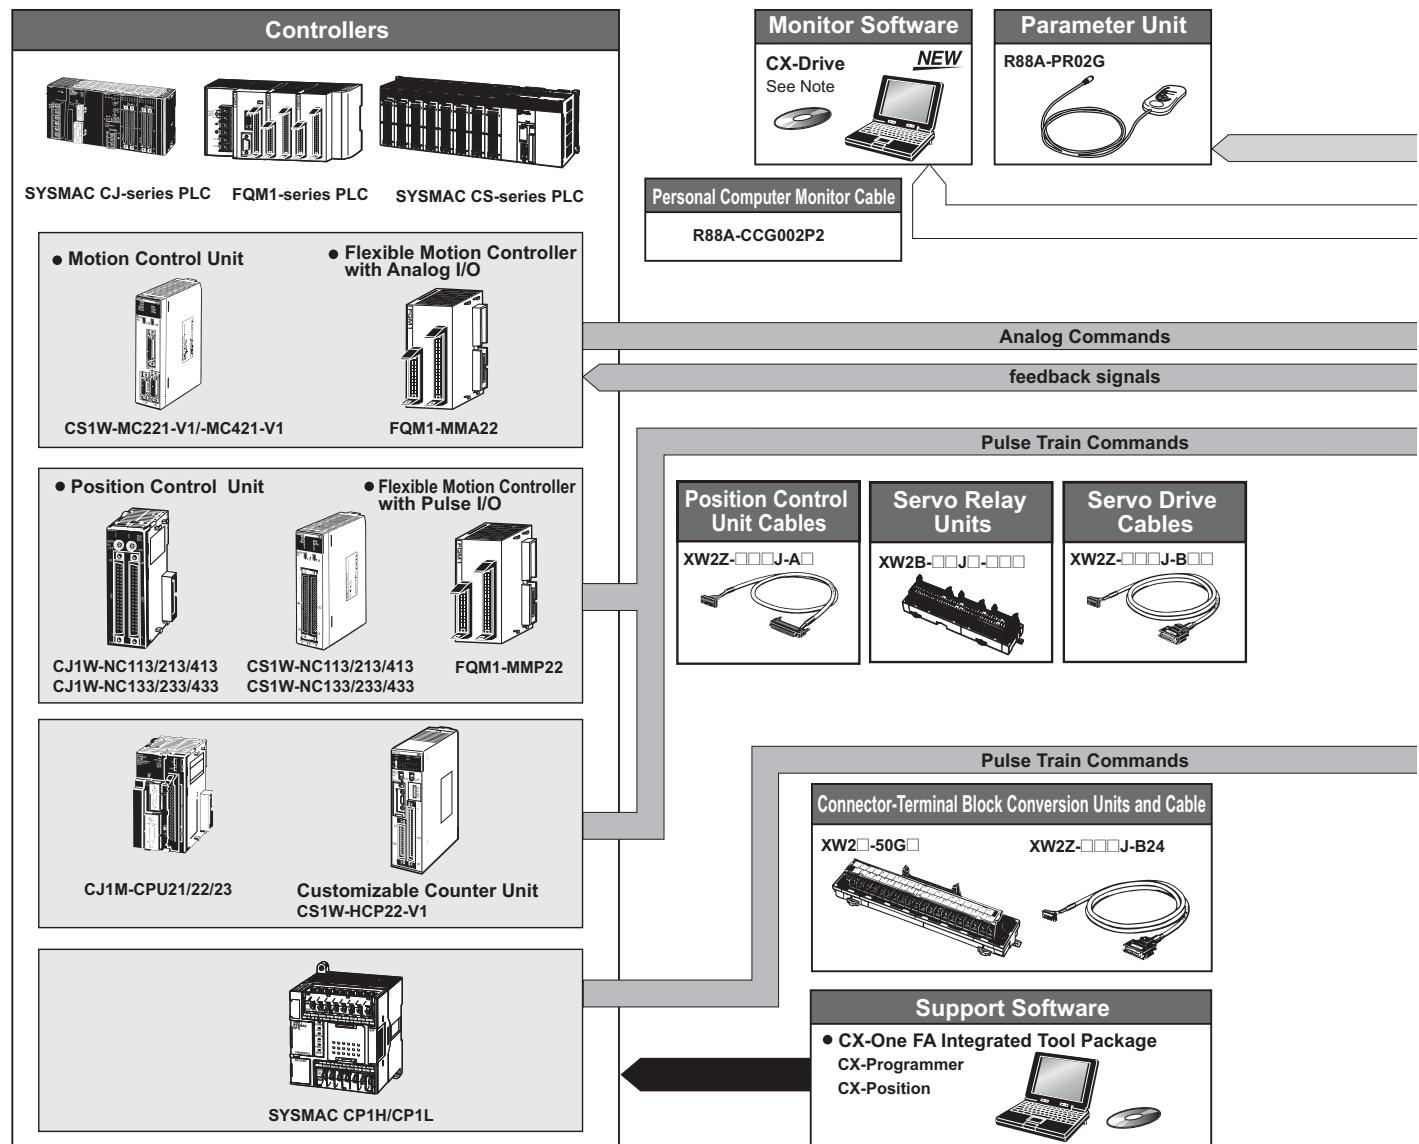

- Command Control Mode Switching
Operation can be performed by switching between two of the following control modes: Position control, speed control (including internal speed) and torque control. Therefore, a variety of applications can be supported by one Servo Drive.
- Simplified Speed Control with Internal Speed Settings
Eight internal speed settings allow you to change the speed easily by using external signals.

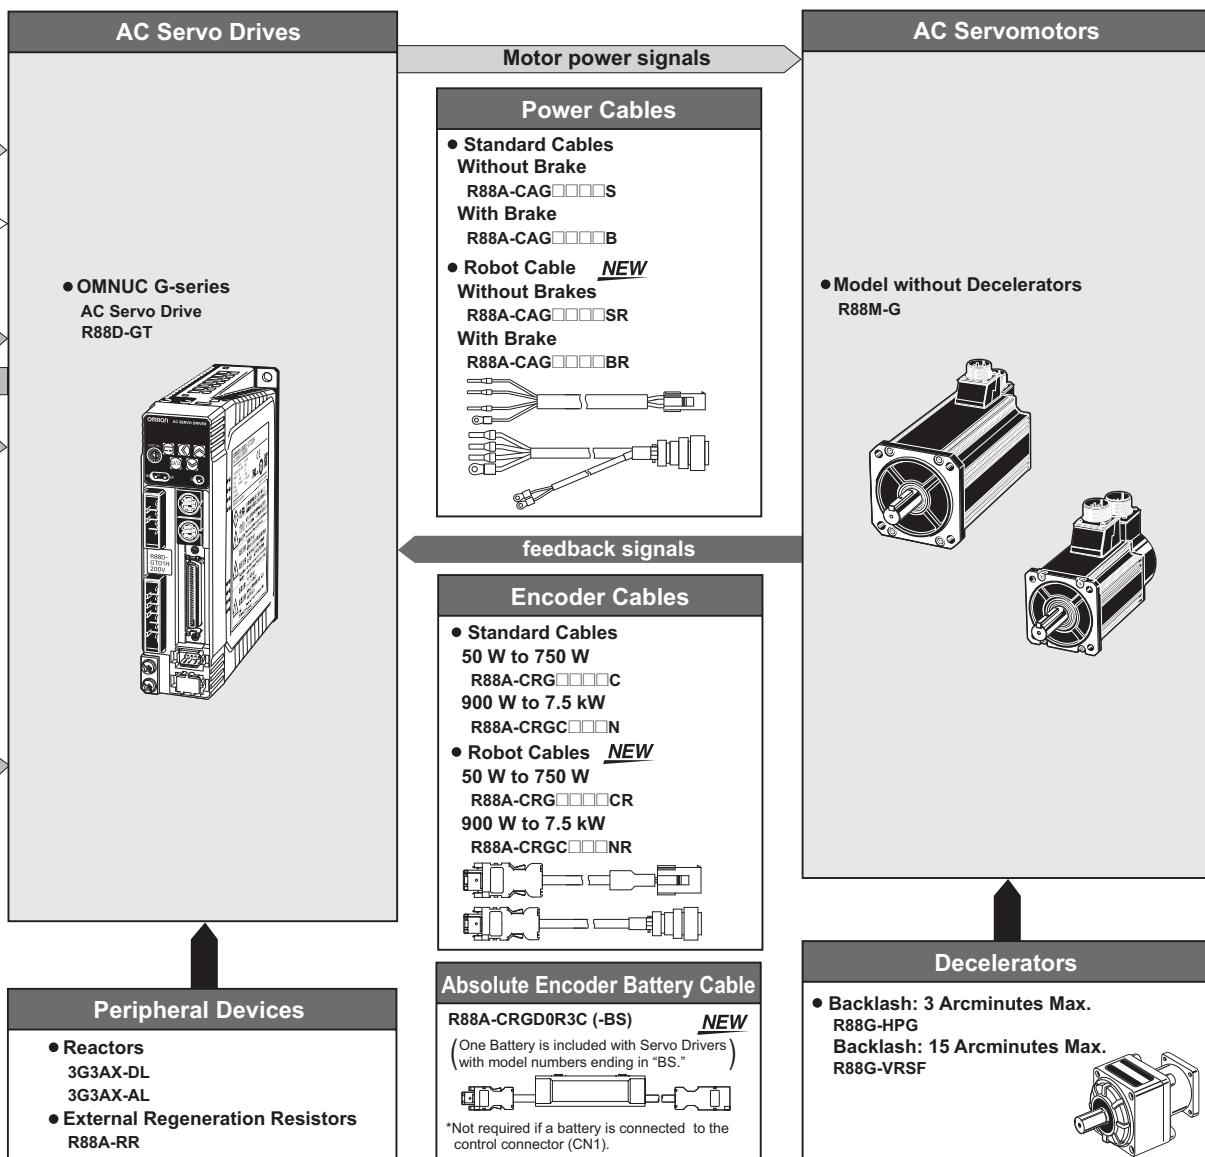

OMNUC G-series AC Servomotors/Servo Drives with General-purpose Pulse-string or Analog Inputs

R88M-G/R88D-G□-ML2


Saves Space and Enables MECHATROLINK-II Communications with the Controller.

- Data transfer using MECHATROLINK-II (See Note 1) Communications:
All control data that can be interfaced between the Servo Driver and the Controller is transmitted using data communications. This enables maximizing the Servomotor performance without restricting the transmission performance of the control signals.
- Having a communications module built into the Servo Driver significantly saves space in the control panel.







Note: 1. MECHATROLINK-II is a registered trademark of the MECHATROLINK Members Association.

Note: 2. CX-Drive (version 1.62) support for OMNUC G-series Servo Drivers with MECHATROLINK-II Communications can be obtained by using the CX-One V2/V3 auto-update function from July 31, 2008.

System Configuration

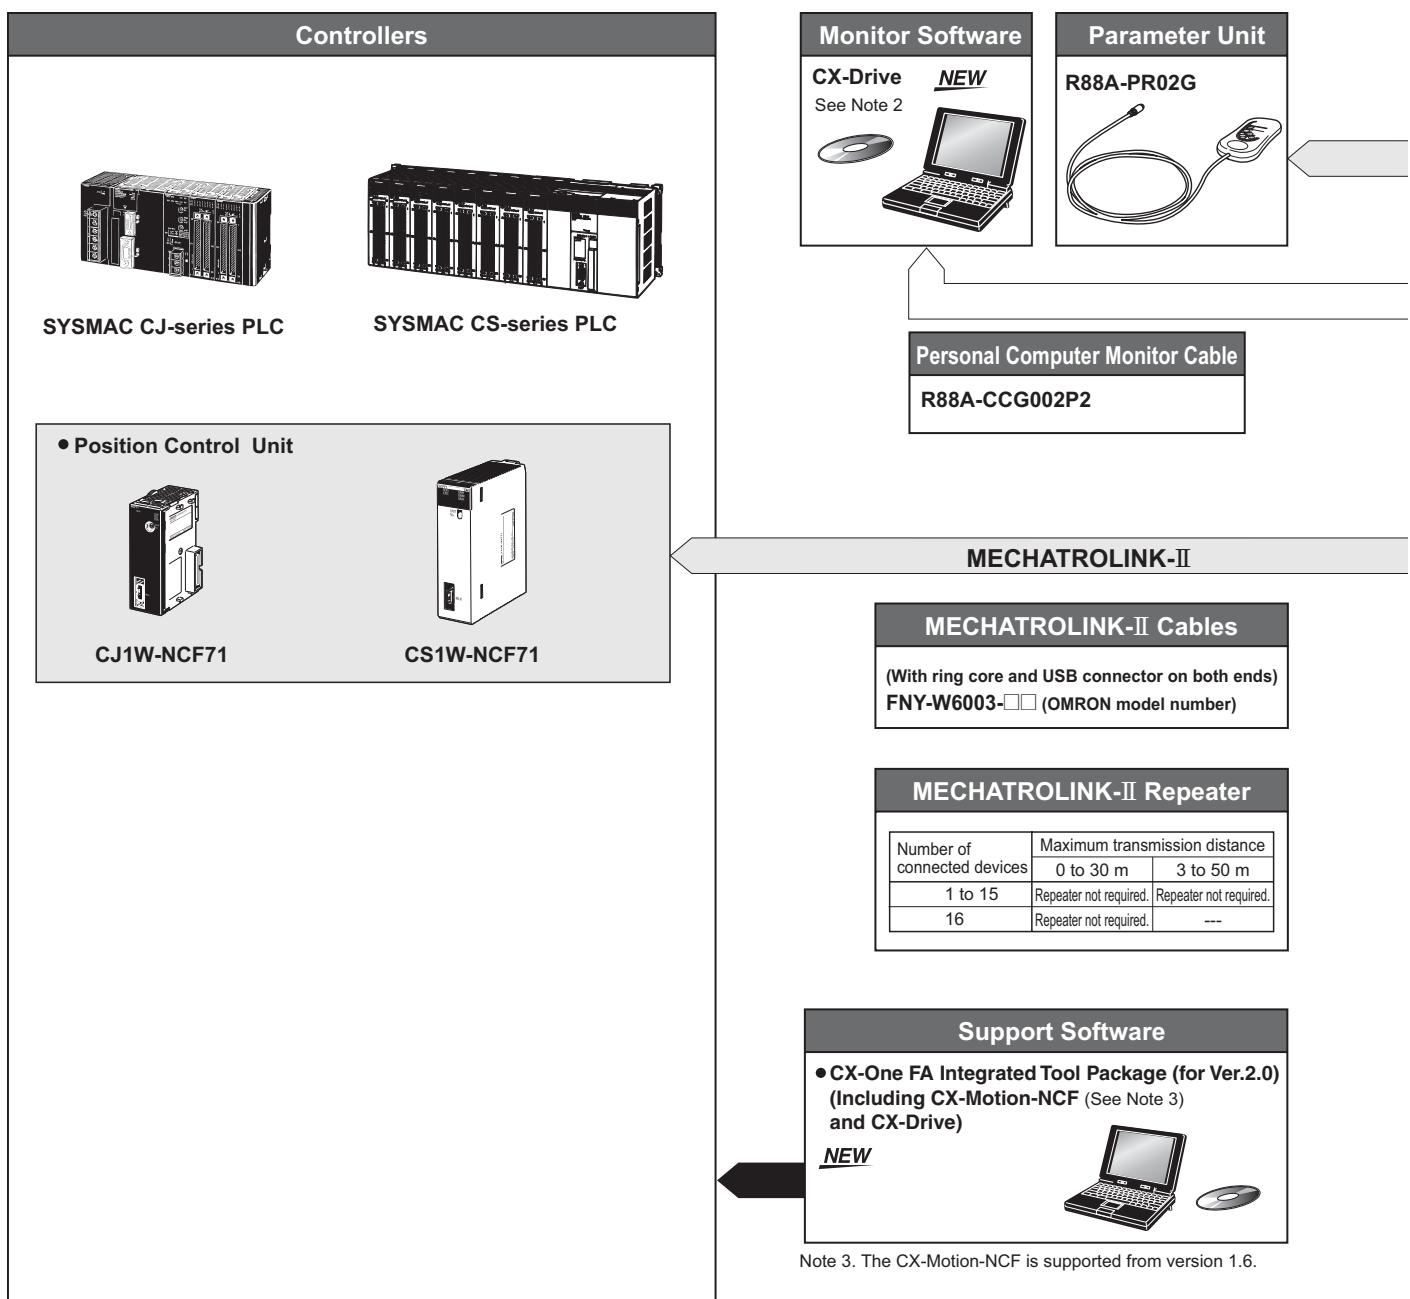

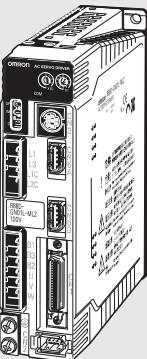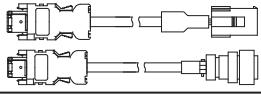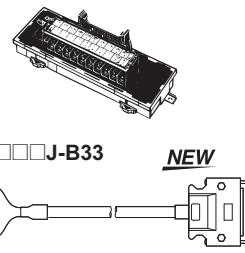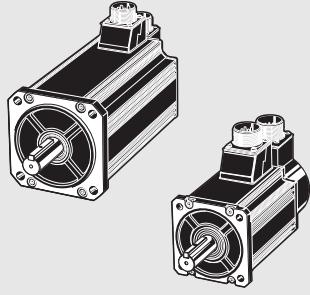

<p>AC Servo Drives</p> <ul style="list-style-type: none"> ● OMNUC G-series AC Servo Drive R88D-GN□□-ML2  <p>Peripheral Devices</p> <ul style="list-style-type: none"> ● Reactors 3G3AX-DL 3G3AX-AL ● External Regeneration Resistors R88A-RR 	<p>I/O signals</p> <p>Power Cables</p> <ul style="list-style-type: none"> ● Standard Cables Without Brake R88A-CAG□□□□S With Brake R88A-CAG□□□□B ● Robot Cable NEW Without Brakes R88A-CAG□□□□SR With Brake R88A-CAG□□□□BR  <p>Motor power signals</p> <p>feedback signals</p> <p>Encoder Cables</p> <ul style="list-style-type: none"> ● Standard Cables 50 W to 750 W R88A-CRG□□□□C 900 W to 7.5 kW R88A-CRG□□□□N ● Robot Cables NEW 50 W to 750 W R88A-CRG□□□□CR 900 W to 7.5 kW R88A-CRG□□□□NR  <p>Absolute Encoder Battery Cable R88A-CRGD0R3C (-BS) NEW (One Battery is included with Servo Drivers (with model numbers ending in "BS."))</p>  <p>*Not required if a battery is connected to the control connector (CN1).</p>	<p>Connector-Terminal Block Conversion Units and Cable</p> <ul style="list-style-type: none"> ● Connector-Terminal Block Conversion Unit XW2□-20G□ ● Cable XW2Z-□□□J-B33 NEW  <p>AC Servomotors</p> <ul style="list-style-type: none"> ● Model without Decelerators R88M-G  <p>Decelerators</p> <ul style="list-style-type: none"> ● Backlash: 3 Arcminutes Max. R88G-HPG ● Backlash: 15 Arcminutes Max. R88G-VRSF 
--	--	---

Interpreting Model Numbers

● Servo Drive Model Numbers

The model number provides information such as the Servo Drive type, the applicable Servomotor capacity, and the power supply voltage.

R88D-GN01H-ML2

OMNUC G-series
Servo Drive

Drive Type
T: Three-mode type
N: Network type

Applicable Servomotor Capacity

A5: 50 W
01: 100 W
02: 200 W
04: 400 W
08: 750 W
10: 1 kW
15: 1.5 kW
20: 2 kW
30: 3 kW
50: 5 kW
75: 7.5 kW

Power Supply Voltage
L: 100 VAC
H: 200 VAC

Network type

Blank: For Three-mode type
ML2: MECHATROLINK-II Communications

● Servomotor Model Numbers

R88M-GP10030H-BOS2

G-series
Servomotor

Motor Type
Blank: Cylinder type
P: Flat type

Servomotor Capacity

050: 50 W
100: 100 W
200: 200 W
400: 400 W
750: 750 W
900: 900 W
1K0: 1 kW
1K5: 1.5 kW
2K0: 2 kW
3K0: 3 kW
4K0: 4 kW
4K5: 4.5 kW
5K0: 5 kW
6K0: 6 kW
7K5: 7.5 kW

Rated Rotation Speed
10: 1,000 r/min
15: 1,500 r/min
20: 2,000 r/min
30: 3,000 r/min

Applied Voltage

H: 200 VAC with incremental encoder specifications
L: 100 VAC with incremental encoder specifications
T: 200 VAC with absolute encoder specifications
S: 100 VAC with absolute encoder specifications

Option

Blank: Straight shaft
B: With brake
O: With oil seal
S2: With key and tap

● Understanding Decelerator Model Numbers

Backlash = 3' Max.

R88G-HPG14A05100PBJ

Decelerator for
G-Series Servomotors
Backlash = 3' Max.

Flange Size Number

11A :□40
14A :□60
20A :□90
32A :□120
50A :□170
65A :□230

Gear Ratio

05 :1/5
09 :1/9 (only frame number 11A)
11 :1/11 (except frame number 65A)
12 :1/12 (only frame number 65A)
20 :1/20 (only frame number 65A)
21 :1/21 (except frame number 65A)
25 :1/25 (only frame number 65A)
33 :1/33
45 :1/45

Applicable Servomotor Capacity

050 : 50 W
100 :100 W
200 :200 W
400 :400 W
750 :750 W
900 :900 W
1K0 :1 kW
1K5 :1.5 kW
2K0 :2 kW
3K0 :3 kW
4K0 :4 kW
4K5 :4.5 kW
5K0 :5 kW
6K0 :6 kW
7K5 :7.5 kW

Motor Type

Blank :3,000-r/min cylindrical servomotors
P :flat servomotors
S :2,000-r/min servomotors
T :1,000-r/min servomotors

Backlash

B :3' max.

Option

Blank :Straight shaft
J :With key and tap

Backlash = 15' Max.

R88G-VRSF09B100PCJ

Decelerator for
G-Series Servomotors
Backlash = 15' Max.

Gear Ratio

05 :1/5
09 :1/9
15 :1/15
25 :1/25

Flange Size Number

B :□52
C :□78
D :□98

Applicable Servomotor Capacity

050 : 50 W
100 :100 W
200 :200 W
400 :400 W
750 :750 W

Motor Type

Blank :3,000-r/min cylindrical servomotors
P :flat servomotors

Backlash

C :15' max.

Option

J :With key and tap

Ordering Information

● Servo Drives

Specifications	Model	
	Three-mode Type	Netowork Type
Single-phase 100 VAC	50 W	R88D-GTA5L
	100 W	R88D-GT01L
	200 W	R88D-GT02L
	400 W	R88D-GT04L
Single-phase 200 VAC	50 W	R88D-GT01H
	100 W	
	200 W	R88D-GT02H
	400 W	R88D-GT04H
Single-phase/three-phase 200 VAC	750 W	R88D-GT08H
	1 kW	R88D-GT10H
	900 W	R88D-GT15H
	1 kW	
	1.5 kW	
Three-phase 200 VAC	2 kW	R88D-GT20H
	2 kW	R88D-GT30H
	3 kW	
	3 kW	R88D-GT50H
	4 kW	
	4.5 kW	
	5 kW	
	6 kW	R88D-GT75H
	7.5 kW	

● Servomotors

INC 3,000-r/min Cylindrical Servomotors

Specifications		Model	
		Straight Shaft	Straight Shaft with Key and Tap
Without brake	100 V	50 W	R88M-G05030H
		100 W	R88M-G10030L
		200 W	R88M-G20030L
		400 W	R88M-G40030L
	200 V	50 W	R88M-G05030H
		100 W	R88M-G10030H
		200 W	R88M-G20030H
		400 W	R88M-G40030H
		750 W	R88M-G75030H
		1 kW	-
		1.5 kW	-
		2 kW	-
		3 kW	-
		4 kW	-
		5 kW	-
With brake	100 V	50 W	R88M-G05030H-B
		100 W	R88M-G10030L-B
		200 W	R88M-G20030L-B
		400 W	R88M-G40030L-B
	200 V	50 W	R88M-G05030H-B
		100 W	R88M-G10030H-B
		200 W	R88M-G20030H-B
		400 W	R88M-G40030H-B
		750 W	R88M-G75030H-B
		1 kW	-
		1.5 kW	-
		2 kW	-
		3 kW	-
		4 kW	-
		5 kW	-

Note: Models with oil seals are also available, except for those marked with #.

ABS/INC 3,000-r/min Cylindrical Servomotors

Specifications			Model	
			Straight shaft	Straight shaft with key and tap
Without brake	100 V	50 W	R88M-G05030T	R88M-G05030T-S2
		100 W	R88M-G10030S	R88M-G10030S-S2
		200 W	R88M-G20030S	R88M-G20030S-S2
	200 V	400 W	R88M-G40030S	R88M-G40030S-S2
		50 W	R88M-G05030T	R88M-G05030T-S2
		100 W	R88M-G10030T	R88M-G10030T-S2
		200 W	R88M-G20030T	R88M-G20030T-S2
		400 W	R88M-G40030T	R88M-G40030T-S2
		750 W	R88M-G75030T	R88M-G75030T-S2
		1 kW	R88M-G1K030T	R88M-G1K030T-S2
With brake	100 V	1.5 kW	R88M-G1K530T	R88M-G1K530T-S2
		2 kW	R88M-G2K030T	R88M-G2K030T-S2
		3 kW	R88M-G3K030T	R88M-G3K030T-S2
		4 kW	R88M-G4K030T	R88M-G4K030T-S2
	200 V	5 kW	R88M-G5K030T	R88M-G5K030T-S2
		50 W	R88M-G05030T-B	R88M-G05030T-BS2
		100 W	R88M-G10030S-B	R88M-G10030S-BS2
		200 W	R88M-G20030S-B	R88M-G20030S-BS2
		400 W	R88M-G40030S-B	R88M-G40030S-BS2
		50 W	R88M-G05030T-B	R88M-G05030T-BS2
With brake	200 V	100 W	R88M-G10030T-B	R88M-G10030T-BS2
		200 W	R88M-G20030T-B	R88M-G20030T-BS2
		400 W	R88M-G40030T-B	R88M-G40030T-BS2
		750 W	R88M-G75030T-B	R88M-G75030T-BS2
		1 kW	R88M-G1K030T-B	R88M-G1K030T-BS2
		1.5 kW	R88M-G1K530T-B	R88M-G1K530T-BS2
		2 kW	R88M-G2K030T-B	R88M-G2K030T-BS2
		3 kW	R88M-G3K030T-B	R88M-G3K030T-BS2
		4 kW	R88M-G4K030T-B	R88M-G4K030T-BS2
		5 kW	R88M-G5K030T-B	R88M-G5K030T-BS2

Note: Models with oil seals are also available.

INC 3,000-r/min Flat Servomotors

Specifications			Model	
			Straight shaft	Straight shaft with key and tap
Without brake	100 V	100 W	R88M-GP10030L	R88M-GP10030L-S2
		200 W	R88M-GP20030L	R88M-GP20030L-S2
		400 W	R88M-GP40030L	R88M-GP40030L-S2
	200 V	100 W	R88M-GP10030H	R88M-GP10030H-S2
		200 W	R88M-GP20030H	R88M-GP20030H-S2
		400 W	R88M-GP40030H	R88M-GP40030H-S2
With brake	100 V	100 W	R88M-GP10030L-B	R88M-GP10030L-BS2
		200 W	R88M-GP20030L-B	R88M-GP20030L-BS2
		400 W	R88M-GP40030L-B	R88M-GP40030L-BS2
	200 V	100 W	R88M-GP10030H-B	R88M-GP10030H-BS2
		200 W	R88M-GP20030H-B	R88M-GP20030H-BS2
		400 W	R88M-GP40030H-B	R88M-GP40030H-BS2

Note: Models with oil seals are also available.

ABS/INC 3,000-r/min Flat Servomotors

Specifications			Model	
			Straight shaft	Straight shaft with key and tap
Without brake	100 V	100 W	R88M-GP10030S	R88M-GP10030S-S2
		200 W	R88M-GP20030S	R88M-GP20030S-S2
		400 W	R88M-GP40030S	R88M-GP40030S-S2
	200 V	100 W	R88M-GP10030T	R88M-GP10030T-S2
		200 W	R88M-GP20030T	R88M-GP20030T-S2
		400 W	R88M-GP40030T	R88M-GP40030T-S2
With brake	100 V	100 W	R88M-GP10030S-B	R88M-GP10030S-BS2
		200 W	R88M-GP20030S-B	R88M-GP20030S-BS2
		400 W	R88M-GP40030S-B	R88M-GP40030S-BS2
	200 V	100 W	R88M-GP10030T-B	R88M-GP10030T-BS2
		200 W	R88M-GP20030T-B	R88M-GP20030T-BS2
		400 W	R88M-GP40030T-B	R88M-GP40030T-BS2

Note: Models with oil seals are also available.

INC 2,000-r/min Cylindrical Servomotors

Specifications			Model	
			Straight shaft	Straight shaft with key and tap
Without brake	200 V	1 kW	-	R88M-G1K020H-S2
		1.5 kW	-	R88M-G1K520H-S2
		2 kW	-	R88M-G2K020H-S2
		3 kW	-	R88M-G3K020H-S2
		4 kW	-	R88M-G4K020H-S2
		5 kW	-	R88M-G5K020H-S2
		7.5 kW	-	R88M-G7K515H-S2
With brake	200 V	1 kW	-	R88M-G1K020H-BS2
		1.5 kW	-	R88M-G1K520H-BS2
		2 kW	-	R88M-G2K020H-BS2
		3 kW	-	R88M-G3K020H-BS2
		4 kW	-	R88M-G4K020H-BS2
		5 kW	-	R88M-G5K020H-BS2
		7.5 kW *	-	R88M-G7K515H-BS2

Note: 1. Models are not available with oil seals.

Note: 2. The rated rotation speed for 7.5-kW Servomotors is 1,500 r/min.

* UL:pending

ABS/INC 2,000-r/min Cylindrical Servomotors

Specifications			Model	
			Straight shaft	Straight shaft with key and tap
Without brake	200 V	1 kW	R88M-G1K020T	R88M-G1K020T-S2
		1.5 kW	R88M-G1K520T	R88M-G1K520T-S2
		2 kW	R88M-G2K020T	R88M-G2K020T-S2
		3 kW	R88M-G3K020T	R88M-G3K020T-S2
		4 kW	R88M-G4K020T	R88M-G4K020T-S2
		5 kW	R88M-G5K020T	R88M-G5K020T-S2
		7.5 kW	R88M-G7K515T	R88M-G7K515T-S2
With brake	200 V	1 kW	R88M-G1K020T-B	R88M-G1K020T-BS2
		1.5 kW	R88M-G1K520T-B	R88M-G1K520T-BS2
		2 kW	R88M-G2K020T-B	R88M-G2K020T-BS2
		3 kW	R88M-G3K020T-B	R88M-G3K020T-BS2
		4 kW	R88M-G4K020T-B	R88M-G4K020T-BS2
		5 kW	R88M-G5K020T-B	R88M-G5K020T-BS2
		7.5 kW *	R88M-G7K515T-B	R88M-G7K515T-BS2

Note: 1. Models with oil seals are also available.

Note: 2. The rated rotation speed for 7.5-kW Servomotors is 1,500 r/min.

* UL:pending

INC 1,000-r/min Cylindrical Servomotors

Specifications		Model	
		Straight shaft	Straight shaft with key and tap
Without brake	200 V	2 kW	- R88M-G2K010H-S2
		3 kW	- R88M-G3K010H-S2
		4.5 kW	- R88M-G4K510H-S2
		6 kW	- R88M-G6K010H-S2
With brake	200 V	2 kW	- R88M-G2K010H-BS2
		3 kW	- R88M-G3K010H-BS2
		4.5 kW	- R88M-G4K510H-BS2
		6 kW *	- R88M-G6K010H-BS2

Note: Models are not available with oil seals.

* UL:pending

ABS/INC 1,000-r/min Cylindrical Servomotors

Specifications		Model	
		Straight shaft	Straight shaft with key and tap
Without brake	200 V	900 W	R88M-G90010T R88M-G90010T-S2
		2 kW	R88M-G2K010T R88M-G2K010T-S2
		3 kW	R88M-G3K010T R88M-G3K010T-S2
		4.5 kW	R88M-G4K510T R88M-G4K510T-S2
		6 kW	R88M-G6K010T R88M-G6K010T-S2
With brake	200 V	900 W	R88M-G90010T-B R88M-G90010T-BS2
		2 kW	R88M-G2K010T-B R88M-G2K010T-BS2
		3 kW	R88M-G3K010T-B R88M-G3K010T-BS2
		4.5 kW	R88M-G4K510T-B R88M-G4K510T-BS2
		6 kW *	R88M-G6K010T-B R88M-G6K010T-BS2

Note: Models with oil seals are also available.

* UL:pending

● Decelerators

Backlash: 3 Arcminutes Max.

Decelerators for 3,000-r/min Cylindrical Servomotors

Straight shaft

Specifications		Model
Motor capacity	Gear ratio	
50 W	1/5	R88G-HPG11A05100B
	1/9	R88G-HPG11A09050B
	1/21	R88G-HPG14A21100B
	1/33	R88G-HPG14A33050B
	1/45	R88G-HPG14A45050B
100 W	1/5	R88G-HPG11A05100B
	1/11	R88G-HPG14A11100B
	1/21	R88G-HPG14A21100B
	1/33	R88G-HPG20A33100B
	1/45	R88G-HPG20A45100B
200 W	1/5	R88G-HPG14A05200B
	1/11	R88G-HPG14A11200B
	1/21	R88G-HPG20A21200B
	1/33	R88G-HPG20A33200B
	1/45	R88G-HPG20A45200B
400 W	1/5	R88G-HPG14A05400B
	1/11	R88G-HPG20A11400B
	1/21	R88G-HPG20A21400B
	1/33	R88G-HPG32A33400B
	1/45	R88G-HPG32A45400B
750 W	1/5	R88G-HPG20A05750B
	1/11	R88G-HPG20A11750B
	1/21	R88G-HPG32A21750B
	1/33	R88G-HPG32A33750B
	1/45	R88G-HPG32A45750B
1 kW	1/5	R88G-HPG32A051K0B <i>NEW</i>
	1/11	R88G-HPG32A111K0B <i>NEW</i>
	1/21	R88G-HPG32A211K0B <i>NEW</i>
	1/33	R88G-HPG32A331K0B <i>NEW</i>
	1/45	R88G-HPG50A451K0B <i>NEW</i>
1.5 kW	1/5	R88G-HPG32A052K0B <i>NEW</i>
	1/11	R88G-HPG32A112K0B <i>NEW</i>
	1/21	R88G-HPG32A211K5B <i>NEW</i>
	1/33	R88G-HPG50A332K0B <i>NEW</i>
	1/45	R88G-HPG50A451K5B <i>NEW</i>
2 kW	1/5	R88G-HPG32A052K0B <i>NEW</i>
	1/11	R88G-HPG32A112K0B <i>NEW</i>
	1/21	R88G-HPG50A212K0B <i>NEW</i>
	1/33	R88G-HPG50A332K0B <i>NEW</i>
	1/45	R88G-HPG50A451K5B <i>NEW</i>
3 kW	1/5	R88G-HPG32A053K0B <i>NEW</i>
	1/11	R88G-HPG50A113K0B <i>NEW</i>
	1/21	R88G-HPG50A213K0B <i>NEW</i>
4 kW	1/5	R88G-HPG32A054K0B <i>NEW</i>
	1/11	R88G-HPG50A115K0B <i>NEW</i>
5 kW	1/5	R88G-HPG50A055K0B <i>NEW</i>
	1/11	R88G-HPG50A115K0B <i>NEW</i>

Note: 1. The standard models have a straight shaft.

Note: 2. To order a Servomotor with a straight shaft with key, add "J" to the end of the model number, in the place indicated by the box.

Example: R88G-HPG11A05100BJ

Backlash: 3 Arcminutes Max.

Decelerators for 3,000-r/min Flat Servomotors

Straight shaft

Specifications		Model
Motor capacity	Gear ratio	
100 W	1/5	R88G-HPG11A05100PB
	1/11	R88G-HPG14A11100PB
	1/21	R88G-HPG14A21100PB
	1/33	R88G-HPG20A33100PB
	1/45	R88G-HPG20A45100PB
200 W	1/5	R88G-HPG14A05200PB
	1/11	R88G-HPG20A11200PB
	1/21	R88G-HPG20A21200PB
	1/33	R88G-HPG20A33200PB
	1/45	R88G-HPG20A45200PB
400 W	1/5	R88G-HPG20A05400PB
	1/11	R88G-HPG20A11400PB
	1/21	R88G-HPG20A21400PB
	1/33	R88G-HPG32A33400PB
	1/45	R88G-HPG32A45400PB

Note: 1. The standard models have a straight shaft.

Note: 2. To order a Servomotor with a straight shaft with key, add "J" to the end of the model number.

Backlash: 3 Arcminutes Max. *NEW*

**Decelerators for 2,000-r/min Cylindrical Servomotors
Straight shaft**

Specifications		Model
Motor capacity	Gear ratio	
1 kW	1/5	R88G-HPG32A053K0B
	1/11	R88G-HPG32A112K0SB
	1/21	R88G-HPG32A211K0SB
	1/33	R88G-HPG50A332K0SB
	1/45	R88G-HPG50A451K0SB
1.5 kW	1/5	R88G-HPG32A053K0B
	1/11	R88G-HPG32A112K0SB
	1/21	R88G-HPG50A213K0B
	1/33	R88G-HPG50A332K0SB
2 kW	1/5	R88G-HPG32A053K0B
	1/11	R88G-HPG32A112K0SB
	1/21	R88G-HPG50A213K0B
	1/33	R88G-HPG50A332K0SB
3 kW	1/5	R88G-HPG32A054K0B
	1/11	R88G-HPG50A115K0B
	1/21	R88G-HPG50A213K0SB
	1/25	R88G-HPG65A253K0SB
4 kW	1/5	R88G-HPG50A054K0SB
	1/11	R88G-HPG50A114K0SB
	1/20	R88G-HPG65A204K0SB
	1/25	R88G-HPG65A254K0SB
5 kW	1/5	R88G-HPG50A055K0SB
	1/11	R88G-HPG50A115K0SB
	1/20	R88G-HPG65A205K0SB
	1/25	R88G-HPG65A255K0SB
7.5 kW	1/5	R88G-HPG65A057K5SB
	1/12	R88G-HPG65A127K5SB

Note: 1. The standard models have a straight shaft.

Note: 2. To order a Servomotor with a straight shaft with key, add "J" to the end of the model number.

Backlash: 15 Arcminutes Max.

**Decelerators for 3,000-r/min Cylindrical Servomotors
Straight shaft with key and tap**

Specifications		Model
Motor capacity	Gear ratio	
50 W	1/5	R88G-VRSF05B100CJ
	1/9	R88G-VRSF09B100CJ
	1/15	R88G-VRSF15B100CJ
	1/25	R88G-VRSF25B100CJ
100 W	1/5	R88G-VRSF05B100CJ
	1/9	R88G-VRSF09B100CJ
	1/15	R88G-VRSF15B100CJ
	1/25	R88G-VRSF25B100CJ
200 W	1/5	R88G-VRSF05B200CJ
	1/9	R88G-VRSF09C200CJ
	1/15	R88G-VRSF15C200CJ
	1/25	R88G-VRSF25C200CJ
400 W	1/5	R88G-VRSF05C400CJ
	1/9	R88G-VRSF09C400CJ
	1/15	R88G-VRSF15C400CJ
	1/25	R88G-VRSF25C400CJ
750 W	1/5	R88G-VRSF05C750CJ
	1/9	R88G-VRSF09D750CJ
	1/15	R88G-VRSF15D750CJ
	1/25	R88G-VRSF25D750CJ

Backlash: 3 Arcminutes Max. *NEW*

**Decelerators for 1,000-r/min Cylindrical Servomotors
Straight shaft**

Specifications		Model
Motor capacity	Gear ratio	
900 W	1/5	R88G-HPG32A05900TB
	1/11	R88G-HPG32A11900TB
	1/21	R88G-HPG50A21900TB
	1/33	R88G-HPG50A33900TB
2 kW	1/5	R88G-HPG32A052K0TB
	1/11	R88G-HPG50A112K0TB
	1/21	R88G-HPG50A212K0TB
	1/25	R88G-HPG65A255K0SB
3 kW	1/5	R88G-HPG50A055K0SB
	1/11	R88G-HPG50A115K0SB
	1/20	R88G-HPG65A205K0SB
	1/25	R88G-HPG65A255K0SB
4.5 kW	1/5	R88G-HPG50A054K5TB
	1/12	R88G-HPG65A127K5SB
6 kW	1/20	R88G-HPG65A204K5TB
	1/5	R88G-HPG65A057K5SB
	1/12	R88G-HPG65A127K5SB

Note: 1. The standard models have a straight shaft.

Note: 2. Models with a key and tap are indicated with "J" at the end of the model number.

Backlash: 15 Arcminutes Max.

**Decelerators for 3,000-r/min Flat Servomotors
Straight shaft with key and tap**

Specifications		Model
Motor capacity	Gear ratio	
100 W	1/5	R88G-VRSF05B100PCJ
	1/9	R88G-VRSF09B100PCJ
	1/15	R88G-VRSF15B100PCJ
	1/25	R88G-VRSF25B100PCJ
200 W	1/5	R88G-VRSF05B200PCJ
	1/9	R88G-VRSF09C200PCJ
	1/15	R88G-VRSF15C200PCJ
	1/25	R88G-VRSF25C200PCJ
400 W	1/5	R88G-VRSF05C400PCJ
	1/9	R88G-VRSF09C400PCJ
	1/15	R88G-VRSF15C400PCJ
	1/25	R88G-VRSF25C400PCJ

● Accessories and Cables

• Servomotor Power Cables (Standard Cables) For Servomotor without brake

Specifications	Model
3,000-r/min Servomotors of 50 to 750 W, 3,000-r/min Flat Servomotors of 100 to 400 W	3 m R88A-CAGA003S
	5 m R88A-CAGA005S
	10 m R88A-CAGA010S
	15 m R88A-CAGA015S
	20 m R88A-CAGA020S
	30 m R88A-CAGA030S
	40 m R88A-CAGA040S
	50 m R88A-CAGA050S
	3 m R88A-CAGB003S
	5 m R88A-CAGB005S
3,000-r/min Servomotors of 1 to 1.5 kW, 2,000-r/min Servomotors of 1 to 1.5 kW, 1,000-r/min Servomotors of 900 W	10 m R88A-CAGB010S
	15 m R88A-CAGB015S
	20 m R88A-CAGB020S
	30 m R88A-CAGB030S
	40 m R88A-CAGB040S
	50 m R88A-CAGB050S
	3 m R88A-CAGC003S
	5 m R88A-CAGC005S
	10 m R88A-CAGC010S
	15 m R88A-CAGC015S
3,000-r/min Servomotors of 2 kW, 2,000-r/min Servomotors of 2 kW	20 m R88A-CAGC020S
	30 m R88A-CAGC030S
	40 m R88A-CAGC040S
	50 m R88A-CAGC050S
	3 m R88A-CAGD003S
	5 m R88A-CAGD005S
	10 m R88A-CAGD010S
	15 m R88A-CAGD015S
	20 m R88A-CAGD020S
	30 m R88A-CAGD030S
3,000-r/min Servomotors of 3 to 5 kW, 2,000-r/min Servomotors of 3 to 5 kW, 1,000-r/min Servomotors of 2 to 4.5 kW	40 m R88A-CAGD040S
	50 m R88A-CAGD050S
	3 m R88A-CAGE003S
	5 m R88A-CAGE005S
	10 m R88A-CAGE010S
	15 m R88A-CAGE015S
	20 m R88A-CAGE020S
	30 m R88A-CAGE030S
	40 m R88A-CAGE040S
	50 m R88A-CAGE050S
2,000-r/min Servomotors of 7.5 kW, 1,000-r/min Servomotors of 6 kW	3 m R88A-CAGE003S
	5 m R88A-CAGE005S
	10 m R88A-CAGE010S
	15 m R88A-CAGE015S
	20 m R88A-CAGE020S
	30 m R88A-CAGE030S
	40 m R88A-CAGE040S
	50 m R88A-CAGE050S

Note: There are separate connectors for power and brakes for 3,000-r/min Servomotors of 50 to 750 W, Flat Servomotors, and Servomotors of 6 kW or higher. When a Servomotor with a brake is used, it is necessary to use both a Power Cable for Servomotors without brakes and a Power Cable.

• Servomotor Power Cables (Standard Cables) For Servomotor with brake

Specifications	Model
3,000-r/min Servomotors of 1 to 1.5 kW, 2,000-r/min Servomotors of 1 to 1.5 kW, 1,000-r/min Servomotors of 900 W	3 m R88A-CAGB003B
	5 m R88A-CAGB005B
	10 m R88A-CAGB010B
	15 m R88A-CAGB015B
	20 m R88A-CAGB020B
	30 m R88A-CAGB030B
	40 m R88A-CAGB040B
	50 m R88A-CAGB050B
	3 m R88A-CAGC003B
	5 m R88A-CAGC005B
3,000-r/min Servomotors of 2 kW, 2,000-r/min Servomotors of 2 kW	10 m R88A-CAGC010B
	15 m R88A-CAGC015B
	20 m R88A-CAGC020B
	30 m R88A-CAGC030B
	40 m R88A-CAGC040B
	50 m R88A-CAGC050B
	3 m R88A-CAGD003B
	5 m R88A-CAGD005B
	10 m R88A-CAGD010B
	15 m R88A-CAGD015B
3,000-r/min Servomotors of 3 to 5 kW, 2,000-r/min Servomotors of 3 to 5 kW, 1,000-r/min Servomotors of 2 to 4.5 kW	20 m R88A-CAGD020B
	30 m R88A-CAGD030B
	40 m R88A-CAGD040B
	50 m R88A-CAGD050B
	3 m R88A-CAGD003B
	5 m R88A-CAGD005B
	10 m R88A-CAGD010B
	15 m R88A-CAGD015B
	20 m R88A-CAGD020B
	30 m R88A-CAGD030B
1,500-r/min Servomotors of 7.5 kW, 1,000-r/min Servomotors of 6 kW	40 m R88A-CAGD040B
	50 m R88A-CAGD050B
	3 m R88A-CAGE003B
	5 m R88A-CAGE005B
	10 m R88A-CAGE010B
	15 m R88A-CAGE015B
	20 m R88A-CAGE020B
	30 m R88A-CAGE030B
	40 m R88A-CAGE040B
	50 m R88A-CAGE050B

• Brake Cables (Standard Cables)

Specifications	Model
3,000-r/min Servomotors of 50 to 750 W, 3,000-r/min Flat Servomotors of 100 to 400 W	3 m R88A-CAGA003B
	5 m R88A-CAGA005B
	10 m R88A-CAGA010B
	15 m R88A-CAGA015B
	20 m R88A-CAGA020B
	30 m R88A-CAGA030B
	40 m R88A-CAGA040B
	50 m R88A-CAGA050B
	3 m R88A-CAGC003B
	5 m R88A-CAGC005B
1,500-r/min Servomotors of 7.5 kW, 1,000-r/min Servomotors of 6 kW	10 m R88A-CAGC010B
	15 m R88A-CAGC015B
	20 m R88A-CAGC020B
	30 m R88A-CAGC030B
	40 m R88A-CAGC040B
	50 m R88A-CAGC050B
	3 m R88A-CAGD003B
	5 m R88A-CAGD005B
	10 m R88A-CAGD010B
	15 m R88A-CAGD015B
3,000-r/min Servomotors of 3 to 5 kW, 2,000-r/min Servomotors of 3 to 5 kW, 1,000-r/min Servomotors of 2 to 4.5 kW	20 m R88A-CAGD020B
	30 m R88A-CAGD030B
	40 m R88A-CAGD040B
	50 m R88A-CAGD050B
	3 m R88A-CAGE003B
	5 m R88A-CAGE005B
	10 m R88A-CAGE010B
	15 m R88A-CAGE015B
	20 m R88A-CAGE020B
	30 m R88A-CAGE030B
1,500-r/min Servomotors of 7.5 kW, 1,000-r/min Servomotors of 6 kW	40 m R88A-CAGE040B
	50 m R88A-CAGE050B
	3 m R88A-CAGE003B
	5 m R88A-CAGE005B
	10 m R88A-CAGE010B
	15 m R88A-CAGE015B
	20 m R88A-CAGE020B
	30 m R88A-CAGE030B
	40 m R88A-CAGE040B
	50 m R88A-CAGE050B

• Encoder Cables (Standard Cables)

Specifications	Model
3,000-r/min Servomotors of 50 to 750 W with an absolute encoder, 3,000-r/min Flat Servomotors of 100 to 400 W with an absolute encoder	3 m R88A-CRGA003C
	5 m R88A-CRGA005C
	10 m R88A-CRGA010C
	15 m R88A-CRGA015C
	20 m R88A-CRGA020C
	30 m R88A-CRGA030C
	40 m R88A-CRGA040C
	50 m R88A-CRGA050C
3,000-r/min Servomotors of 50 to 750 W with an incremental encoder, 3,000-r/min Flat Servomotors of 100 to 400 W with an incremental encoder	3 m R88A-CRGB003C
	5 m R88A-CRGB005C
	10 m R88A-CRGB010C
	15 m R88A-CRGB015C
	20 m R88A-CRGB020C
	30 m R88A-CRGB030C
	40 m R88A-CRGB040C
	50 m R88A-CRGB050C
3,000-r/min Servomotors of 1 to 5 kW, 2,000-r/min Servomotors of 1 to 5 kW, 1,500-r/min Servomotors of 7.5 kW, 1,000-r/min Servomotors of 900 W to 6 kW	3 m R88A-CRGC003N
	5 m R88A-CRGC005N
	10 m R88A-CRGC010N
	15 m R88A-CRGC015N
	20 m R88A-CRGC020N
	30 m R88A-CRGC030N
	40 m R88A-CRGC040N
	50 m R88A-CRGC050N

• Absolute Encoder Battery Cable **NEW**

Specifications	Model
Absolute Encoder Battery Cable (Battery not included.)	0.3 m R88A-CRGD0R3C
Absolute Encoder Battery Cable (One R88A-BAT01G Battery included.)	0.3 m R88A-CRGD0R3C-BS

• Absolute Encoder Backup Battery

Specifications	Model
2,000 mA·h 3.6 V	R88A-BAT01G

• Servomotor Power Cables (Robot Cables) **NEW**

For Servomotor without brake

Specifications	Model
3,000-r/min Servomotors of 50 to 750 W, 3,000-r/min Flat Servomotors of 100 to 400 W	3 m R88A-CAGA003SR
	5 m R88A-CAGA005SR
	10 m R88A-CAGA010SR
	15 m R88A-CAGA015SR
	20 m R88A-CAGA020SR
	30 m R88A-CAGA030SR
	40 m R88A-CAGA040SR
	50 m R88A-CAGA050SR
3,000-r/min Servomotors of 1 to 1.5 kW, 2,000-r/min Servomotors of 1 to 1.5 kW, 1,000-r/min Servomotors of 900 W	3 m R88A-CAGB003SR
	5 m R88A-CAGB005SR
	10 m R88A-CAGB010SR
	15 m R88A-CAGB015SR
	20 m R88A-CAGB020SR
	30 m R88A-CAGB030SR
	40 m R88A-CAGB040SR
	50 m R88A-CAGB050SR
3,000-r/min Servomotors of 2 kW, 2,000-r/min Servomotors of 2 kW	3 m R88A-CAGC003SR
	5 m R88A-CAGC005SR
	10 m R88A-CAGC010SR
	15 m R88A-CAGC015SR
	20 m R88A-CAGC020SR
	30 m R88A-CAGC030SR
	40 m R88A-CAGC040SR
	50 m R88A-CAGC050SR
3,000-r/min Servomotors of 3 to 5 kW, 2,000-r/min Servomotors of 3 to 5 kW, 1,000-r/min Servomotors of 2 to 4.5 kW	3 m R88A-CAGD003SR
	5 m R88A-CAGD005SR
	10 m R88A-CAGD010SR
	15 m R88A-CAGD015SR
	20 m R88A-CAGD020SR
	30 m R88A-CAGD030SR
	40 m R88A-CAGD040SR
	50 m R88A-CAGD050SR

• Servomotor Power Cables (Robot Cables) ***NEW***

For Servomotor with brake

Specifications	Model
	3 m R88A-CAGB003BR
3,000-r/min Servomotors of 1 to 1.5 kW, 2,000-r/min Servomotors of 1 to 1.5 kW, 1,000-r/min Servomotors of 900 W	5 m R88A-CAGB005BR
	10 m R88A-CAGB010BR
	15 m R88A-CAGB015BR
	20 m R88A-CAGB020BR
	30 m R88A-CAGB030BR
	40 m R88A-CAGB040BR
	50 m R88A-CAGB050BR
	3 m R88A-CAGC003BR
3,000-r/min Servomotors of 2 kW, 2,000-r/min Servomotors of 2 kW	5 m R88A-CAGC005BR
	10 m R88A-CAGC010BR
	15 m R88A-CAGC015BR
	20 m R88A-CAGC020BR
	30 m R88A-CAGC030BR
	40 m R88A-CAGC040BR
	50 m R88A-CAGC050BR
	3 m R88A-CAGD003BR
3,000-r/min Servomotors of 3 to 5 kW, 2,000-r/min Servomotors of 3 to 5 kW, 1,000-r/min Servomotors of 2 to 4.5 kW	5 m R88A-CAGD005BR
	10 m R88A-CAGD010BR
	15 m R88A-CAGD015BR
	20 m R88A-CAGD020BR
	30 m R88A-CAGD030BR
	40 m R88A-CAGD040BR
	50 m R88A-CAGD050BR

• Encoder Cables (Robot Cables) ***NEW***

Specifications	Model
	3 m R88A-CRGA003CR
3,000-r/min Servomotors of 50 to 750 W with an absolute encoder, 3,000-r/min Flat Servomotors of 100 to 400 W with an absolute encoder	5 m R88A-CRGA005CR
	10 m R88A-CRGA010CR
	15 m R88A-CRGA015CR
	20 m R88A-CRGA020CR
	30 m R88A-CRGA030CR
	40 m R88A-CRGA040CR
	50 m R88A-CRGA050CR
	3 m R88A-CRGB003CR
3,000-r/min Servomotors of 50 to 750 W with an incremental encoder, 3,000-r/min Flat Servomotors of 100 to 400 W with an incremental encoder	5 m R88A-CRGB005CR
	10 m R88A-CRGB010CR
	15 m R88A-CRGB015CR
	20 m R88A-CRGB020CR
	30 m R88A-CRGB030CR
	40 m R88A-CRGB040CR
	50 m R88A-CRGB050CR
	3 m R88A-CRGC003NR
3,000-r/min Servomotors of 1 to 5 kW, 2,000-r/min Servomotors of 1 to 5 kW, 1,500-r/min Servomotors of 7.5 kW, 1,000-r/min Servomotors of 900 W to 6 kW	5 m R88A-CRGC005NR
	10 m R88A-CRGC010NR
	15 m R88A-CRGC015NR
	20 m R88A-CRGC020NR
	30 m R88A-CRGC030NR
	40 m R88A-CRGC040NR
	50 m R88A-CRGC050NR

• Connectors

Specifications	Model
Servomotor Connector for Encoder Cable	Absolute Encoder R88A-CNG01R
	Incremental Encoder R88A-CNG02R
Control I/O Connector (CN1)	R88A-CNU11C*
	R88A-CNU01C#
Encoder Connector (CN2)	R88A-CNW01R
Power Cable Connector (750 W max.)	R88A-CNG01A <i>NEW</i>
Brake Cable Connector (750 W max.)	R88A-CNG01B <i>NEW</i>

* For R88D-GT only.

For R88D-GN□-ML2 only.

• Brake Cables (Robot Cables) ***NEW***

Specifications	Model
	3 m R88A-CAGA003BR
3,000-r/min Servomotors of 50 to 750 W, 3,000-r/min Flat Servomotors of 100 to 400 W	5 m R88A-CAGA005BR
	10 m R88A-CAGA010BR
	15 m R88A-CAGA015BR
	20 m R88A-CAGA020BR
	30 m R88A-CAGA030BR
	40 m R88A-CAGA040BR
	50 m R88A-CAGA050BR

• Communications Cables

Specifications	Model
Personal Computer Monitor Cable RS-232 Communications	2 m R88A-CCG002P2
RS-485 Communications Cable *	0.5 m R88A-CCG0R5P4
	1 m R88A-CCG001P4

* For R88D-GP and R88D-GT only.

• Servo Relay Units (for CN1) *

Specifications	Model
For CS1W-NC113/-NC133	
For CJ1W-NC113/-NC133	XW2B-20J6-1B
For C200HW-NC113	
For CS1W-NC213/-NC413/-NC233/-NC433	
For CJ1W-NC213/-NC413/-NC233/-NC433	XW2B-40J6-2B
For C200HW-NC213/-NC413	
For CJ1M-CPU21/-CPU22/-CPU23 (for 1 axis)	XW2B-20J6-8A
For CJ1M-CPU21/-CPU22/-CPU23 (for 2 axis)	XW2B-40J6-9A
For FQM1-MMA22	
For FQM1-MMP22	XW2B-80J7-12A
For CQM1H-PLB21	XW2B-20J6-3B

* For R88D-GT only.

• Servo Relay Unit Cables (for Servo Drives) *

Specifications	Model
For Position Control Unit (XW2B-20J6-1B/XW2B-40J6-2B)	1 m XW2Z-100J-B25
For CQM1H-PLB21 (XW2B-20J6-3B)	2 m XW2Z-200J-B25
For CJ1M-CPU21/-CPU22/-CPU23 (XW2B-20J6-8A/XW2B-40J6-9A)	1 m XW2Z-100J-B31
	2 m XW2Z-200J-B31
For FQM1-MMA22 (XW2B-80J7-12A)	1 m XW2Z-100J-B27
	2 m XW2Z-200J-B27
For FQM1-MMP22 (XW2B-80J7-12A)	1 m XW2Z-100J-B26
	2 m XW2Z-200J-B26

• Control Cables *

Specifications	Model
Motion Control Unit Cables for 1 axis CS1W-MC221-V1/-MC421-V1	1 m R88A-CPG001M1
	2 m R88A-CPG002M1
	3 m R88A-CPG003M1
	5 m R88A-CPG005M1
Motion Control Unit Cables for 2 axes CS1W-MC221-V1/-MC421-V1	1 m R88A-CPG001M2
	2 m R88A-CPG002M2
	3 m R88A-CPG003M2
	5 m R88A-CPG005M2
General-purpose Control Cables with Connector on One End	1 m R88A-CPG001S
	2 m R88A-CPG002S
Connector-Terminal Block Cables	1 m XW2Z-100J-B24
	2 m XW2Z-200J-B24
Connector Terminal Block Conversion Unit	M3 screw type XW2B-50G4
	M3.5 screw type XW2B-50G5
	M3 screw type XW2D-50G6

• Servo Relay Unit Cables (for Position Control Units)*

Specifications	Model
For CQM1H-PLB21 (XW2B-20J6-3B)	0.5 m XW2Z-050J-A3
	1 m XW2Z-100J-A3
For CS1W-NC113, C200HW-NC113 (XW2B-20J6-1B)	0.5 m XW2Z-050J-A6
	1 m XW2Z-100J-A6
For CS1W-NC213/-NC413, C200HW-NC213/-NC413 (XW2B-20J6-2B)	0.5 m XW2Z-050J-A7
	1 m XW2Z-100J-A7
For CS1W-NC133 (XW2B-20J6-1B)	0.5 m XW2Z-050J-A10
	1 m XW2Z-100J-A10
For CS1W-NC233/-NC433 (XW2B-20J6-2B)	0.5 m XW2Z-050J-A11
	1 m XW2Z-100J-A11
For CJ1W-NC113 (XW2B-20J6-1B)	0.5 m XW2Z-050J-A14
	1 m XW2Z-100J-A14
For CJ1W-NC213/-NC413 (XW2B-20J6-2B)	0.5 m XW2Z-050J-A15
	1 m XW2Z-100J-A15
For CJ1W-NC133 (XW2B-20J6-1B)	0.5 m XW2Z-050J-A18
	1 m XW2Z-100J-A18
For CJ1W-NC233/-NC433 (XW2B-20J6-2B)	0.5 m XW2Z-050J-A19
	1 m XW2Z-100J-A19
For CJ1M-CPU21/-CPU22/-CPU23 (XW2B-20J6-8A/XW2B-40J6-9A)	0.5 m XW2Z-050J-A33
	1 m XW2Z-100J-A33
For FQM1-MMA22 (XW2B-80J7-12A)	0.5 m XW2Z-050J-A28
	1 m XW2Z-100J-A28
	2 m XW2Z-200J-A28
	0.5 m XW2Z-050J-A31
For FQM1-MMP22 (XW2B-80J7-12A)	1 m XW2Z-100J-A31
	2 m XW2Z-200J-A31
	0.5 m XW2Z-050J-A28
	1 m XW2Z-100J-A28
	2 m XW2Z-200J-A28
For FQM1-MMP22 (XW2B-80J7-12A)	0.5 m XW2Z-050J-A30
	1 m XW2Z-100J-A30
	2 m XW2Z-200J-A30

*Note: For R88D-GT Servo Drivers only.

• Control Cables*

Specifications		Model
Connector Terminal Block Cables	1 m	XW2Z-100J-B33 NEW
	2 m	XW2Z-200J-B33 NEW
Connector Terminal Block	M3 screw type	XW2B-20G4
	M3.5 screw type	XW2B-20G5
	M3 screw type	XW2D-20G6

*For R88D-GN□-ML2 Servo Drives.

• MECHATROLINK-related Devices and Cables (Manufactured by Yaskawa Corporation)

Name	OMRON model number	Yaskawa model number
MECHATROLINK-II Cables (with ring core and USB connector on both ends)	0.5 m	FNY-W6003-A5
	1.0 m	FNY-W6003-01
	3.0 m	FNY-W6003-03
	5.0 m	FNY-W6003-05
	10.0 m	FNY-W6003-10
	20.0 m	FNY-W6003-20
	30.0 m	FNY-W6003-30
MECHATROLINK-II Terminating Resistor	Terminating resistance	FNY-W6022
MECHATROLINK-II Repeater	Communications Repeater	FNY-REP2000

Note: MECHATROLINK-related Devices and Cables are manufactured by Yaskawa Corporation, but they can be ordered directly from OMRON using the OMRON model numbers. (Yaskawa-brand products will be delivered even when they are ordered from OMRON.)

• External Regeneration Resistors

Specifications	Model
20 W, 50 Ω	R88A-RR08050S
20 W, 100 Ω	R88A-RR080100S
70 W, 47 Ω	R88A-RR22047S
500 W, 20 Ω	R88A-RR50020S NEW

• Reactors

Specifications	Model
R88D-G□A5L/-G□01H	3G3AX-DL2002
R88D-G□01L/-G□02H	3G3AX-DL2004
R88D-G□02L/-G□04H	3G3AX-DL2007
R88D-GT04L/-GT08H/-G□10H	3G3AX-DL2015
R88D-G□15H	3G3AX-DL2022
R88D-GT08H/-GT10H/-GT15H	3G3AX-AL2025
R88D-GT20H/-GT30H	3G3AX-AL2055
R88D-GT50H	3G3AX-AL2110
R88D-GT75H	3G3AX-AL2220

• Mounting Brackets (L Brackets for Rack Mounting)

Specifications	Model
R88D-GTA5L/-GT01L/-GT01H/-GT02H	R88A-TK01G
R88D-GT02L/-GT04H	R88A-TK02G
R88D-GT04L/-GT08H	R88A-TK03G
R88D-GT10H/-GT15H	R88A-TK04G

• Parameter Unit

Specifications	Model
Parameter Unit	R88A-PR02G

Servo Drive-Servomotor Combinations

Only the Servomotor and Servo Drive combinations listed here can be used. Do not use other combinations.

● 3,000-r/min Cylindrical Servomotors and Servo Drives

Voltage	Servo Drive	Servomotor		
		Rated output	With incremental encoder	With absolute encoder
100 V	R88D-G□A5L(-ML2)	50 W	R88M-G05030H-□	R88M-G05030T-□
	R88D-G□01L(-ML2)	100 W	R88M-G10030L-□	R88M-G10030S-□
	R88D-G□02L(-ML2)	200 W	R88M-G20030L-□	R88M-G20030S-□
	R88D-G□04L(-ML2)	400 W	R88M-G40030L-□	R88M-G40030S-□
Single-phase 200 V	R88D-G□01H(-ML2)	50 W	R88M-G05030H-□	R88M-G05030T-□
		100 W	R88M-G10030H-□	R88M-G10030T-□
	R88D-G□02H(-ML2)	200 W	R88M-G20030H-□	R88M-G20030T-□
	R88D-G□04H(-ML2)	400 W	R88M-G40030H-□	R88M-G40030T-□
Single-phase/ Three-phase 200 V	R88D-G□08H(-ML2)	750 W	R88M-G75030H-□	R88M-G75030T-□
	R88D-G□15H(-ML2)	1 kW	R88M-G1K030H-□	R88M-G1K030T-□
		1.5 kW	R88M-G1K530H-□	R88M-G1K530T-□
	Three-phase 200 V	2 kW	R88M-G2K030H-□	R88M-G2K030T-□
		3 kW	R88M-G3K030H-□	R88M-G3K030T-□
		4 kW	R88M-G4K030H-□	R88M-G4K030T-□
		5 kW	R88M-G5K030H-□	R88M-G5K030T-□

● 3,000-r/min Flat Cylindrical Servomotors and Servo Drives

Voltage	Servo Drive	Servomotor		
		Rated output	With incremental encoder	With absolute encoder
100 V	R88D-G□01L(-ML2)	100 W	R88M-GP10030L-□	R88M-GP10030S-□
	R88D-G□02L(-ML2)	200 W	R88M-GP20030L-□	R88M-GP20030S-□
	R88D-G□04L(-ML2)	400 W	R88M-GP40030L-□	R88M-GP40030S-□
Single-phase / Three phase 200 V	R88D-G□01L(-ML2)	100 W	R88M-GP10030H-□	R88M-GP10030T-□
	R88D-G□02L(-ML2)	200 W	R88M-GP20030H-□	R88M-GP20030T-□
	R88D-G□04L(-ML2)	400 W	R88M-GP40030H-□	R88M-GP40030T-□

● 2,000-r/min Cylindrical Servomotors and Servo Drives

Voltage	Servo Drive	Servomotor		
		Rated output	With incremental encoder	With absolute encoder
Single-phase/ Three-phase 200 V	R88D-G□10H(-ML2)	1 kW	R88M-G1K020H-□	R88M-G1K020T-□
	R88D-G□15H(-ML2)	1.5 kW	R88M-G1K520H-□	R88M-G1K520T-□
Three-phase 200 V	R88D-G□20H(-ML2)	2 kW	R88M-G2K020H-□	R88M-G2K020T-□
	R88D-G□30H(-ML2)	3 kW	R88M-G3K020H-□	R88M-G3K020T-□
	R88D-G□50H(-ML2)	4 kW	R88M-G4K020H-□	R88M-G4K020T-□
		5 kW	R88M-G5K020H-□	R88M-G5K020T-□
	R88D-G□75H(-ML2)	7.5 kW	R88M-G7K515H-□	R88M-G7K515T-□

● 1,000-r/min Cylindrical Servomotors and Servo Drives

Voltage	Servo Drive	Servomotor		
		Rated output	With incremental encoder	With absolute encoder
Single-phase/ Three-phase 200 V	R88D-G□15H(-ML2)	900 W	-	R88M-G90010T-□
Three-phase 200 V	R88D-G□30H(-ML2)	2 kW	R88M-G2K010H-□	R88M-G2K010T-□
	R88D-G□50H(-ML2)	3 kW	R88M-G3K010H-□	R88M-G3K010T-□
		4.5 kW	R88M-G4K510H-□	R88M-G4K510T-□
	R88D-G□75H(-ML2)	6 kW	R88M-G6K010H-□	R88M-G6K010T-□

Servomotor and Decelerator Combinations

● 3,000-r/min Cylindrical Servomotors

Motor model	1/5	1/11 (1/9 for flange size No.11)	1/21	1/33	1/45
R88M-G05030□	R88G-HPG11A05100B□ (Also used with R88M-G10030□)	R88G-HPG11A09050B□ (Gear ratio 1/9)	R88G-HPG14A21100B□ (Also used with R88M-G10030□)	R88G-HPG14A33050B□	R88G-HPG14A45050B□
R88M-G10030□	R88G-HPG11A05100B□	R88G-HPG14A11100B□	R88G-HPG14A21100B□	R88G-HPG20A33100B□	R88G-HPG20A45100B□
R88M-G20030□	R88G-HPG14A05200B□	R88G-HPG14A11200B□	R88G-HPG20A21200B□	R88G-HPG20A33200B□	R88G-HPG20A45200B□
R88M-G40030□	R88G-HPG14A05400B□	R88G-HPG20A11400B□	R88G-HPG20A21400B□	R88G-HPG32A33400B□	R88G-HPG32A45400B□
R88M-G75030□	R88G-HPG20A05750B□	R88G-HPG20A11750B□	R88G-HPG32A21750B□	R88G-HPG32A33750B□	R88G-HPG32A45750B□
R88M-G1K030□	R88G-HPG32A051K0B□	R88G-HPG32A111K0B□	R88G-HPG32A211K0B□	R88G-HPG32A331K0B□	R88G-HPG50A451K0B□
R88M-G1K530□	R88G-HPG32A052K0B□ (Also used with R88M-G2K030T)	R88G-HPG32A112K0B□ (Also used with R88M-G2K030T)	R88G-HPG32A211K5B□	R88G-HPG50A332K0B□ (Also used with R88M-G2K030T)	R88G-HPG50A451K5B□
R88M-G2K030□	R88G-HPG32A052K0B□	R88G-HPG32A112K0B□	R88G-HPG50A212K0B□	R88G-HPG50A332K0B□	—
R88M-G3K030□	R88G-HPG32A053K0B□	R88G-HPG50A113K0B□	R88G-HPG50A213K0B□	—	—
R88M-G4K030□	R88G-HPG32A054K0B□	R88G-HPG50A115K0B□ (Also used with R88M-G5K030T)	—	—	—
R88M-G5K030□	R88G-HPG50A055K0B□	R88G-HPG50A115K0B□	—	—	—

● 3,000-r/min Flat Servomotors

Motor model	1/5	1/11	1/21	1/33	1/45
R88M-GP10030□	R88G-HPG11A05100PB□	R88G-HPG14A11100PB□	R88G-HPG14A21100PB□	R88G-HPG20A33100PB□	R88G-HPG20A45100PB□
R88M-GP20030□	R88G-HPG14A05200PB□	R88G-HPG20A11200PB□	R88G-HPG20A21200PB□	R88G-HPG20A33200PB□	R88G-HPG20A45200PB□
R88M-GP40030□	R88G-HPG20A05400PB□	R88G-HPG20A11400PB□	R88G-HPG20A21400PB□	R88G-HPG32A33400PB□	R88G-HPG32A45400PB□


● 2,000-r/min Cylindrical Servomotors

Motor model	1/5	1/11 (1/12 for flange size No.65)	1/21 (1/20 for flange size No.65)	1/33 (1/25 for flange size No.65)	1/45
R88M-G1K020□	R88G-HPG32A053K0B□ (Also used with R88M-G3K030T)	R88G-HPG32A112K0SB□ (Also used with R88M-G2K020T)	R88G-HPG32A211K0SB□	R88G-HPG50A332K0SB□ (Also used with R88M-G2K020T)	R88G-HPG50A451K0SB□
R88M-G1K520□	R88G-HPG32A053K0B□ (Also used with R88M-G3K030T)	R88G-HPG32A112K0SB□ (Also used with R88M-G2K020T)	R88G-HPG50A213K0B□ (Also used with R88M-G3K030T)	R88G-HPG50A332K0SB□ (Also used with R88M-G2K020T)	—
R88M-G2K020□	R88G-HPG32A053K0B□ (Also used with R88M-G3K030T)	R88G-HPG32A112K0SB□	R88G-HPG50A213K0B□ (Also used with R88M-G3K030T)	R88G-HPG50A332K0SB□	—
R88M-G3K020□	R88G-HPG32A054K0B□ (Also used with R88M-G4K030T)	R88G-HPG50A115K0B□ (Also used with R88M-G5K030T)	R88G-HPG50A213K0SB□	R88G-HPG65A253K0SB□	—
R88M-G4K020□	R88G-HPG50A054K0SB□	R88G-HPG50A114K0SB□	R88G-HPG65A204K0SB□	R88G-HPG65A254K0SB□	—
R88M-G5K020□	R88G-HPG50A055K0SB□	R88G-HPG50A115K0SB□	R88G-HPG65A205K0SB□	R88G-HPG65A255K0SB□	—
R88M-G7K515□	R88G-HPG65A057K5SB□	R88G-HPG65A127K5SB□	—	—	—

● 1,000-r/min Cylindrical Servomotors











Motor model	1/5	1/11 (1/12 for flange size No.65)	1/21 (1/20 for flange size No.65)	1/33 (1/25 for flange size No.65)
R88M-G90010T	R88G-HPG32A05900TB□	R88G-HPG32A11900TB□	R88G-HPG50A21900TB□	R88G-HPG50A33900TB□
R88M-G2K010□	R88G-HPG32A052K0TB□	R88G-HPG50A112K0TB□	R88G-HPG50A212K0TB□	R88G-HPG65A255K0SB□ (Also used with R88M-G5K020T)
R88M-G3K010□	R88G-HPG50A055K0SB□ (Also used with R88M-G5K020T)	R88G-HPG50A115K0SB□ (Also used with R88M-G5K020T)	R88G-HPG65A205K0SB□ (Also used with R88M-G5K020T)	R88G-HPG65A255K0SB□ (Also used with R88M-G5K020T)
R88M-G4K510□	R88G-HPG50A054K5TB□	R88G-HPG65A127K5SB□ (Also used with R88M-G7K515T)	R88G-HPG65A204K5TB□	—
R88M-G6K010□	R88G-HPG65A057K5SB□ (Also used with R88M-G7K515T)	R88G-HPG65A127K5SB□ (Also used with R88M-G7K515T)	—	—

Cable Combinations (For R88D-GT)

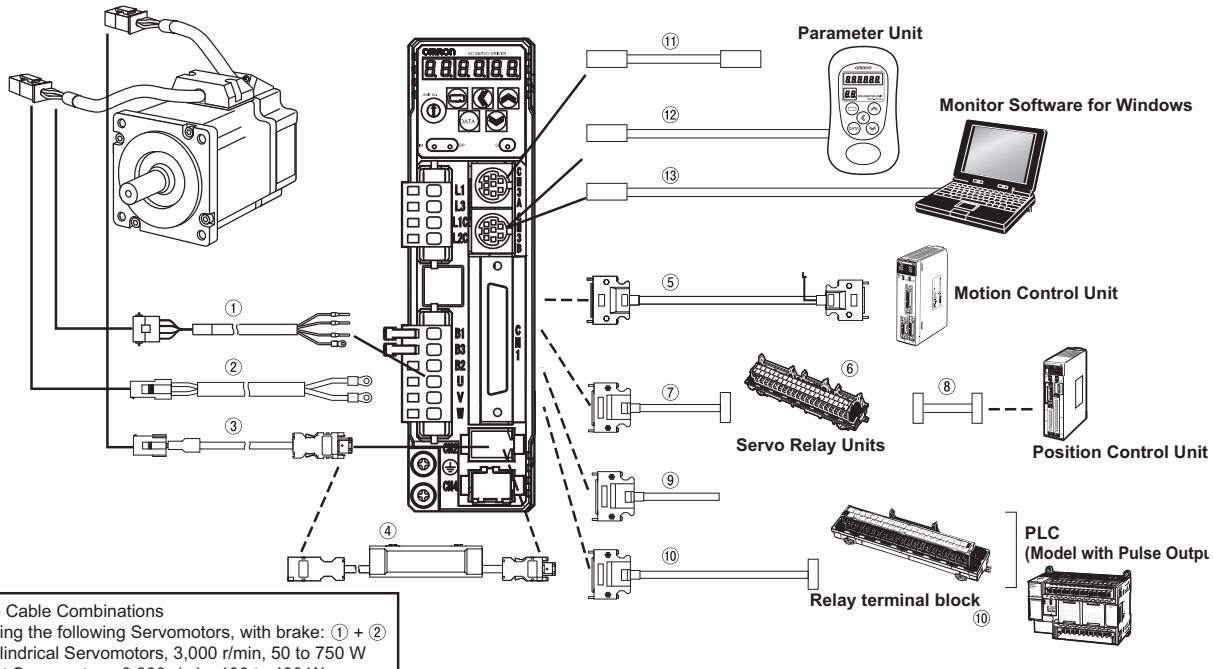

● Power Supply Cables (for CNB) (SR Connection Cables)

Symbol	Name	Connected to	Model	Description
①	Standard Servomotor Power Cables for Servomotors without Brakes	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W Flat Servomotors, 3,000 r/min, 100 to 400 W	R88A-CAGA□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Connector: 172159-1 (Tyco Electronics AMP KK) Connector pins: 170362-1 (Tyco Electronics AMP KK) 170366-1 (Tyco Electronics AMP KK)
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W	R88A-CAGB□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: N/M3106B20-4S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 2 kW Cylindrical Servomotors, 2,000 r/min, 2 kW	R88A-CAGC□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: N/M3106B20-4S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 3 to 5 kW Cylindrical Servomotors, 2,000 r/min, 3 to 5 kW Cylindrical Servomotors, 1,000 r/min, 2 to 4.5 kW	R88A-CAGD□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: N/M3106B22-22S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 1,500 r/min, 7.5 kW Cylindrical Servomotors, 1,000 r/min, 6 kW	R88A-CAGE□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: N/M3106B32-17S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-20A (Japan Aviation Electronics Industry, Ltd.)

Symbol	Name	Connected to	Model	Description
①	Standard Servomotor Power Cables for Servomotors with Brakes	Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W	R88A-CAGB□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B20-18S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.) 
		Cylindrical Servomotors, 3,000 r/min, 2 kW Cylindrical Servomotors, 2,000 r/min, 2 kW	R88A-CAGC□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B20-18S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.) 
		Cylindrical Servomotors, 3,000 r/min, 3 to 5 kW Cylindrical Servomotors, 2,000 r/min, 3 to 5 kW Cylindrical Servomotors, 1,000 r/min, 2 to 4.5 kW	R88A-CAGD□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B24-11S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-16A (Japan Aviation Electronics Industry, Ltd.) 
	Robot Servomotor Power Cables for Servomotors without Brakes	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W Flat Servomotors, 3,000 r/min, 100 to 400 W	R88A-CAGA□□□SR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Connector: 172159-1 (Tyco Electronics AMP KK) Connector pins: 170362-1 (Tyco Electronics AMP KK) 170366-1 (Tyco Electronics AMP KK) 
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W	R88A-CAGB□□□SR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B20-4S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.) 
		Cylindrical Servomotors, 3,000 r/min, 2 kW Cylindrical Servomotors, 2,000 r/min, 2 kW	R88A-CAGC□□□SR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B22-4S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.) 
	Robot Servomotor Power Cables for Servomotors with Brakes	Cylindrical Servomotors, 3,000 r/min, 3 to 5 kW Cylindrical Servomotors, 2,000 r/min, 3 to 5 kW Cylindrical Servomotors, 1,000 r/min, 2 to 4.5 kW	R88A-CAGD□□□SR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B22-22S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.) 
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W	R88A-CAGB□□□BR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B20-18S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.) 
		Cylindrical Servomotors, 3,000 r/min, 2 kW Cylindrical Servomotors, 2,000 r/min, 2 kW	R88A-CAGC□□□BR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B20-18S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.) 
		Cylindrical Servomotors, 3,000 r/min, 3 to 5 kW Cylindrical Servomotors, 2,000 r/min, 3 to 5 kW Cylindrical Servomotors, 1,000 r/min, 2 to 4.5 kW	R88A-CAGD□□□BR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B24-11S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-16A (Japan Aviation Electronics Industry, Ltd.) 

● Brake Cables

Symbol	Name	Connected to	Model	Description
②	Standard Brake Cables	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W Flat Servomotors, 3,000 r/min, 100 to 400 W	R88A-CAGA□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Connector: 172157-1 (Tyco Electronics AMP KK) Connector pins: 170362-1 (Tyco Electronics AMP KK) 170366-1 (Tyco Electronics AMP KK)
		Cylindrical Servomotors, 1,500 r/min, 7.5 kW Cylindrical Servomotors, 1,000 r/min, 6 kW	R88A-CAGE□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: N/MS3106B14-2S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/MS3057-6A (Japan Aviation Electronics Industry, Ltd.)
	Robot Brake Cables	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W Flat Servomotors, 3,000 r/min, 100 to 400 W	R88A-CAGA□□□BR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Connector: 172157-1 (Tyco Electronics AMP KK) Connector pins: 170362-1 (Tyco Electronics AMP KK) 170366-1 (Tyco Electronics AMP KK)

● Encoder Cables (for CN2)

Symbol	Name	Connected to	Model	Description
③	Standard Encoder Cables with Connectors	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W, absolute encoder Flat Servomotors, 3,000 r/min, 100 to 400 W, absolute encoder	R88A-CRGA□□□C The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: 3 to 20 m: Crimped I/O connector: (Molex Japan Co., Ltd.) 30 to 50 m: 55100-0670 (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 50 to 750 W, incremental encoder Flat Servomotors, 3,000 r/min, 100 to 400 W, incremental encoder	R88A-CRGB□□□C The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: 3 to 20 m: Crimped I/O connector: (Molex Japan Co., Ltd.) 30 to 50 m: 55100-0670 (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 5 kW Cylindrical Servomotors, 1,500 r/min, 7.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W to 6 kW	R88A-CRCG□□□N The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: 3 to 20 m: Crimped I/O connector: (Molex Japan Co., Ltd.) 30 to 50 m: 55100-0670 (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
④	Robot Encoder Cables with Connectors	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W, absolute encoder Flat Servomotors, 3,000 r/min, 100 to 400 W, absolute encoder	R88A-CRGA□□□CR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: Crimped I/O connector: (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 50 to 750 W, incremental encoder Flat Servomotors, 3,000 r/min, 100 to 400 W, incremental encoder	R88A-CRGB□□□CR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: Crimped I/O connector: (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 5 kW Cylindrical Servomotors, 1,500 r/min, 7.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W to 6 kW	R88A-CRCG□□□NR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: Crimped I/O connector: (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)

● Absolute Encoder Backup Battery and Absolute Encoder Battery Cable

Symbol	Name	Contents	Length (m)	Model	Description
④	Absolute Encoder Battery Cable	Battery not included.	0.3 m	R88A-CRGD0R3C	
		One R88A-BAT01G Battery included.	0.3 m	R88A-CRGD0R3C-BS	
	Absolute Encoder Backup Battery	—	—	R88A-BAT01G	—

● Control Cables (for CN1)

Symbol	Name	Connected to	Model
⑤	Control Cables	Motion Control Units (for all SYSMAC CS1/C200H)	R88A-CPG□□□M◆ The empty boxes in the model number are for the cable length. The cable can be 1, 2, 3, or 5 m long. The empty diamond in the model number is for the number of axes. One axis: 1, Two axes: 2
⑥	Servo Relay Units	CJ1W-NC113/NC133 CS1W-NC113/NC133 (C200HW-NC113)	XW2B-20J6-1B
		CJ1W-NC213/NC233/NC413/NC433 CS1W-NC213/NC233/NC413/NC433 (C200HW-NC213/NC413)	XW2B-40J6-2B
		CJ1M-CPU21/CPU22/CPU23 (1 axis)	XW2B-20J6-8A
		CJ1M-CPU21/CPU22/CPU23 (2 axes)	XW2B-40J6-9A
		FQM1-MMA22 FQM1-MMP22	XW2B-80J7-12A
		CQM1H-PLB21	XW2B-20J6-3B
⑦	Servo Relay Unit Cables for Servo Drives	NC Unit (XW2B-20J6-1B/XW2B-40J6-2B) CQM1H-PLB21 (XW2B-20J6-3B)	XW2Z-□□□J-B25 The empty boxes in the model number are for the cable length. The cable can be 1 or 2 m long.
		CJ1M-CPU21/-CPU22/-CPU23 (XW2B-20J6-8A and XW2B-40J6-9A)	XW2Z-□□□J-B31
		FQM1-MMA22 (XW2B-80J7-12A)	XW2Z-□□□J-B27 The empty boxes in the model number are for the cable length. The cable can be 1 or 2 m long.
		FQM1-MMP22 (XW2B-80J7-12A)	XW2Z-□□□J-B26 The empty boxes in the model number are for the cable length. The cable can be 1 or 2 m long.
⑧	Servo Relay Unit Cables for Position Control Units	CJ1W-NC133	XW2Z-□□□J-A18 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		CJ1W-NC233/NC433	XW2Z-□□□J-A19 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		CS1W-NC133	XW2Z-□□□J-A10 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		CS1W-NC233/NC433	XW2Z-□□□J-A11 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		CJ1W-NC113	XW2Z-□□□J-A14 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		CJ1W-NC213/NC413	XW2Z-□□□J-A15 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		CS1W-NC113 C200HW-NC113	XW2Z-□□□J-A6 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		CS1W-NC213/NC413 C200HW-NC213/NC413	XW2Z-□□□J-A7 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		CJ1M-CPU21/CPU22/CPU23	XW2Z-□□□J-A33 The empty boxes in the model number are for the cable length. The cable can be 0.5, 1, or 2 m long.
		FQM1-MMA22 FQM1-MMP22 (General-purpose I/O)	XW2Z-□□□J-A28 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
		FQM1-MMA22 (Special I/O)	XW2Z-□□□J-A31 The empty boxes in the model number are for the cable length. The cable can be 0.5, 1, or 2 m long.
		FQM1-MMP22 (Special I/O)	XW2Z-□□□J-A30 The empty boxes in the model number are for the cable length. The cable can be 0.5, 1, or 2 m long.
		CQM1H-PLB21	XW2Z-□□□J-A3 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
⑨	General-purpose Control Cables	Cables for General-purpose Controllers	R88A-CPG□□□S The empty boxes in the model number are for the cable length. The cable can be 1 or 2 m long.
⑩	Connector Terminal Block Cables	Cables for General-purpose Controllers	XW2Z-□□□J-B24 The empty boxes in the model number are for the cable length. The cable can be 1 or 2 m long.
	Connector-Terminal Block Conversion Units	Conversion Unit for General-purpose Controllers (M3 screws)	XW2B-50G4
		Conversion Unit for General-purpose Controllers (M3.5 screws)	XW2B-50G5
		Conversion Unit for General-purpose Controllers (M3 screws)	XW2D-50G6


● Communications Connector (for CN3)

Symbol	Name	Contents	Length (m)	Model
⑪	RS485 Communications Cables	—	—	R88A-CCG□□□P4 The empty boxes in the model number are for the cable length. The cable can be 0.5 or 1 m long.
⑫	Parameter Unit	—	1.5 m	R88A-PR02G
⑬	Personal Computer Monitor Cable	for Windows RS232 Communications	2 m	R88A-CCG002P2

● Control Cables










Symbol	Name	Connected to	Model
—	Servomotor Connector for Encoder Cable, absolute Encoder	for motor	R88A-CNG01R
—	Servomotor Connector for Encoder Cable, Incremental Encoder	for motor	R88A-CNG02R
—	Control I/O Connector (CN1)	for drive	R88A-CNU11C
—	Encoder Connector (CN2)	—	R88A-CNW01R
—	Power Cable Connector (750 W max.)	—	R88A-CNG01A
—	Brake Cable Connector (750 W max.)	—	R88A-CNG01B

Cable Combinations (For R88D-GN□-ML2)

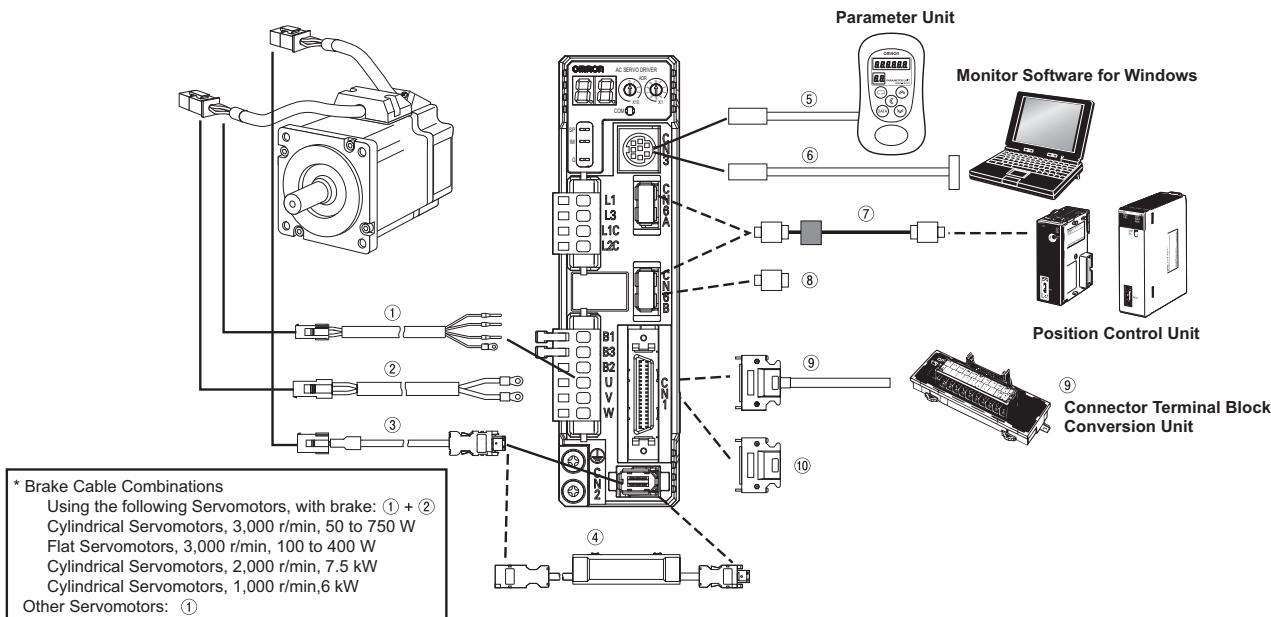

● Power Supply Cables (for CNB) (SR Connection Cables)

Symbol	Name	Connected to	Model	Description
①	Standard Servomotor Power Cables for Servomotors without Brakes	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W Flat Servomotors, 3,000 r/min, 100 to 400 W	R88A-CAGA□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Connector: 172159-1 (Tyco Electronics AMP KK) Connector pins: 170362-1 (Tyco Electronics AMP KK) 170366-1 (Tyco Electronics AMP KK)
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W	R88A-CAGB□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B20-4S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 2 kW Cylindrical Servomotors, 2,000 r/min, 2 kW	R88A-CAGC□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B20-4S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 3 to 5 kW Cylindrical Servomotors, 2,000 r/min, 3 to 5 kW Cylindrical Servomotors, 1,000 r/min, 2 to 4.5 kW	R88A-CAGD□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B22-22S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 1,500 r/min, 7.5 kW Cylindrical Servomotors, 1,000 r/min, 6 kW	R88A-CAGE□□□S The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: NMS3106B32-17S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: NMS3057-20A (Japan Aviation Electronics Industry, Ltd.)

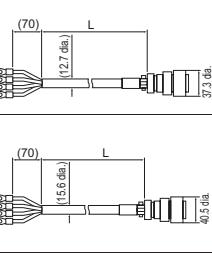Symbol	Name	Connected to	Model	Description
①	Standard Servomotor Power Cables for Servomotors with Brakes	Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W	R88A-CAGB□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Straight plug: N/M3106B20-18S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 2 kW Cylindrical Servomotors, 2,000 r/min, 2 kW	R88A-CAGC□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Straight plug: N/M3106B20-18S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 3 to 5 kW Cylindrical Servomotors, 2,000 r/min, 3 to 5 kW Cylindrical Servomotors, 1,000 r/min, 2 to 4.5 kW	R88A-CAGD□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Straight plug: N/M3106B24-11S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-16A (Japan Aviation Electronics Industry, Ltd.)
	Robot Servomotor Power Cables for Servomotors without Brakes	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W Flat Servomotors, 3,000 r/min, 100 to 400 W	R88A-CAGA□□□SR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Connector: 172159-1 (Tyco Electronics AMP KK) Connector pins: 170362-1 (Tyco Electronics AMP KK) 170366-1 (Tyco Electronics AMP KK)
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W	R88A-CAGB□□□SR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Straight plug: N/M3106B20-4S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 3 to 5 kW Cylindrical Servomotors, 2,000 r/min, 3 to 5 kW Cylindrical Servomotors, 1,000 r/min, 2 to 4.5 kW	R88A-CAGD□□□SR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Straight plug: N/M3106B22-22S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
	Robot Servomotor Power Cables for Servomotors with Brakes	Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W	R88A-CAGB□□□BR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Straight plug: N/M3106B20-18S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 2 kW Cylindrical Servomotors, 2,000 r/min, 2 kW	R88A-CAGC□□□BR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Straight plug: N/M3106B20-18S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-12A (Japan Aviation Electronics Industry, Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 3 to 5 kW Cylindrical Servomotors, 2,000 r/min, 3 to 5 kW Cylindrical Servomotors, 1,000 r/min, 2 to 4.5 kW	R88A-CAGD□□□BR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	 [Servomotor Connector] Straight plug: N/M3106B24-11S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/M3057-16A (Japan Aviation Electronics Industry, Ltd.)


● Brake Cables

Symbol	Name	Connected to	Model	Description
(2)	Standard Brake Cables	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W Flat Servomotors, 3,000 r/min, 100 to 400 W	R88A-CAGA□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Connector: 172157-1 (Tyco Electronics AMP KK) Connector pins: 170362-1 (Tyco Electronics AMP KK) 170366-1 (Tyco Electronics AMP KK)
		Cylindrical Servomotors, 1,500 r/min, 7.5 kW Cylindrical Servomotors, 1,000 r/min, 6 kW	R88A-CAGE□□□B The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Straight plug: N/MS3106B14-2S (Japan Aviation Electronics Industry, Ltd.) Cable clamp: N/MS3057-6A (Japan Aviation Electronics Industry, Ltd.)
	Robot Brake Cables	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W Flat Servomotors, 3,000 r/min, 100 to 400 W	R88A-CAGA□□□BR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servomotor Connector] Connector: 172157-1 (Tyco Electronics AMP KK) Connector pins: 170362-1 (Tyco Electronics AMP KK) 170366-1 (Tyco Electronics AMP KK)

● Encoder Cables (for CN2)

Symbol	Name	Connected to	Model	Description
(3)	Standard Encoder Cables with Connectors	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W, absolute encoder Flat Servomotors, 3,000 r/min, 100 to 400 W, absolute encoder	R88A-CRGA□□□C The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: 3 to 20 m: Crimped I/O connector: (Molex Japan Co., Ltd.) 30 to 50 m: 55100-0670 (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 50 to 750 W, incremental encoder Flat Servomotors, 3,000 r/min, 100 to 400 W, incremental encoder	R88A-CRGB□□□C The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: 3 to 20 m: Crimped I/O connector: (Molex Japan Co., Ltd.) 30 to 50 m: 55100-0670 (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 5 kW Cylindrical Servomotors, 1,500 r/min, 7.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W to 6 kW	R88A-CRG□□□N The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: 3 to 20 m: Crimped I/O connector: (Molex Japan Co., Ltd.) 30 to 50 m: 55100-0670 (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
	Robot Encoder Cables with Connectors	Cylindrical Servomotors, 3,000 r/min, 50 to 750 W, absolute encoder Flat Servomotors, 3,000 r/min, 100 to 400 W, absolute encoder	R88A-CRGA□□□CR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: Crimped I/O connector: (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 50 to 750 W, incremental encoder Flat Servomotors, 3,000 r/min, 100 to 400 W, incremental encoder	R88A-CRGB□□□CR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: Crimped I/O connector: (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)
		Cylindrical Servomotors, 3,000 r/min, 1 to 1.5 kW Cylindrical Servomotors, 2,000 r/min, 1 to 5 kW Cylindrical Servomotors, 1,500 r/min, 7.5 kW Cylindrical Servomotors, 1,000 r/min, 900 W to 6 kW	R88A-CRG□□□NR The empty boxes in the model number are for the cable length. The cable can be 3, 5, 10, 15, 20, 30, 40, or 50 m long.	[Servo Drive Connector] Connector: Crimped I/O connector: (Molex Japan Co., Ltd.) Connector pins: 50639-8028 (Molex Japan Co., Ltd.)


● Absolute Encoder Backup Battery and Absolute Encoder Battery Cable

Symbol	Name	Contents	Length (m)	Model	Description
(4)	Absolute Encoder Battery Cable	Battery not included.	0.3 m	R88A-CRGD0R3C	
		One R88A-BAT01G Battery included.	0.3 m	R88A-CRGD0R3C-BS	
	Absolute Encoder Backup Battery	—	—	R88A-BAT01G	—


● RS-232 Communications Connector (for CN3)

Symbol	Name	Contents	Length (m)	Model
⑤	Parameter Unit	—	1.5 m	R88A-PR02G
⑥	Personal Computer Monitor Cable for Windows RS232 Communications	2 m		R88A-CCG002P2

● MECHATROLINK-II Cable (for CN6)

Symbol	Name	Length (m)	OMRON model Number	Yasukawa model Number	Description
⑦	MECHATROLINK-II Cable	0.5 m	FNY-W6003-A5	JEPMC-W6003-A5	 <p>With ferrite core</p>
		1.0 m	FNY-W6003-01	JEPMC-W6003-01	
		3.0 m	FNY-W6003-03	JEPMC-W6003-03	
		5.0 m	FNY-W6003-05	JEPMC-W6003-05	
		10 m	FNY-W6003-10	JEPMC-W6003-10	
		20 m	FNY-W6003-20	JEPMC-W6003-20	
		30 m	FNY-W6003-30	JEPMC-W6003-30	
⑧	MECHATROLINK-II Termination resistor	—	FNY-W6022	JEPMC-W6022	—

● Control Cables (for CN1)

Symbol	Name	Connected to	Model	Description
⑨	Connector Terminal Block Cables	—	XW2Z-□□□J-B33 The empty boxes in the model number are for the cable length. The cable can be 1, or 2 m long.	
	Connector Terminal Block Conversion Unit	M3 screw type	XW2B-20G4	
		M3.5 screw type	XW2B-20G5	
		M3 screw type	XW2D-20G6	—

● Control Cables

Symbol	Name	Connected to	Model
—	Servomotor Connector for Encoder Cable, absolute Encoder	for motor	R88A-CNG01R
—	Servomotor Connector for Encoder Cable, Incremental Encoder	for motor	R88A-CNG02R
⑩	Control I/O Connector (CN1)	for drive	R88A-CNU01C
—	Encoder Connector (CN2)	—	R88A-CNW01R
—	Power Cable Connector (750 W max.)	—	R88A-CNG01A
—	Brake Cable Connector (750 W max.)	—	R88A-CNG01B

Servo Drive Specifications (R88D-G□/R88D-GN□-ML2)

● General Specifications

Item			Specifications
Ambient operating temperature and operating humidity			0 to 55°C, 90% RH max. (with no condensation)
Ambient storage temperature and storage humidity			-20 to 65°C, 90% RH max. (with no condensation)
Storage and operating atmosphere			No corrosive gasses
Vibration resistance			Smaller of either 10 to 60 Hz with double amplitude of 0.1 mm or acceleration of 5.88 m/s ² max. in X, Y, and Z directions.
Impact resistance			Acceleration of 19.6 m/s ² max. 2 times each in X, Y, and Z directions
Insulation resistance			Between power supply/power line terminals and frame ground: 0.5 MΩ min. (at 500 VDC)
Dielectric strength			Between power supply/power line terminals and frame ground: 1,500 VAC for 1 min at 50/60 Hz Between each control signal and frame ground: 500 VAC for 1 min
Protective structure			Built into panel (IP10).
International standards	EC Directives	EMC Directive	EN 55011 class A group 1
		Low voltage Directive	EN 61000-6-2, IEC 61000-4-2/-3/-4/-5/-6/-11
	UL standards		UL 508C
	CSA standards		CSA C22.2 No.14

Note: 1. The above items reflect individual evaluation testing. The results may differ under compound conditions.

Note: 2. Never perform withstand-voltage or other megameter tests on the Servo Drive. Doing so may damage the internal elements.

Note: 3. Depending on the operating conditions, some Servo Drive parts will require maintenance.

Note: 4. The service life of the Servo Drive is 28,000 hours at an average ambient temperature of 55°C at 100% of the rated torque.

● Characteristics

Servo Drives with Single-phase 100-VAC Input Power

Item			R88D-GT45L	R88D-GT01L	R88D-GT02L	R88D-GT04L				
			R88D-GNA5L-ML2	R88D-GN01L-ML2	R88D-GN02L-ML2	R88D-GN04L-ML2				
Continuous output current (rms)			1.3 A	1.8 A	2.4 A	4.9 A				
Momentary maximum output current (rms)			3.9 A	5.4 A	7.2 A	14.7 A				
Input power supply	Main circuit	Power supply capacity	0.4 KVA	0.4 KVA	0.5 KVA	0.9 KVA				
		Power supply voltage	Single-phase 100 to 115 VAC (85 to 127 V), 50/60 Hz							
	Control circuit	Rated current	1.4 A	2.2 A	3.7 A	6.6 A				
		Power supply voltage	Single-phase 100 to 115 VAC (85 to 127 V), 50/60 Hz							
Heat generated	Main circuit	Rated current	0.09 A	0.09 A	0.09 A	0.09 A				
			10.1 W	14.4 W	18.4 W	41.4 W				
	Control circuit		4.4 W	4.4 W	4.4 W	4.4 W				
				All-digital servo						
Control method			IGBT-driven PWM method							
Inverter method										
PWM frequency			12.0 kHz		6.0 kHz					
Weight			Approx. 0.8 kg	Approx. 0.8 kg	Approx. 1.1 kg	Approx. 1.5 kg				
Maximum applicable motor capacity			50 W	100 W	200 W	400 W				
Applicable Servomotors	3,000-r/min Servomotors	INC	G05030H	G10030L	G20030L	G40030L				
		ABS	G05030T	G10030S	G20030S	G40030S				
	3,000-r/min Flat Servomotors	INC	—	GP10030L	GP20030L	GP40030L				
		ABS	—	GP10030S	GP20030S	GP40030S				
	2,000-r/min Servomotors	ABS	—	—	—	—				
Performance	1,000-r/min Servomotors	ABS	—	—	—	—				
	Speed control range		1: 5000							
	Speed variability: Load characteristic		0.01% or less at 0% to 100% (at rated speed)							
	Speed variability: Voltage characteristic		0% at ±10% of rated voltage (at rated speed)							
	Speed variability: Temperature characteristic		±0.1% or less at 0 to 50°C (at rated speed)							
Torque control reproducibility			±3% (at 20% to 100% of rated torque)							

Servo Drives with Single-phase 200-VAC Input Power

Item			R88D-GT01H	R88D-GT02H	R88D-GT04H	R88D-GT08H	R88D-GT10H	R88D-GT15H	
			R88D-GN01H-ML2	R88D-GN02H-ML2	R88D-GN04H-ML2	R88D-GN08H-ML2	R88D-GN10H-ML2	R88D-GN15H-ML2	
Continuous output current (rms)			1.16 A	1.6 A	2.7 A	4.0 A	5.9 A	9.8 A	
Momentary maximum output current (rms)			3.5 A	5.3 A	7.1 A	14.1 A	21.2 A	28.3 A	
Input power supply	Main circuit	Power supply capacity	0.5 kVA	0.5 kVA	0.9 kVA	1.3 kVA	1.8 kVA	2.3 kVA	
		Power supply voltage	Single-phase 200 to 240 VAC (170 to 264 V), 50/60 Hz			Single-phase or three-phase 200 to 240 VAC (170 to 264 V), 50/60 Hz			
	Control circuit	Rated current	1.3 A	2.0 A	3.7 A	5.0/3.3 ^{**} A	7.5/4.1 ^{**} A	11/8.0 ^{**} A	
		Power supply voltage	Single-phase 200 to 240 VAC (170 to 264 V), 50/60 Hz						
Heat generated	Main circuit	Rated current	0.05 A	0.05 A	0.05 A	0.05 A	0.07 A	0.07 A	
		Control circuit	4.5 W	4.5 W	4.5 W	4.3 W	6.1 W	6.1 W	
PWM frequency			12.0 kHz			6.0 kHz			
Weight			Approx. 0.8 kg	Approx. 0.8 kg	Approx. 1.1 kg	Approx. 1.5 kg	Approx. 1.7 kg	Approx. 1.7 kg	
Maximum applicable motor capacity			100 W	200 W	400 W	750 W	1 kW	1.5 kW	
Applicable Servomotors	3,000-r/min Servomotors	INC	G05030H G10030H	G20030H	G40030H	G75030H	—	G1K030H G1K530H	
		ABS	G05030T G10030T	G20030T	G40030T	G75030T	—	G1K030T G1K530T	
	3,000-r/min Flat Servomotors	INC	GP10030H	GP20030H	GP40030H	—	—	—	
		ABS	GP10030T	GP20030T	GP40030T	—	—	—	
	2,000-r/min Servomotors	INC	—	—	—	—	G1K020H	G1K520H	
		ABS	—	—	—	—	G1K020T	G1K520T	
	1,000-r/min Servomotors	ABS	—	—	—	—	—	G90010T	
Control method			All-digital servo						
Inverter method			IGBT-driven PWM method						
Performance	Speed control range		1:5000						
	Speed variability: Load characteristic		0.01% or less at 0% to 100% (at rated speed)						
	Speed variability: Voltage characteristic		0% at $\pm 10\%$ of rated voltage (at rated speed)						
	Speed variability: Temperature characteristic		$\pm 0.1\%$ or less at 0 to 50°C (at rated speed)						
	Torque control reproducibility		$\pm 3\%$ (at 20% to 100% of rated torque)						

*1. The left value is for single-phase input power and the right value is for three-phase input power.

Servo Drives with Three-phase 200-VAC Input Power

Item			R88D-GT20H	R88D-GT30H	R88D-GT50H	R88D-GT75H	
			R88D-GN20H-ML2	R88D-GN30H-ML2	R88D-GN40H-ML2	R88D-GN75H-ML2	
Continuous output current (rms)			14.3 A	17.4 A	31.0 A	45.4 A	
Momentary maximum output current (rms)			45.3 A	63.6 A	84.8 A	170.0 A	
Input power supply	Main circuit	Power supply capacity	3.3 kVA	4.5 kVA	7.5 kVA	11 kVA	
		Power supply voltage	Three-phase 200 to 230 VAC (170 to 253 V), 50/60 Hz				
		Rated current	10.2 A	15.2 A	23.7 A	35.0 A	
Heat generated	Control circuit	Power supply voltage	Single-phase 200 to 230 VAC (170 to 253 V), 50/60 Hz				
		Rated current	0.1 A	0.12 A	0.12 A	0.14 A	
Heat generated	Main circuit	112.3 W	219.6 W	391.7 W	376.2 W		
	Control circuit	10.7 W	13.3 W	13.3 W	13.8 W		
PWM frequency			6.0 kHz				
Weight			Approx. 3.2 kg	Approx. 6.0 kg	Approx. 6.0 kg	Approx. 16.4 kg	
Maximum applicable motor capacity			2 kW	3 kW	5 kW	7.5 kW	
Applicable Servomotors	3,000-r/min Servomotors	INC	G2K030H	G3K030H	G4K030H G5K030H	—	
		ABS	G2K030T	G3K030T	G4K030T G5K030T	—	
	3,000-r/min Flat Servomotors	INC	—	—	—	—	
		ABS	—	—	—	—	
	2,000-r/min Servomotors	INC	G2K020H	G3K020H	G4K020H G5K020H	G7K515H	
		ABS	G2K020T	G3K020T	G4K020T G5K020T	G7K515T	
	1,000-r/min Servomotors	INC	—	G2K010H	G3K010H G4K510H	G6K010H	
		ABS	—	G2K010T	G3K010T G4K510T	G6K010T	
Control method			All-digital servo				
Inverter method			IGBT-driven PWM method				
Performance	Speed control range		1:5000				
	Speed variability: Load characteristic		0.01% or less at 0% to 100% (at rated speed)				
	Speed variability: Voltage characteristic		0% at $\pm 10\%$ of rated voltage (at rated speed)				
	Speed variability: Temperature characteristic		$\pm 0.1\%$ or less at 0 to 50°C (at rated speed)				
	Torque control reproducibility		$\pm 3\%$ (at 20% to 100% of rated torque)				

Servomotor Specifications (R88M-G)

● General Specifications

Item	3,000-r/min Servomotors		3,000-r/min Flat Servomotors	1,000-r/min Servomotors 2,000-r/min Servomotors			
	50 to 750 W	1 to 5 kW		900 W to 5 kW	6 to 7.5 kW		
Ambient operating temperature and humidity	0 to 40°C, 85% RH max. (with no condensation)						
Ambient storage temperature and humidity	-20 to 65°C, 85% RH max. (with no condensation)	-20 to 80°C, 85% RH max. (with no condensation)					
Storage and operating atmosphere	No corrosive gases						
Vibration resistance *1	10 to 2,500 Hz and acceleration of 49 m/s ² max. in the X, Y, and Z directions	10 to 2,500 Hz and acceleration of 24.5 m/s ² max. in the X, Y, and Z directions	10 to 2,500 Hz and acceleration of 49 m/s ² max. in the X, Y, and Z directions	10 to 2,500 Hz and acceleration of 24.5 m/s ² max. in the X, Y, and Z directions			
Impact resistance	Acceleration of 98 m/s ² max. 3 times each in the X, Y, and Z directions	Acceleration of 98 m/s ² max. 3 times each in the X, Y, and Z directions	Acceleration of 98 m/s ² max. 3 times each in the X, Y, and Z directions	Acceleration of 98 m/s ² max. 2 times vertically			
Insulation resistance	20 MΩ min. at 500 VDC between the power terminals and FG terminal						
Dielectric strength	1,500 VAC (50 or 60 Hz) for 1 minute between the power terminals and FG terminal						
Operating position	All directions						
Insulation grade	Type B	Type F	Type B	Type F			
Structure	Totally enclosed, self-cooling						
Protective structure	IP65 (excluding the output shaft rotating section and lead wire ends)						
Vibration grade	V-15						
Mounting method	Flange-mounting						
International standards	EC Directives	EMC Directive	EN 55011 Class A Group 1				
			EN 61000-6-2, IEC 61000-4-2/-3/-4/-5/-6/-11				
	Low voltage Directive		IEC 60034-1/-5				
UL standards	UL 1004				UL: pending		
CSA standards	CSA 22.2 No.100						

*1. The amplitude may be amplified by mechanical resonance. Do not exceed 80% of the specified value for extended periods of time.

Note: 1. Do not use the cable when it is laying in oil or water.

Note: 2. Do not expose the cable outlet or connections to stress due to bending or the weight of the cable itself.

Servomotor Specifications (R88M-G)

● Characteristics

3,000-r/min Cylindrical Servomotors

100-VAC Input Power


Item		Model (R88M-)		G05030H	G10030L	G20030L	G40030L
		Unit		G05030T	G10030S	G20030S	G40030S
Rated output *1	W			50	100	200	400
Rated torque *1	N·m			0.16	0.32	0.64	1.3
Rated rotation speed	r/min				3000		
Max. momentary rotation speed	r/min				5000		
Max. momentary torque *1	N·m			0.45	0.93	1.78	3.6
Rated current *1	A (rms)			1.1	1.7	2.5	4.6
Max. momentary current *1	A (rms)			3.4	5.1	7.6	13.9
Rotor inertia	kg·m ² (GD ² /4)			2.5 × 10 ⁻⁶	5.1 × 10 ⁻⁶	1.4 × 10 ⁻⁵	2.6 × 10 ⁻⁵
Applicable load inertia	—				30 times the rotor inertia max. *2		
Torque constant *1	N·m/A			0.14	0.19	0.26	0.28
Power rate *1	kW/s			10.4	20.1	30.3	62.5
Mechanical time constant	ms			1.56	1.11	0.72	0.55
Electrical time constant	ms			0.7	0.8	2.5	2.9
Allowable radial load *3	N			68	68	245	245
Allowable thrust load *3	N			58	58	98	98
Weight	Without brake	kg		Approx. 0.3	Approx. 0.5	Approx. 0.8	Approx. 1.2
	With brake	kg		Approx. 0.5	Approx. 0.7	Approx. 1.3	Approx. 1.7
Radiation shield dimensions (material)				100 × 80 × t10 (Al)		130 × 120 × t12 (Al)	
Applicable Servo Drives (R88D-)				GTA5L	GT01L	GT02L	GT04L
Brake specifications	Brake inertia	kg·m ² (GD ² /4)		2 × 10 ⁻⁷	2 × 10 ⁻⁷	1.8 × 10 ⁻⁶	1.8 × 10 ⁻⁶
	Excitation voltage *4	V			24 VDC ±5%		
	Power consumption (at 20°C)	W		7	7	9	9
	Current consumption (at 20°C)	A		0.3	0.3	0.36	0.36
	Static friction torque	N·m		0.29 min.	0.29 min.	1.27 min.	1.27 min.
	Attraction time *5	ms		35 max.	35 max.	50 max.	50 max.
	Release time *5	ms		20 max.	20 max.	15 max.	15 max.
	Backlash				1° (reference value)		
	Allowable work per braking	J		39.2	39.2	137	137
	Allowable total work	J		4.9 × 10 ³	4.9 × 10 ³	44.1 × 10 ³	44.1 × 10 ³
	Allowable angular acceleration	rad/s ²			30,000 max. (Speed of 2,800 r/min or more must not be changed in less than 10 ms)		
	Brake life	—			10,000,000 operations min.		
	Rating	—			Continuous		
	Insulation grade	—			Type B		

*1. These are the values when the Servomotor is combined with a Servo Drive at room temperature (20°C, 65%). The maximum momentary torque shown above indicates the standard value.

*2. Applicable Load Inertia:

- The operable load inertia ratio (load inertia/rotor inertia) depends on the mechanical configuration and its rigidity. For a machine with high rigidity, operation is possible even with high load inertia. Select an appropriate motor and confirm that operation is possible.
- If the dynamic brake is activated frequently with high load inertia, the dynamic brake resistor may burn. Do not repeatedly turn the Servomotor ON and OFF while the dynamic brake is enabled.

*3. The allowable radial and thrust loads are the values determined for a service life of 20,000 hours at normal operating temperatures. The allowable radial loads are applied as shown in the following diagram.

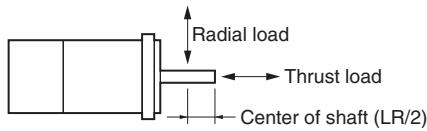

*4. This is an OFF brake. (It is reset when excitation voltage is applied).

*5. The operation time is the value (reference value) measured with a surge suppressor (CR50500 manufactured by Okaya Electric Industries Co., Ltd.).


Torque and Rotation Speed Characteristics

3,000-r/min Cylindrical Servomotors


- 3,000-r/min Servomotors with 100-VAC Power Input

The following graphs show the characteristics with a 3-m standard cable and a 100-VAC input.


R88M-G05030H/T (50 W)

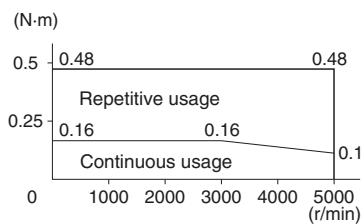


R88M-G10030L/S (100 W)

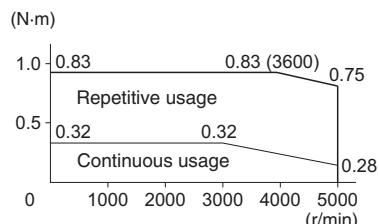

R88M-G20030L/S (200 W)

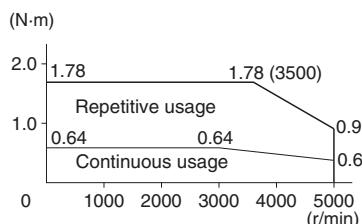

R88M-G40030L/S (400 W)

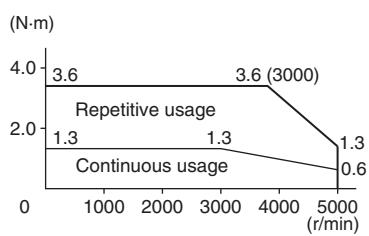

Servomotor Specifications (R88M-G)

● Characteristics

3,000-r/min Cylindrical Servomotors

200-VAC Input Power

Model (R88M-G)		G05030H	G10030H	G20030H	G40030H	G75030H	G1K030H	G1K530H	G2K030H	G3K030H	G4K030H	G5K030H					
Item	Unit	G05030T	G10030T	G20030T	G40030T	G75030T	G1K030T	G1K530T	G2K030T	G3K030T	G4K030T	G5K030T					
Rated output t [*] 1	W	50	100	200	400	750	1000	1500	2000	3000	4000	5000					
Rated torque *1	N·m	0.16	0.32	0.64	1.3	2.4	3.18	4.77	6.36	9.54	12.6	15.8					
Rated rotation speed	r/min						3000										
Max. momentary rotation speed	r/min		5000		4500		5000		4500								
Max. momentary torque *1	N·m	0.45	0.90	1.78	3.67	7.05	9.1	12.8	18.4	27.0	36.3	45.1					
Rated current *1	A (rms)	1.1	1.1	1.6	2.6	4	7.2	9.4	13	18.6	24.7	28.5					
Max. momentary current *1	A (rms)	3.4	3.4	4.9	7.9	12.1	21.4	28.5	40	57.1	75	85.7					
Rotor inertia	kg·m ² (GD ² /4)	2.5 × 10 ⁻⁶	5.1 × 10 ⁻⁶	1.4 × 10 ⁻⁵	2.6 × 10 ⁻⁵	8.7 × 10 ⁻⁵	1.69 × 10 ⁻⁴	2.59 × 10 ⁻⁴	3.46 × 10 ⁻⁴	6.77 × 10 ⁻⁴	1.27 × 10 ⁻³	1.78 × 10 ⁻³					
Applicable load inertia	—		30 times the rotor inertia max. *2		20 times the rotor inertia max. *2		15 times the rotor inertia max. *2										
Torque constant *1	N·m/A	0.14	0.19	0.41	0.51	0.64	0.44	0.51	0.48	0.51	0.51	0.57					
Power rate *1	kW/s	10.4	20.1	30.3	62.5	66	60	88	117	134	125	140					
Mechanical time constant	ms	1.56	1.1	0.71	0.52	0.45	0.78	0.54	0.53	0.46	0.51	0.46					
Electrical time constant	ms	0.7	0.79	2.6	3	4.6	6.7	10	10.8	20	20	20					
Allowable radial load *3	N	68	68	245	245	392	392	490	490	490	784	784					
Allowable thrust load *3	N	58	58	98	98	147	147	196	196	196	343	343					
Weight	Without brake	kg	Approx. 0.3	Approx. 0.5	Approx. 0.8	Approx. 1.2	Approx. 2.3	Approx. 4.5	Approx. 5.1	Approx. 6.5	Approx. 9.3	Approx. 12.9					
	With brake	kg	Approx. 0.5	Approx. 0.7	Approx. 1.3	Approx. 1.7	Approx. 3.1	Approx. 5.1	Approx. 6.5	Approx. 7.9	Approx. 11	Approx. 14.8					
Radiation shield dimensions (material)			100 × 80 × t10 (Al)	130 × 120 × t12 (Al)	170 × 160 × t12 (Al)	320 × 300 × t30 (Al)	320 × 300 × t20 (Al)	380 × 350 × t30 (Al)									
Applicable Servo Drives (R88D-)			G□01H	G□01H	G□02H	G□04H	G□08H	G□15H	G□15H	G□20H	G□30H	G□50H	G□50H				
Brake specifications	Brake inertia	kg·m ² (GD ² /4)	2 × 10 ⁻⁷	2 × 10 ⁻⁷	1.8 × 10 ⁻⁶	1.8 × 10 ⁻⁶	7.5 × 10 ⁻⁶	2.5 × 10 ⁻⁵	3.3 × 10 ⁻⁵	3.3 × 10 ⁻⁵	1.35 × 10 ⁻⁴	1.35 × 10 ⁻⁴					
	Excitation voltage *4	V	24 VDC ±5%					24 VDC ±10%									
	Power consumption (at 20°C)	W	7	7	9	9	10	18	19	19	19	22	22				
	Current consumption (at 20°C)	A	0.3	0.3	0.36	0.36	0.42	0.74	0.81	0.81	0.81	0.9	0.9				
	Static friction torque	N·m	0.29 min.	0.29 min.	1.27 min.	1.27 min.	2.45 min.	4.9 min.	7.8 min.	7.8 min.	11.8 min.	16.1 min.	16.1 min.				
	Attraction time *5	ms	35 max.	35 max.	50 max.	50 max.	70 max.	50 max.	50 max.	50 max.	80 max.	110 max.	110 max.				
	Release time *5	ms	20 max.	20 max.	15 max.	15 max.	20 max.	15 max.	15 max.	15 max.	15 max.	50 max.	50 max.				
	Backlash		1° (reference value)														
	Allowable work per braking	J	39.2	39.2	137	137	196	392	392	392	1470	1470					
	Allowable total work	J	4.9 × 10 ³	4.9 × 10 ³	44.1 × 10 ³	44.1 × 10 ³	147 × 10 ³	2.0 × 10 ⁵	4.9 × 10 ⁵	4.9 × 10 ⁵	2.2 × 10 ⁶	2.2 × 10 ⁶					
	Allowable angular acceleration	rad/s ²	30,000 max. (Speed of 2,800 r/min or more must not be changed in less than 10 ms)					10,000 max. (Speed of 900 r/min or more must not be changed in less than 10 ms)									
	Brake life	—	10,000,000 operations min.														
	Rating	—	Continuous														
	Insulation grade	—	Type B					Type F									

*1. These are the values when the Servomotor is combined with a Servo Drive at room temperature (20°C, 65%). The maximum momentary torque shown above indicates the standard value.


*2. Applicable Load Inertia:

- The operable load inertia ratio (load inertia/rotor inertia) depends on the mechanical configuration and its rigidity. For a machine with high rigidity, operation is possible even with high load inertia. Select an appropriate motor and confirm that operation is possible.
- If the dynamic brake is activated frequently with high load inertia, the dynamic brake resistor may burn. Do not repeatedly turn the Servomotor ON and OFF while the dynamic brake is enabled.

*3. The allowable radial and thrust loads are the values determined for a service life of 20,000 hours at normal operating temperatures. The allowable radial loads are applied as shown in the following diagram.

*4. This is an OFF brake. (It is reset when excitation voltage is applied).

*5. The operation time is the value (reference value) measured with a surge suppressor (CR50500 manufactured by Okaya Electric Industries Co., Ltd.).

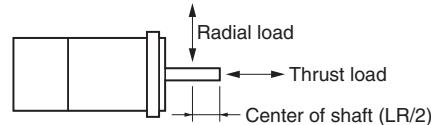


Torque and Rotation Speed Characteristics

3,000-r/min Cylindrical Servomotors


- 3,000-r/min Servomotors with 200-VAC Power Input

The following graphs show the characteristics with a 3-m standard cable and a 200-VAC input.


R88M-G05030H/T (50 W)

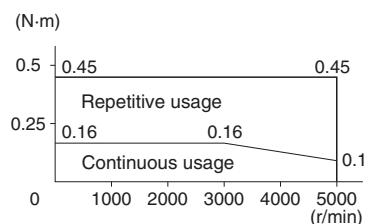


R88M-G10030H/T (100 W)

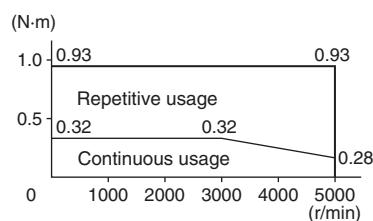


R88M-G20030H/T (200 W)

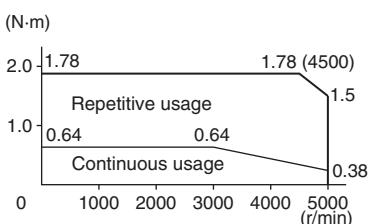


R88M-G40030H/T (400 W)

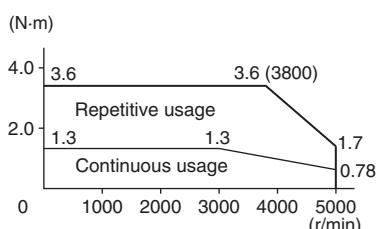


R88M-G75030H/T (750 W)

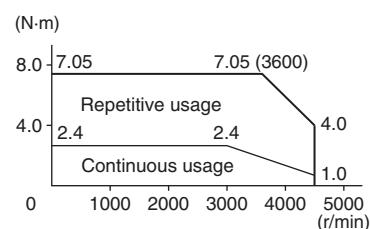


R88M-G1K030H/T (1 kW)

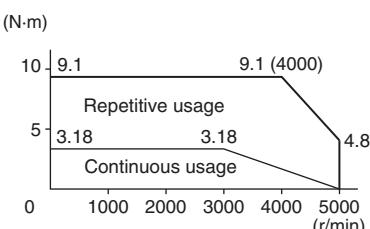


R88M-G1K530H/T (1.5 kW)

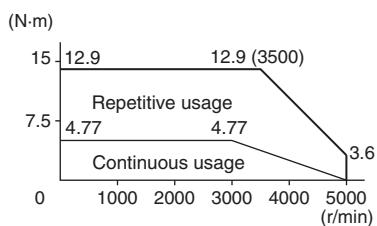


R88M-G2K030H/T (2 kW)

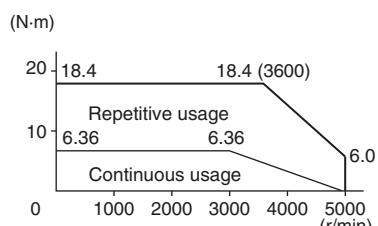


R88M-G3K030H/T (3 kW)

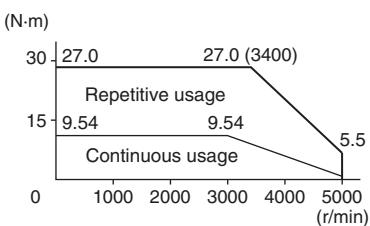

R88M-G4K030H/T (4 kW)

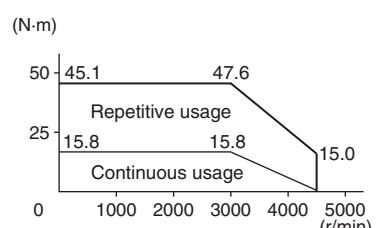

R88M-G5K030H/T (5 kW)

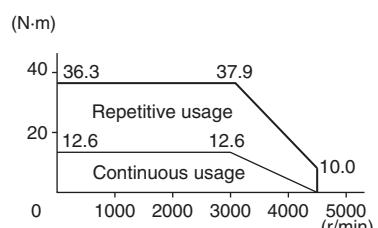

Servomotor Specifications (R88M-GP)

● Characteristics

3,000-r/min Flat Servomotors


Model (R88M-)		100 VAC			200 VAC		
		GP10030L	GP20030L	GP40030L	GP10030H	GP20030H	GP40030H
		GP10030S	GP20030S	GP40030S	GP10030T	GP20030T	GP40030T
Rated output ^{*1}	W	100	200	400	100	200	400
Rated torque ^{*1}	N·m	0.32	0.64	1.3	0.32	0.64	1.3
Rated rotation speed	r/min			3000			
Max. momentary rotation speed	r/min	5000		4500	5000		
Max. momentary torque ^{*1}	N·m	0.84	1.8	3.6	0.86	1.8	3.65
Rated current ^{*1}	A (rms)	1.6	2.5	4.4	1	1.6	2.5
Max. momentary current ^{*1}	A (rms)	4.9	7.5	13.3	3.1	4.9	7.5
Rotor inertia	kg·m ² (GD ² /4)	1.0 × 10 ⁻⁵	3.5 × 10 ⁻⁵	6.5 × 10 ⁻⁵	1.0 × 10 ⁻⁵	3.5 × 10 ⁻⁵	6.4 × 10 ⁻⁵
Applicable load inertia	---			20 times the rotor inertia max. ^{*2}			
Torque constant ^{*1}	N·m/A	0.21	0.27	0.3	0.34	0.42	0.54
Power rate ^{*1}	kW/s	10.2	11.7	26.0	10.2	11.5	25.5
Mechanical time constant	ms	0.87	0.75	0.55	1.05	0.81	0.59
Electrical time constant	ms	3.4	6.7	6.7	2.9	5.6	6.6
Allowable radial load ^{*3}	N	68	245	245	68	245	245
Allowable thrust load ^{*3}	N	58	98	98	58	98	98
Weight	Without brake	kg	Approx. 0.7	Approx. 1.3	Approx. 1.8	Approx. 0.7	Approx. 1.3
	With brake	kg	Approx. 0.9	Approx. 2	Approx. 2.5	Approx. 0.9	Approx. 2
Radiation shield dimensions (material)			130 × 120 × t10 (Al)	170 × 160 × t12 (Al)		130 × 120 × t10 (Al)	170 × 160 × t12 (Al)
Applicable Servo Drives (R88D-)			GT01L	GT02L	GT04L	G□01H	G□02H
Brake specifications	Brake inertia	kg·m ² (GD ² /4)	3 × 10 ⁻⁶	9 × 10 ⁻⁶		3 × 10 ⁻⁶	9 × 10 ⁻⁶
	Excitation voltage ^{*4}	V		24 VDC ±10%			
	Power consumption (at 20°C)	W	7	10	7	10	
	Current consumption (at 20°C)	A	0.29	0.41	0.29	0.41	
	Static friction torque	N·m		0.29 min.	0.29 min.	1.27 min.	
	Attraction time ^{*5}	ms		50 max.	50 max.	60 max.	
	Release time ^{*5}	ms		15 max.			
	Backlash			1° (reference value)			
	Allowable work per braking	J	137	196	137	196	
	Allowable total work	J	44.1 × 10 ³	147 × 10 ³	44.1 × 10 ³	147 × 10 ³	
	Allowable angular acceleration	rad/s ²		10,000 max. (Speed of 900 r/min or more must not be changed in less than 10 ms)			
	Brake life	---		10,000,000 operations min.			
	Rating	---		Continuous		Continuous	
	Insulation grade	---		Type B		Type B	

*1. These are the values when the Servomotor is combined with a Servo Drive at room temperature (20°C, 65%). The maximum momentary torque shown above indicates the standard value.

*2. Applicable Load Inertia:

- The operable load inertia ratio (load inertia/rotor inertia) depends on the mechanical configuration and its rigidity. For a machine with high rigidity, operation is possible even with high load inertia. Select an appropriate motor and confirm that operation is possible.
- If the dynamic brake is activated frequently with high load inertia, the dynamic brake resistor may burn. Do not repeatedly turn the Servomotor ON and OFF while the dynamic brake is enabled.

*3. The allowable radial and thrust loads are the values determined for a service life of 20,000 hours at normal operating temperatures. The allowable radial loads are applied as shown in the following diagram.

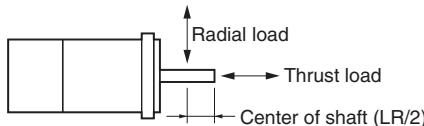

*4. This is an OFF brake. (It is reset when excitation voltage is applied).

*5. The operation time is the value (reference value) measured with a surge suppressor (CR50500 manufactured by Okaya Electric Industries Co., Ltd.).


Torque and Rotation Speed Characteristics

3,000-r/min Flat Servomotors


- 3,000-r/min Servomotors with 100-VAC Power Input

The following graphs show the characteristics with a 3-m standard cable and a 100-VAC input.


R88M-GP10030L/S (100 W)

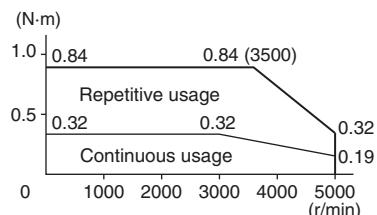

R88M-GP20030L/S (200 W)

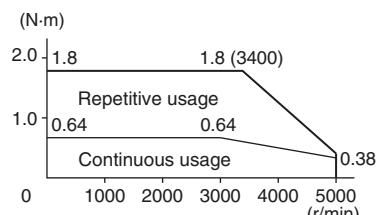


R88M-GP40030L/S (400 W)

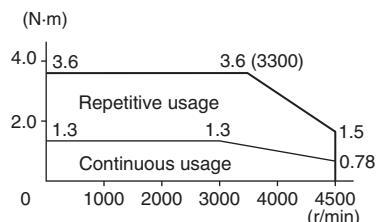


- 3,000-r/min Servomotors with 200-VAC Power Input

The following graphs show the characteristics with a 3-m standard cable and a 200-VAC input.


R88M-GP10030H/T (100 W)

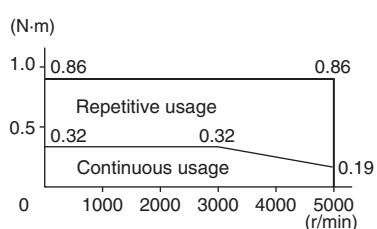

R88M-GP20030H/T (200 W)

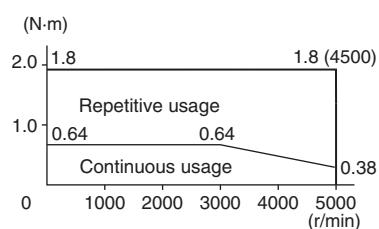

R88M-GP40030H/T (400 W)

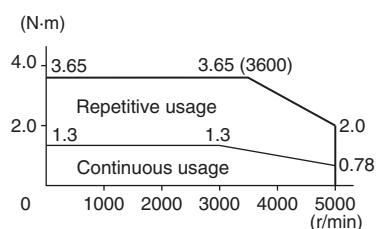

Servomotor Specifications (R88M-G)

● Characteristics

2,000-r/min Cylindrical Servomotors

200-VAC Input Power


Item		Model (R88M- Unit)	G1K020H	G1K520H	G2K020H	G3K020H	G4K020H	G5K020H	G7K515H
			G1K020T	G1K520T	G2K020T	G3K020T	G4K020T	G5K020T	G7K515T
Rated output *1	W	1000	1500	2000	3000	4000	5000	7500	
Rated torque *1	N·m	4.8	7.15	9.54	14.3	18.8	23.8	48	
Rated rotation speed	r/min	2000						1500	
Max. momentary rotation speed	r/min	3000						2000	
Max. momentary torque *1	N·m	13.5	19.6	26.5	41.2	54.9	70.6	111	
Rated current *1	A (rms)	5.6	9.4	12.3	17.8	23.4	28	46.6	
Max. momentary current *1	A (rms)	17.1	28.5	37.1	54.2	71.4	85.7	117.8	
Rotor inertia	kg·m ² (GD ² /4)	6.17 × 10 ⁻⁴	1.12 × 10 ⁻³	1.52 × 10 ⁻³	2.23 × 10 ⁻³	4.25 × 10 ⁻³	6.07 × 10 ⁻³	8.9 × 10 ⁻³	
Applicable load inertia	—	10 times the rotor inertia max. *2							
Torque constant *1	N·m/A	0.88	0.76	0.78	0.81	0.81	0.85	1.03	
Power rate *1	kW/s	37.3	45.8	60	91.6	83.2	93.5	230	
Mechanical time constant	ms	0.7	0.81	0.75	0.72	1	0.9	0.71	
Electrical time constant	ms	18	19	21	20	24	32	34	
Allowable radial load *3	N	490	490	490	784	784	784	1176	
Allowable thrust load *3	N	196	196	196	343	343	343	490	
Weight	Without brake With brake	kg	Approx. 6.8 Approx. 8.7	Approx. 8.5 Approx. 10.1	Approx. 10.6 Approx. 12.5	Approx. 14.6 Approx. 16.5	Approx. 18.8 Approx. 21.3	Approx. 25 Approx. 28.5	Approx. 41 Approx. 45
Radiation shield dimensions (material)			275 × 260 × t15 (Al)			380 × 350 × t30 (Al)	470 × 440 × t30 (Al)		
Applicable Servo Drives (R88D-)			G□10H	G□15H	G□20H	G□30H	G□50H	G□50H	G□75H
Brake specifications	Brake inertia	kg·m ² (GD ² /4)	1.35 × 10 ⁻⁴				4.25 × 10 ⁻⁴	4.7 × 10 ⁻⁴	4.7 × 10 ⁻⁴
	Excitation voltage *4	V	24 VDC ±10%						
	Power consumption (at 20°C)	W	14	19	19	22	26	31	34
	Current consumption (at 20°C)	A	0.59	0.79	0.79	0.9	1.1	1.3	1.4
	Static friction torque	N·m	4.9 min.	13.7 min.	13.7 min.	16.1 min.	21.5 min.	24.5 min.	58.8 min.
	Attraction time *5	ms	80 max.	100 max.	100 max.	110 max.	90 max.	80 max.	150 max.
	Release time *5	ms	70 max.	50 max.	50 max.	50 max.	35 min.	25 min.	50 max.
	Backlash		1° (reference value)						
	Allowable work per braking	J	588	1176	1176	1170	1078	1372	1372
	Allowable total work	J	7.8 × 10 ⁵	1.5 × 10 ⁶	1.5 × 10 ⁶	2.2 × 10 ⁶	2.5 × 10 ⁶	2.9 × 10 ⁶	2.9 × 10 ⁶
	Allowable angular acceleration	rad/s ²	10,000 max. (Speed of 900 r/min or more must not be changed in less than 10 ms)						
	Brake life	—	10,000,000 operations min.						
	Rating	—	Continuous						
	Insulation grade	—	Type F						

*1. These are the values when the Servomotor is combined with a Servo Drive at room temperature (20°C, 65%). The maximum momentary torque shown above indicates the standard value.

*2. Applicable Load Inertia:

- The operable load inertia ratio (load inertia/rotor inertia) depends on the mechanical configuration and its rigidity. For a machine with high rigidity, operation is possible even with high load inertia. Select an appropriate motor and confirm that operation is possible.
- If the dynamic brake is activated frequently with high load inertia, the dynamic brake resistor may burn. Do not repeatedly turn the Servomotor ON and OFF while the dynamic brake is enabled.

*3. The allowable radial and thrust loads are the values determined for a service life of 20,000 hours at normal operating temperatures. The allowable radial loads are applied as shown in the following diagram.

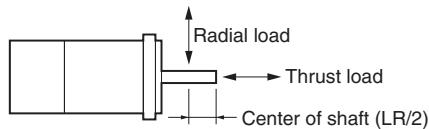

*4. This is an OFF brake. (It is reset when excitation voltage is applied).

*5. The operation time is the value (reference value) measured with a surge suppressor (CR50500 manufactured by Okaya Electric Industries Co., Ltd.).


Torque and Rotation Speed Characteristics

2,000-r/min Cylindrical Servomotors


- 2,000-r/min Servomotors with 200-VAC Power Input

The following graphs show the characteristics with a 3-m standard cable and a 200-VAC input.


R88M-G1K020H/T (1 kW)

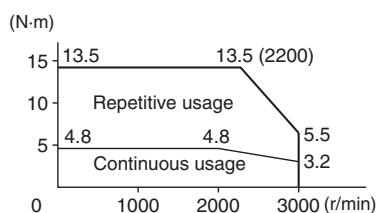


R88M-G1K520H/T (1.5 kW)

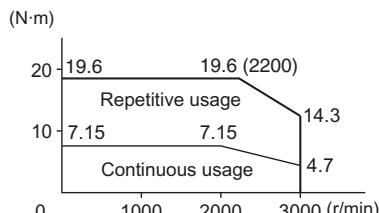


R88M-G2K020H/T (2 kW)

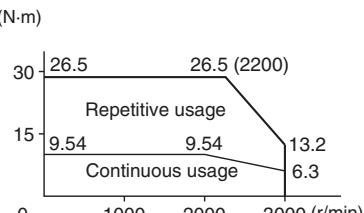


R88M-G3K020H/T (3 kW)

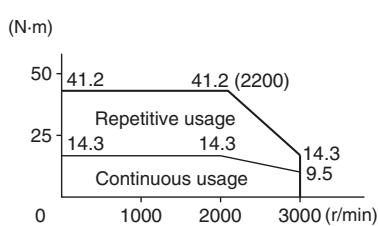


R88M-G4K020H/T (4 kW)

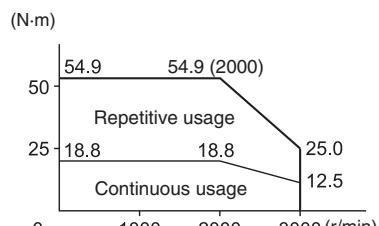

R88M-G5K020H/T (5 kW)

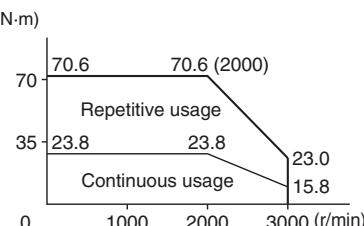

R88M-G7K515H/T (7.5 kW)

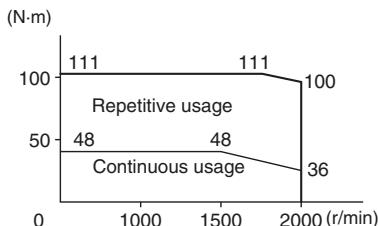

Servomotor Specifications (R88M-G)

● Characteristics

1,000-r/min Cylindrical Servomotors

200-VAC Input Power

Item		Model (R88M-)		-	G2K010H	G3K010H	G4K510H	G6K010H							
		Unit	Item	G90010T	G2K010T	G3K010T	G4K510T	G6K010T							
Rated output ^{*1}		W		900	2000	3000	4500	6000							
Rated torque ^{*1}		N·m		8.62	19.1	28.4	42.9	57.2							
Rated rotation speed		r/min		1000		2000									
Max. momentary rotation speed		r/min		18.4		41.5		60							
Max. momentary torque ^{*1}		N·m		7.6	18.5	24	33	57.2							
Max. momentary current ^{*1}		A (rms)		17.1	44	57.1	84.2	121.4							
Rotor inertia		kg·m² (GD²/4)		1.12×10^{-3}	3.55×10^{-3}	5.57×10^{-3}	8.09×10^{-3}	9.9×10^{-3}							
Applicable load inertia		—		10 times the rotor inertia max. ^{*2}											
Torque constant ^{*1}		N·m/A		1.13	1	1.1	1.3	1.22							
Power rate ^{*1}		kW/s		66.3	103	145	228	331							
Mechanical time constant		ms		0.88	0.97	0.74	0.7	0.65							
Electrical time constant		ms		20	25	30	31	46.2							
Allowable radial load ^{*3}		N		686	1176	1470	1470	1764							
Allowable thrust load ^{*3}		N		196	490	490	490	588							
Weight	Without brake	kg		Approx. 8.5	Approx. 17.5	Approx. 25	Approx. 34	Approx. 41							
	With brake	kg		Approx. 10	Approx. 21	Approx. 28.5	Approx. 39.5	Approx. 45							
Radiation shield dimensions (material)				$275 \times 260 \times t15$ (Al)	$470 \times 440 \times t30$ (Al)										
Applicable Servo Drives (R88D-)				G□15H	G□30H	G□50H	G□50H	G□75H							
Brake specifications	Brake inertia	kg·m² (GD²/4)		1.35×10^{-4}	4.7×10^{-4}	4.7×10^{-4}	4.7×10^{-4}	4.7×10^{-4}							
	Excitation voltage ^{*4}	V		24 VDC ±10%											
	Power consumption (at 20°C)	W		19	31	34									
	Current consumption (at 20°C)	A		0.79	1.3	1.4									
	Static friction torque	N·m		13.7 min.	24.5 min.	58.8 min.									
	Attraction time ^{*5}	ms		100 max.	80 max.	150 max.									
	Release time ^{*5}	ms		50 max.	25 max.	50 max.									
	Backlash			1° (reference value)											
	Allowable work per braking	J		1176	1372										
	Allowable total work	J		1.6×10^6	2.9×10^6										
	Allowable angular acceleration	rad/s²		10,000 max. (Speed of 900 r/min or more must not be changed in less than 10 ms)											
	Brake life	---		10,000,000 operations min.											
	Rating	---		Continuous											
	Insulation grade	---		Type F											

*1. These are the values when the Servomotor is combined with a Servo Drive at room temperature (20°C, 65%). The maximum momentary torque shown above indicates the standard value.


*2. Applicable Load Inertia:

- The operable load inertia ratio (load inertia/rotor inertia) depends on the mechanical configuration and its rigidity. For a machine with high rigidity, operation is possible even with high load inertia. Select an appropriate motor and confirm that operation is possible.
- If the dynamic brake is activated frequently with high load inertia, the dynamic brake resistor may burn. Do not repeatedly turn the Servomotor ON and OFF while the dynamic brake is enabled.

*3. The allowable radial and thrust loads are the values determined for a service life of 20,000 hours at normal operating temperatures. The allowable radial loads are applied as shown in the following diagram.

*4. This is an OFF brake. (It is reset when excitation voltage is applied).

*5. The operation time is the value (reference value) measured with a surge suppressor (CR50500 manufactured by Okaya Electric Industries Co., Ltd.).

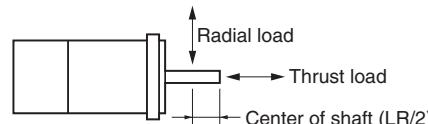


Torque and Rotation Speed Characteristics

1,000-r/min Cylindrical Servomotors


- 1,000-r/min Servomotors with 200-VAC Power Input

The following graphs show the characteristics with a 3-m standard cable and a 200-VAC input.


R88M-G90010T (900 W)

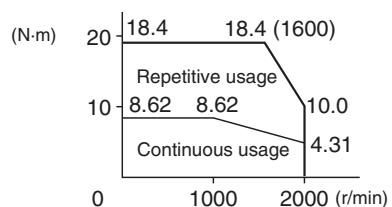


R88M-G2K010H/T (2 kW)

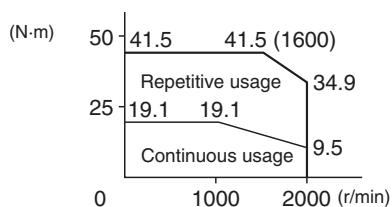


R88M-G3K010H/T (3 kW)

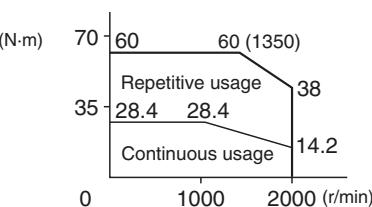

R88M-G4K510H/T (4.5 kW)

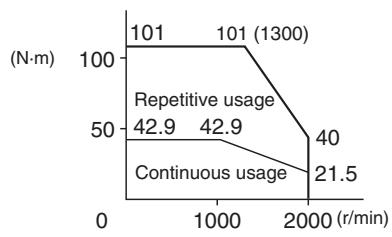

R88M-G6K010H/T (6 kW)

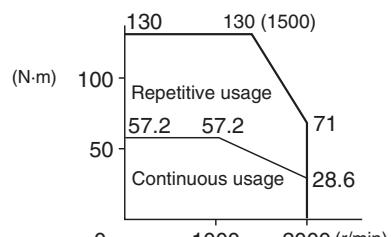

Decelerator Specifications (R88G-HPG/VRSF)

● Backlash: 3 Arcminutes Max.

Decelerators for 3,000-r/min Servomotors

Model		Rated rotation speed r/min	Rated torque N·m	Efficiency %	Maximum momentary rotation speed r/min	Maximum momentary torque N·m	Decelerator inertia kg·m ²	Allowable radial load N	Allowable thrust load N	Weight kg	
								N	kg		
50 W	1/5	R88G-HPG11A05100B	600	0.60	75	1000	1.68	5.00 × 10 ⁻⁷	135	538	0.29
	1/9	R88G-HPG11A09050B	333	1.17	81	555	3.29	3.00 × 10 ⁻⁷	161	642	0.29
	1/21	R88G-HPG14A21100B	143	2.18	65	238	6.13	5.00 × 10 ⁻⁶	340	1358	1.04
	1/33	R88G-HPG14A33050B	91	3.73	71	151	10.5	4.40 × 10 ⁻⁶	389	1555	1.04
	1/45	R88G-HPG14A45050B	67	5.09	71	111	14.3	4.40 × 10 ⁻⁶	427	1707	1.04
100 W	1/5	R88G-HPG11A05100B	600	1.37	86	1000	3.8	5.00 × 10 ⁻⁷	135	538	0.29
	1/11	R88G-HPG14A11100B	273	2.63	75	454	7.39	6.00 × 10 ⁻⁶	280	1119	1.04
	1/21	R88G-HPG14A21100B	143	5.40	80	238	15.2	5.00 × 10 ⁻⁶	340	1358	1.04
	1/33	R88G-HPG20A33100B	91	6.91	65	151	19.4	6.50 × 10 ⁻⁵	916	3226	2.4
	1/45	R88G-HPG20A45100B	67	9.42	65	111	26.5	6.50 × 10 ⁻⁵	1006	3541	2.4
200 W	1/5	R88G-HPG14A05200B	600	2.49	78	1000	6.93	2.07 × 10 ⁻⁵	221	883	1.02
	1/11	R88G-HPG14A11200B	273	6.01	85	454	16.7	1.93 × 10 ⁻⁵	280	1119	1.09
	1/21	R88G-HPG20A21200B	143	10.2	76	238	28.5	4.90 × 10 ⁻⁵	800	2817	2.9
	1/33	R88G-HPG20A33200B	91	17.0	81	151	47.4	4.50 × 10 ⁻⁵	916	3226	2.9
	1/45	R88G-HPG20A45200B	67	23.2	81	111	64.6	4.50 × 10 ⁻⁵	1006	3541	2.9
400 W	1/5	R88G-HPG14A05400B	600	5.66	87	1000	16.0 (15.7)	2.07 × 10 ⁻⁵	221	883	1.09
	1/11	R88G-HPG20A11400B	273	11.7	82	454	33.1 (32.5)	5.70 × 10 ⁻⁵	659	2320	2.9
	1/21	R88G-HPG20A21400B	143	23.5	86	238	66.5 (65.2)	4.90 × 10 ⁻⁵	800	2547	2.9
	1/33	R88G-HPG32A33400B	91	34.7	81	151	98.2 (96.3)	6.20 × 10 ⁻⁵	1565	6240	7.5
	1/45	R88G-HPG32A45400B	67	47.4	81	111	133.9 (131.4)	6.10 × 10 ⁻⁵	1718	6848	7.5
750 W	1/5	R88G-HPG20A05750B	600	9.94	83	1000	29.2	6.80 × 10 ⁻⁵	520	1832	2.9
	1/11	R88G-HPG20A11750B	273	23.2	88	454	68.1	6.00 × 10 ⁻⁵	659	2320	3.1
	1/21	R88G-HPG32A21750B	143	42.3	84	238	124.3	3.00 × 10 ⁻⁴	1367	5448	7.8
	1/33	R88G-HPG32A33750B	91	69.7	88	151	204.7	2.70 × 10 ⁻⁴	1565	6240	7.8
	1/45	R88G-HPG32A45750B	67	95.0	88	111	279.2	2.70 × 10 ⁻⁴	1718	6848	7.8
1 kW	1/5	R88G-HPG32A051K0B	600	11.5	72	1000	32.9	3.90 × 10 ⁻⁴	889	3542	7.3
	1/11	R88G-HPG32A111K0B	273	28.9	83	454	82.6	3.40 × 10 ⁻⁴	1126	4488	7.8
	1/21	R88G-HPG32A211K0B	143	58.1	87	238	166.1	3.00 × 10 ⁻⁴	1367	5448	7.8
	1/33	R88G-HPG32A331K0B	91	94.3	90	151	270.0	2.80 × 10 ⁻⁴	1565	6240	7.8
	1/45	R88G-HPG50A451K0B	67	124.2	87	100 ¹	355.4	4.70 × 10 ⁻⁴	4538	15694	19.0
1.5 kW	1/5	R88G-HPG32A052K0B	600	19.1	80	1000	51.3	3.90 × 10 ⁻⁴	889	3542	7.4
	1/11	R88G-HPG32A112K0B	273	45.7	87	454	122.5	3.40 × 10 ⁻⁴	1126	4488	7.9
	1/21	R88G-HPG32A211K5B	143	90.1	90	238	241.9	3.00 × 10 ⁻⁴	1367	5448	7.9
	1/33	R88G-HPG50A332K0B	91	141.5	90	136 ¹	379.7	4.80 × 10 ⁻⁴	4135	14300	19.0
	1/45	R88G-HPG50A451K5B	67	192.9	90	100 ¹	517.8	4.70 × 10 ⁻⁴	4538	15694	19.0
2 kW	1/5	R88G-HPG32A052K0B	600	26.7	84	1000	77.4	3.90 × 10 ⁻⁴	889	3542	7.4
	1/11	R88G-HPG32A112K0B	273	62.4	89	454	180.7	3.40 × 10 ⁻⁴	1126	4488	7.9
	1/21	R88G-HPG50A212K0B	143	118.9	89	214 ¹	343.9	5.80 × 10 ⁻⁴	3611	12486	19.0
	1/33	R88G-HPG50A332K0B	91	191.8	91	136 ¹	555.0	4.80 × 10 ⁻⁴	4135	14300	19.0
3 kW	1/5	R88G-HPG32A053K0B	600	42.0	88	1000	118.9	3.80 × 10 ⁻⁴	889	3542	7.3
	1/11	R88G-HPG50A113K0B	273	92.3	88	409 ¹	261.4	7.70 × 10 ⁻⁴	2974	10285	19.0
	1/21	R88G-HPG50A213K0B	143	183.0	91	214 ¹	517.7	5.80 × 10 ⁻⁴	3611	12486	19.0
4 kW	1/5	R88G-HPG32A054K0B	600	53.9	90	900 ¹	163.4	3.80 × 10 ⁻⁴	889	3542	7.9
	1/11	R88G-HPG50A115K0B	273	124.6	90	409 ¹	359.0	8.80 × 10 ⁻⁴	2974	10285	19.1
5 kW	1/5	R88G-HPG50A055K0B	600	69.3	88	900 ¹	197.8	1.20 × 10 ⁻³	2347	8118	17.7
	1/11	R88G-HPG50A115K0B	273	158.4	91	409 ¹	451.9	8.80 × 10 ⁻⁴	2974	10285	19.1

Note: 1. The values inside parentheses () are for 100-V Servomotors.

Note: 2. The Decelerator inertia is the Servomotor shaft conversion value.

Note: 3. The protective structure for Servomotors with Decelerators satisfies IP44.

Note: 4. The allowable radial load is the value at the LR/2 position.

Note: 5. The standard models have a straight shaft. Models with a key and tap are indicated by adding "J" to the end of the model number (the suffix in the box).

Decelerators for 3,000-r/min Flat Servomotors

Model			Rated rotation speed	Rated torque	Efficiency	Maximum momentary rotation speed	Maximum momentary torque	Decelerator inertia	Allowable radial load	Allowable thrust load	Weight
100 W	1/5	R88G-HPG11A05100PB	600	1.37	85	1000	3.67 (3.59)	5.00×10^{-7}	135	538	0.34
	1/11	R88G-HPG14A11100PB	273	2.63	75	454	7.06 (6.89)	6.00×10^{-6}	280	1119	1.04
	1/21	R88G-HPG14A21100PB	143	5.40	80	238	14.5 (14.2)	5.00×10^{-6}	340	1358	1.04
	1/33	R88G-HPG20A33100PB	91	6.91	65	151	18.6 (18.1)	4.50×10^{-5}	916	3226	2.9
	1/45	R88G-HPG20A45100PB	67	9.42	65	111	25.3 (24.7)	4.50×10^{-5}	1006	3541	2.9
200 W	1/5	R88G-HPG14A05200PB	600	2.49	78	1000	7.01	2.07×10^{-5}	221	883	0.99
	1/11	R88G-HPG20A11200PB	273	4.75	68	454	13.4	5.80×10^{-5}	659	2320	3.1
	1/21	R88G-HPG20A21200PB	143	10.2	76	238	28.8	4.90×10^{-5}	800	2817	3.1
	1/33	R88G-HPG20A33200PB	91	17.0	81	151	47.9	4.50×10^{-5}	916	3226	3.1
	1/45	R88G-HPG20A45200PB	67	23.2	81	111	65.4	4.50×10^{-5}	1006	3541	3.1
400 W	1/5	R88G-HPG20A05400PB	600	4.67	72	1000 (900)	13.1 (12.9)	7.10×10^{-5}	520	1832	3.1
	1/11	R88G-HPG20A11400PB	273	11.7	82	454 (409)	32.9 (32.4)	5.80×10^{-5}	659	2320	3.1
	1/21	R88G-HPG20A21400PB	143	23.5	86	238 (214)	66.2 (65.2)	4.90×10^{-5}	800	2817	3.1
	1/33	R88G-HPG32A33400PB	91	34.7	81	151 (136)	97.6 (96.2)	2.80×10^{-4}	1565	6240	7.8
	1/45	R88G-HPG32A45400PB	67	47.4	81	111 (100)	133.0 (131.2)	2.80×10^{-4}	1718	6848	7.8

Note: 1. The values inside parentheses () are for 100-V Servomotors.

Note: 2. The Decelerator inertia is the Servomotor shaft conversion value.

Note: 3. The protective structure for Servomotors with Decelerators satisfies IP44.

Note: 4. The allowable radial load is the value at the LR/2 position.

Note: 5. The standard models have a straight shaft. Models with a key and tap are indicated by adding "J" to the end of the model number (the suffix in the box).

Decelerators for 2,000-r/min Servomotors

Model			Rated rotation speed	Rated torque	Efficiency	Maximum momentary rotation speed	Maximum momentary torque	Decelerator inertia	Allowable radial load	Allowable thrust load	Weight
									r/min	N·m	
1 kW	1/5	R88G-HPG32A053K0B	400	20.4	85	600	57.4	3.80×10^{-4}	889	3542	7.3
	1/11	R88G-HPG32A112K0SB	182	47.3	90	273	133.1	3.40×10^{-4}	1126	4488	7.8
	1/21	R88G-HPG32A211K0SB	95	92.3	92	143	259.7	2.90×10^{-4}	1367	5448	7.8
	1/33	R88G-HPG50A332K0SB	60	144.9	92	91	407.6	4.70×10^{-4}	4135	14300	19.0
	1/45	R88G-HPG50A451K0SB	44	197.7	92	67	555.9	4.70×10^{-4}	4538	15694	19.0
1.5 kW	1/5	R88G-HPG32A053K0B	400	31.7	89	600	86.8	3.80×10^{-4}	889	3542	7.3
	1/11	R88G-HPG32A112K0SB	182	72.1	92	273	197.7	3.40×10^{-4}	1126	4488	7.8
	1/21	R88G-HPG50A213K0B	95	137.5	92	143	377.0	5.80×10^{-4}	3611	12486	19.0
	1/33	R88G-HPG50A332K0SB	60	219.4	93	91	601.5	4.70×10^{-4}	4135	14300	19.0
2 kW	1/5	R88G-HPG32A053K0B	400	43.2	91	600	119.9	3.80×10^{-4}	889	3542	7.3
	1/11	R88G-HPG32A112K0SB	182	97.4	93	273	270.5	3.40×10^{-4}	1126	4488	7.8
	1/21	R88G-HPG50A213K0B	95	185.6	93	143	515.9	5.80×10^{-4}	3611	12486	19.0
	1/33	R88G-HPG50A332K0SB	60	270.0 ^{*1}	93	91	815.0	4.70×10^{-4}	4135	14300	19.0
3 kW	1/5	R88G-HPG32A054K0B	400	66.0	92	600	190.1	3.80×10^{-4}	889	3542	7.9
	1/11	R88G-HPG50A115K0B	182	145.2	92	273	418.3	8.80×10^{-4}	2974	10285	19.1
	1/21	R88G-HPG50A213K0SB	95	260.0 ^{*1}	93	143	806.4	6.90×10^{-4}	3611	12486	19.1
	1/25	R88G-HPG65A253K0SB	80	322.9	90	120	930.1	3.00×10^{-3}	7846	28654	52.0
4 kW	1/5	R88G-HPG50A054K0SB	400	85.8	91	600	250.3	1.20×10^{-3}	2347	8118	18.6
	1/11	R88G-HPG50A114K0SB	182	192.7	93	273	562.8	8.70×10^{-4}	2974	10285	20.1
	1/20	R88G-HPG65A204K0SB	100	342.2	91	150	999.2	3.28×10^{-3}	7338	26799	52.0
	1/25	R88G-HPG65A254K0SB	80	430.9	92	120	1258.6	3.24×10^{-3}	7846	28654	52.0
5 kW	1/5	R88G-HPG50A055K0SB	400	109.8	92	600	325.5	1.10×10^{-3}	2347	8118	22.0
	1/11	R88G-HPG50A115K0SB	182	200.0 ^{*1}	93	273	723.8	8.40×10^{-4}	2974	10285	23.5
	1/20	R88G-HPG65A205K0SB	100	438.2	92	150	1300.5	2.85×10^{-3}	7338	26799	55.4
	1/25	R88G-HPG65A255K0SB	80	550.9	93	120	1634.4	2.81×10^{-3}	7846	28654	55.4
7.5 kW	1/5	R88G-HPG65A057K5SB	300	221.1	92	400	511.2	2.07×10^{-2}	4841	17681	48.0
	1/12	R88G-HPG65A127K5SB	125	540.8	94	166	1250.7	2.02×10^{-2}	6295	22991	52.0

*1. "Rated torque" indicates the allowable rated torque for the decelerator. Do not exceed this value.

Note: 1. The Decelerator inertia is the Servomotor shaft conversion value.

Note: 2. The protective structure for Servomotors with Decelerators satisfies IP44.

Note: 3. The allowable radial load is the value at the LR/2 position.

Note: 4. The standard models have a straight shaft. Models with a key and tap are indicated with "J" at the end of the model number (the suffix in the box).

Decelerators for 1,000-r/min Servomotors

Model			Rated rotation speed	Rated torque	Efficiency	Maximum momentary rotation speed	Maximum momentary torque	Decelerator inertia	Allowable radial load	Allowable thrust load	Weight
900 W	1/5	R88G-HPG32A05900TB	200	39.9	93	400	85.2	3.80×10^{-4}	889	3542	7.9
	1/11	R88G-HPG32A11900TB	90	89.0	94	182	190.1	3.40×10^{-4}	1126	4488	8.4
	1/21	R88G-HPG50A21900TB	47	169.8	94	95	362.4	7.00×10^{-4}	3611	12486	19.1
	1/33	R88G-HPG50A33900TB	30	268.5	94	60	573.2	5.90×10^{-4}	4135	14300	19.1
2 kW	1/5	R88G-HPG32A052K0TB	200	90.2	95	400	196.1	4.90×10^{-4}	889	3542	8.9
	1/11	R88G-HPG50A112K0TB	90	198.4	94	182	430.9	8.40×10^{-4}	2974	10285	20.1
	1/21	R88G-HPG50A212K0TB	47	320.0 ¹	95	95	786.8	6.50×10^{-4}	3611	12486	20.1
	1/25	R88G-HPG65A255K0SB	40	446.7	94	80	971.1	2.81×10^{-3}	7846	28654	55.4
3 kW	1/5	R88G-HPG50A055K0SB	200	133.9	94	400	282.9	1.10×10^{-3}	2347	8118	22.0
	1/11	R88G-HPG50A115K0SB	90	246.0 ¹	95	182	684.0	8.40×10^{-4}	2974	10285	23.5
	1/20	R88G-HPG65A205K0SB	50	534.7	94	100	1129.2	2.85×10^{-3}	7338	26799	55.4
	1/25	R88G-HPG65A255K0SB	40	669.9	94	80	1411.5	2.81×10^{-3}	7846	28654	55.4
4.5 kW	1/5	R88G-HPG50A054K5TB	200	203.5	95	400	479.2	1.20×10^{-3}	2347	8118	22.0
	1/12	R88G-HPG65A127K5SB	83	485.6	94	166	1142.9	2.02×10^{-2}	6295	22991	52.0
	1/20	R88G-HPG65A204K5TB	50	813.1	95	100	1915.0	1.92×10^{-2}	7338	26799	52.0
6 kW	1/5	R88G-HPG65A057K5SB	200	268.1	94	400	609.7	2.07×10^{-2}	4841	17681	48.0
	1/12	R88G-HPG65A127K5SB	83	650.3	95	166	1477.3	2.02×10^{-2}	6295	22991	52.0

*1. "Rated torque" indicates the allowable rated torque for the decelerator. Do not exceed this value.

Note: 1. The Decelerator inertia is the Servomotor shaft conversion value.

Note: 2. The protective structure for Servomotors with Decelerators satisfies IP44.

Note: 3. The allowable radial load is the value at the LR/2 position.

Note: 4. The standard models have a straight shaft. Models with a key and tap are indicated with "J" at the end of the model number (the suffix in the box).

● Backlash: 15 Arcminutes Max.

Decelerators for 3,000-r/min Servomotors

Model			Rated rotation speed	Rated torque	Efficiency	Maximum momentary rotation speed	Maximum momentary torque	Decelerator inertia	Allowable radial load	Allowable thrust load	Weight
50 W	1/5	R88G-VRSF05B100CJ	600	0.52	65	1000	1.46	4.00×10^{-6}	392	196	0.55
	1/9	R88G-VRSF09B100CJ	333	0.93	65	556	2.63	3.50×10^{-6}	441	220	0.55
	1/15	R88G-VRSF15B100CJ	200	1.67	70	333	4.73	3.50×10^{-6}	588	294	0.70
	1/25	R88G-VRSF25B100CJ	120	2.78	70	200	7.88	3.25×10^{-6}	686	343	0.70
100 W	1/5	R88G-VRSF05B100CJ	600	1.19	75	1000	3.38	4.00×10^{-6}	392	196	0.55
	1/9	R88G-VRSF09B100CJ	333	2.29	80	556	6.48	3.50×10^{-6}	441	220	0.55
	1/15	R88G-VRSF15B100CJ	200	3.81	80	333	10.8	3.50×10^{-6}	588	294	0.70
	1/25	R88G-VRSF25B100CJ	120	6.36	80	200	18.0	3.25×10^{-6}	686	343	0.70
200 W	1/5	R88G-VRSF05B200CJ	600	2.70	85	1000	7.57	1.18×10^{-5}	392	196	0.72
	1/9	R88G-VRSF09C200CJ	333	3.77	66	556	10.6	2.75×10^{-5}	931	465	1.70
	1/15	R88G-VRSF15C200CJ	200	6.29	66	333	17.6	3.00×10^{-5}	1176	588	2.10
	1/25	R88G-VRSF25C200CJ	120	11.1	70	200	31.2	2.88×10^{-5}	1323	661	2.10
400 W	1/5	R88G-VRSF05C400CJ	600	5.40	85	1000	15.6 (15.3)	3.63×10^{-5}	784	392	1.70
	1/9	R88G-VRSF09C400CJ	333	9.50	83	556	27.4 (26.8)	2.75×10^{-5}	931	465	1.70
	1/15	R88G-VRSF15C400CJ	200	15.8	83	333	45.7 (44.8)	3.00×10^{-5}	1176	588	2.10
	1/25	R88G-VRSF25C400CJ	120	26.4	83	200	76.1 (74.7)	2.88×10^{-5}	1323	661	2.10
750 W	1/5	R88G-VRSF05C750CJ	600	10.7	90	1000	31.7	7.13×10^{-5}	784	392	2.10
	1/9	R88G-VRSF09D750CJ	333	18.2	85	556	53.9	6.50×10^{-5}	1176	588	3.40
	1/15	R88G-VRSF15D750CJ	200	30.4	85	333	89.9	7.00×10^{-5}	1372	686	3.80
	1/25	R88G-VRSF25D750CJ	120	50.7	85	200	149.8	6.80×10^{-5}	1617	808	3.80

Note: 1. The values inside parentheses () are for 100-V Servomotors.

Note: 2. The Decelerator inertia is the Servomotor shaft conversion value.

Note: 3. The protective structure for Servomotors with Decelerators satisfies IP44.

Note: 4. The allowable radial load is the value at the LR/2 position.

Note: 5. The standard models have a straight shaft with a key.

Decelerators for 3,000-r/min Flat Servomotor

Model			Rated rotation speed	Rated torque	Efficiency	Maximum momentary rotation speed	Maximum momentary torque	Decelerator inertia	Allowable radial load	Allowable thrust load	Weight
100 W	1/5	R88G-VRSF05B100PCJ	600	1.19	75	1000	3.15	4.00×10^{-6}	392	196	0.72
	1/9	R88G-VRSF09B100PCJ	333	2.29	80	556	6.048	3.50×10^{-6}	441	220	0.72
	1/15	R88G-VRSF15B100PCJ	200	3.81	80	333	10.08	3.50×10^{-6}	588	294	0.87
	1/25	R88G-VRSF25B100PCJ	120	6.36	80	200	16.8	3.25×10^{-6}	686	343	0.87
200 W	1/5	R88G-VRSF05B200PCJ	600	2.70	85	1000	7.65	1.18×10^{-5}	392	196	0.85
	1/9	R88G-VRSF09C200PCJ	333	3.77	66	556	10.692	2.75×10^{-5}	931	465	1.80
	1/15	R88G-VRSF15C200PCJ	200	6.29	66	333	17.82	3.00×10^{-5}	1176	588	2.20
	1/25	R88G-VRSF25C200PCJ	120	11.1	70	200	31.5	2.88×10^{-5}	1323	661	2.20
400 W	1/5	R88G-VRSF05C400PCJ	600	5.40	85	1000 (900)	15.5 (15.3)	3.63×10^{-5}	784	392	1.80
	1/9	R88G-VRSF09C400PCJ	333	9.50	83	556 (500)	27.3 (26.9)	2.75×10^{-5}	931	465	1.80
	1/15	R88G-VRSF15C400PCJ	200	15.8	83	333 (300)	45.4 (44.8)	3.00×10^{-5}	1176	588	2.20
	1/25	R88G-VRSF25C400PCJ	120	26.4	83	200 (180)	75.7 (74.7)	2.88×10^{-5}	1323	661	2.20

Note: 1. The values inside parentheses () are for 100-V Servomotors.

Note: 2. The Decelerator inertia is the Servomotor shaft conversion value.

Note: 3. The protective structure for Servomotors with Decelerators satisfies IP44.

Note: 4. The allowable radial load is the value at the LR/2 position.

Note: 5. The standard models have a straight shaft with a key.

Encoder, External Regeneration Resistors, Reactor and Parameter Unit Specifications

● Encoder Specifications

Incremental Encoders

Item	Specifications
Encoder system	Optical encoder
No. of output pulses	Phases A and B: 2,500 pulses/rotation, Phase Z: 1 pulse/rotation
Power supply voltage	5 VDC ±5%
Power supply current	180 mA (max.)
Output signals	+S, -S
Output interface	RS-485 compliance

Absolute Encoders

Item	Specifications
Encoder system	Optical encoder
	17 bits
No. of output pulses	Phases A and B: 32,768 pulses/rotation, Phase Z: 1 pulse/rotation
Maximum rotations	-32,768 to +32,767 rotations or 0 to 65,534 rotations
Power supply voltage	5 VDC ±5%
Power supply current	110 mA (max.)
Applicable battery voltage	3.6 VDC
Current consumption of battery	180 µA for a maximum of 5 s right after power interruption 100 µA for operation during power interruption 3.6 µA when power is supplied to Servo Drive
Output signals	+S, -S
Output interface	RS-485 compliance

● External Regeneration Resistors Specifications

Model	Resistance	Nominal capacity	Regeneration absorption for 120°C temperature rise	Heat radiation condition	Thermal switch output specifications
R88A-RR08050S	50 Ω	80 W	20 W	Aluminum 250 × 250, Thickness: 3.0	Operating temperature: 150°C±5%, NC contact, Rated output: 30 VDC, 50 mA max.
R88A-RR080100S	100 Ω				
R88A-RR22047S	47 Ω	220 W	70 W	Aluminum 350 × 350, Thickness: 3.0	Operating temperature: 170°C±5%, NC contact, Rated output: 3 A
R88A-RR50020S	20 Ω	500 W	180 W	Aluminum 600 × 600, Thickness: 3.0	Operating temperature: 200°C±7%, NC contact, Rated output: 250 VAC, 0.2 A max. 24 VDC, 0.2 A max.

● Reactor Specifications

Servo Drive	Reactor				Reactor type
	Model	Rated current	Inductance	Weight	
R88D-G□A5L(-ML2) R88D-G□01H(-ML2)	3G3AX-DL2002	1.6 A	21.4 mH	Approx. 0.8 kg	Single-phase
R88D-G□01L(-ML2) R88D-G□02H(-ML2)	3G3AX-DL2004	3.2 A	10.7 mH	Approx. 1.0 kg	Single-phase
R88D-G□02L(-ML2) R88D-G□04H(-ML2)	3G3AX-DL2007	6.1 A	6.75 mH	Approx. 1.3 kg	Single-phase
R88D-G□04L(-ML2) R88D-G□08H(-ML2) R88D-G□10H(-ML2)	3G3AX-DL2015	9.3 A	3.51 mH	Approx. 1.6 kg	Single-phase
R88D-G□15H(-ML2)	3G3AX-DL2022	13.8 A	2.51 mH	Approx. 2.1 kg	Single-phase
R88D-G□08H(-ML2) R88D-G□10H(-ML2) R88D-G□15H(-ML2)	3G3AX-AL2025	10.0 A	2.8 mH	Approx. 2.8 kg	Three-phase
R88D-G□20H(-ML2) R88D-G□30H(-ML2)	3G3AX-AL2055	20.0 A	0.88 mH	Approx. 4.0 kg	Three-phase
R88D-G□50H(-ML2)	3G3AX-AL2110	34.0 A	0.35 mH	Approx. 5.0 kg	Three-phase
R88D-G□75H(-ML2)	3G3AX-AL2220	67.0 A	0.18 mH	Approx. 10.0 kg	Three-phase

● R88A-PR02G Parameter Unit Specifications


General Specifications

Item	Specifications
Operating ambient temperature	0 to 55°C
Operating ambient humidity	90% max. (with no condensation)
Storage ambient temperature	-20 to 80°C
Storage ambient humidity	90% max. (with no condensation)
Storage and operating atmosphere	No corrosive gases
Vibration resistance	5.9 m/s ² max.

Performance Specifications


Item	Specifications
Type	Hand-held
Cable length	1.5 m
Connectors	Mini DIN 8-pin MD connector
Display	7-segment LED
External dimensions	62 × 114 × 15 mm (W × H × D)
Weight	Approx. 0.1 kg (including cable that is provided)
Communications specifications	
Standard	RS-232
Communications method	Asynchronous (ASYNC)
Baud rate	9,600 bps
Start bits	1 bit
Data	8 bits
Parity	None
Stop bits	1 bit

Control I/O Signal Connections and External Signal Processing for Position Control (For R88D-GT)

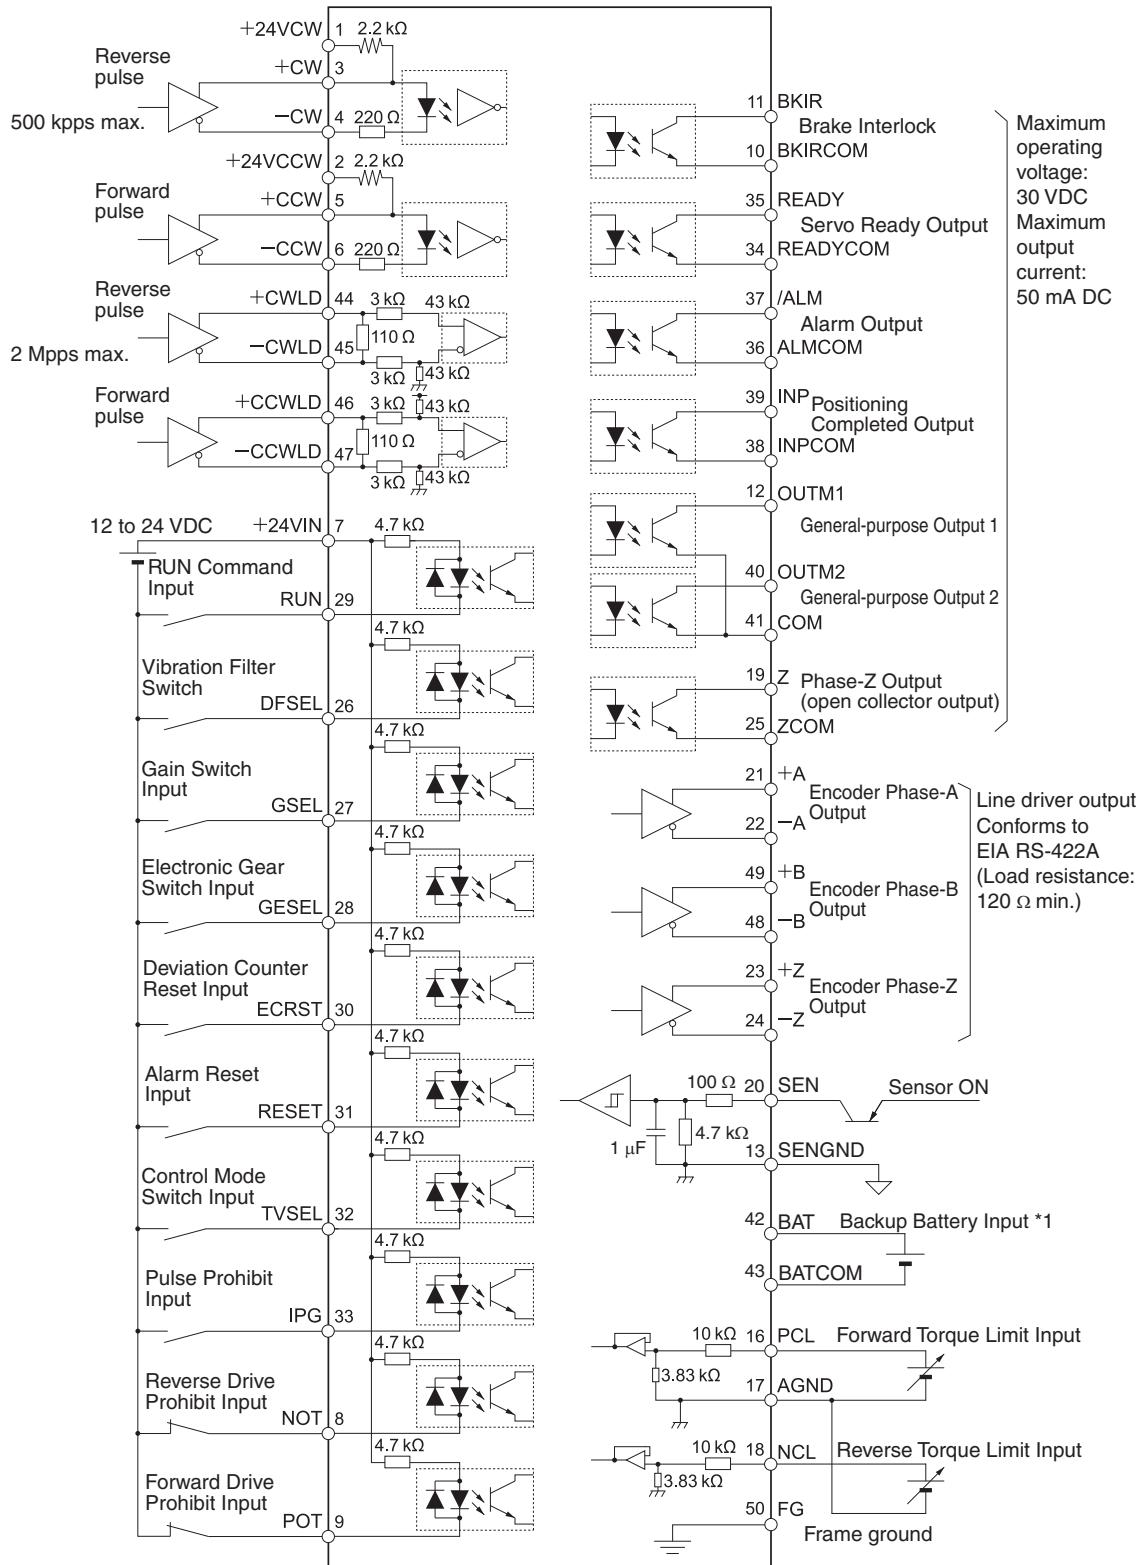


*1. If a backup battery is connected, a cable with a battery is not required.

Control I/O Signal Connections and External Signal Processing for Speed Control (For R88D-GT)

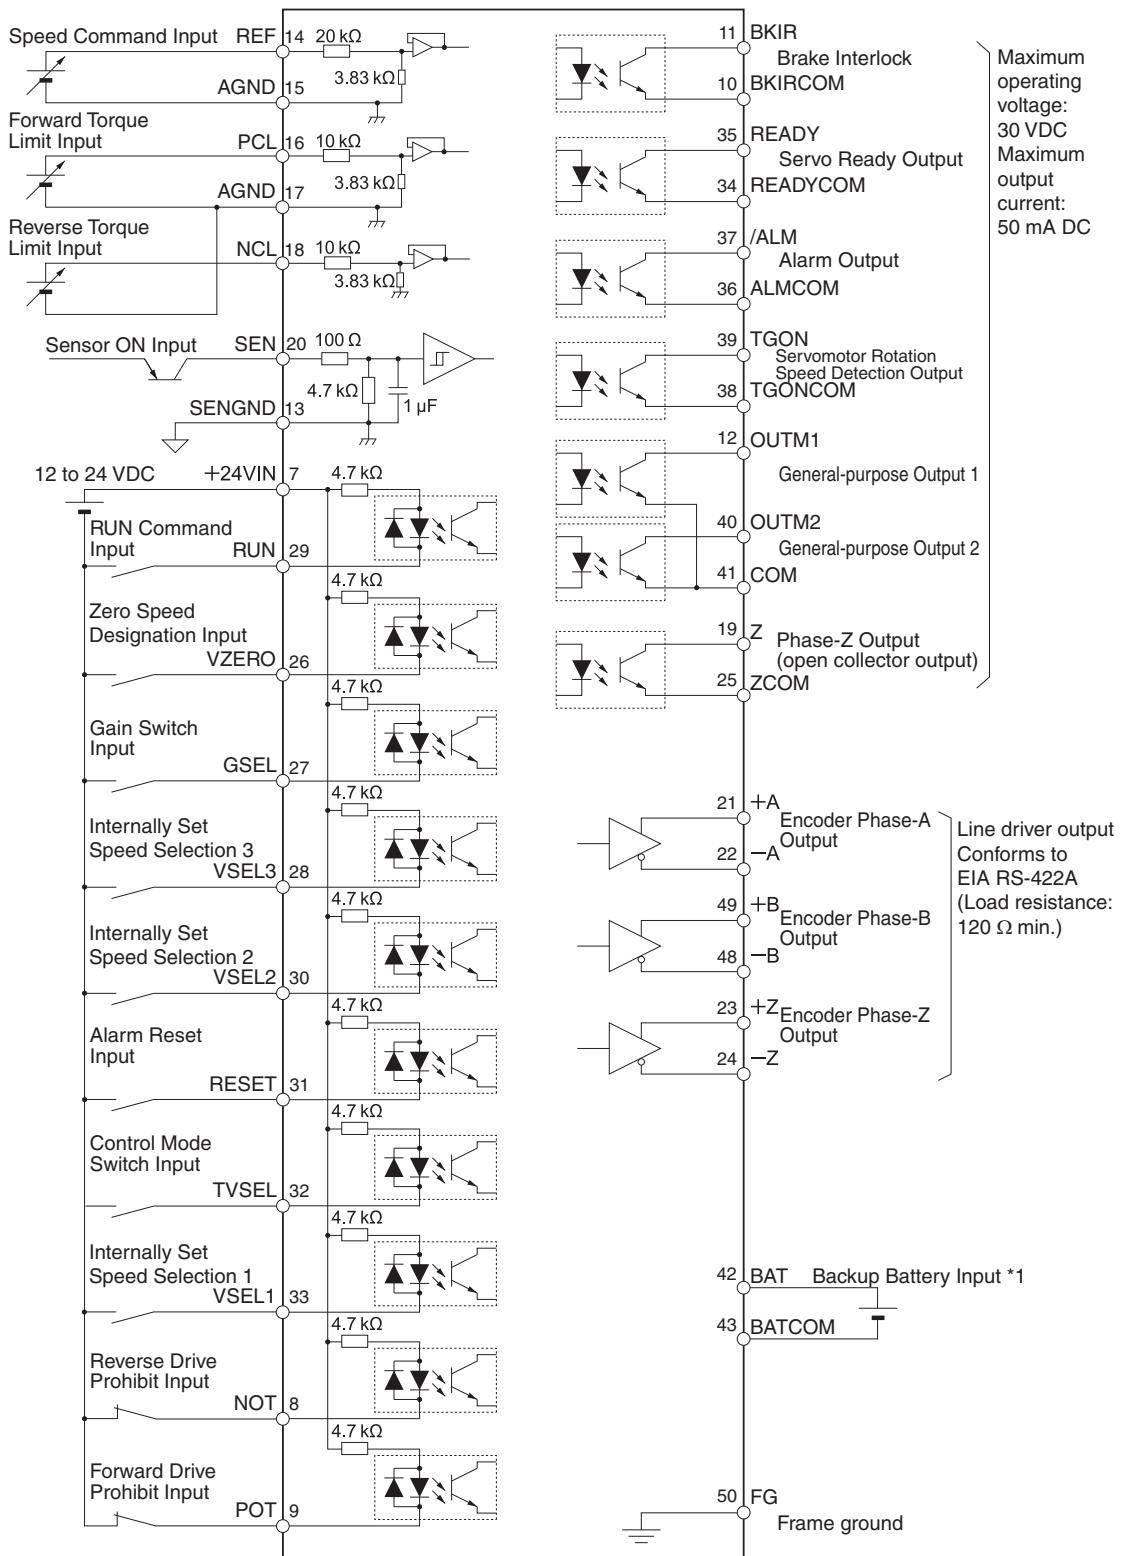


*1. If a backup battery is connected, a cable with a battery is not required.

Control I/O Signal Connections and External Signal Processing for Torque Control (For R88D-GT)

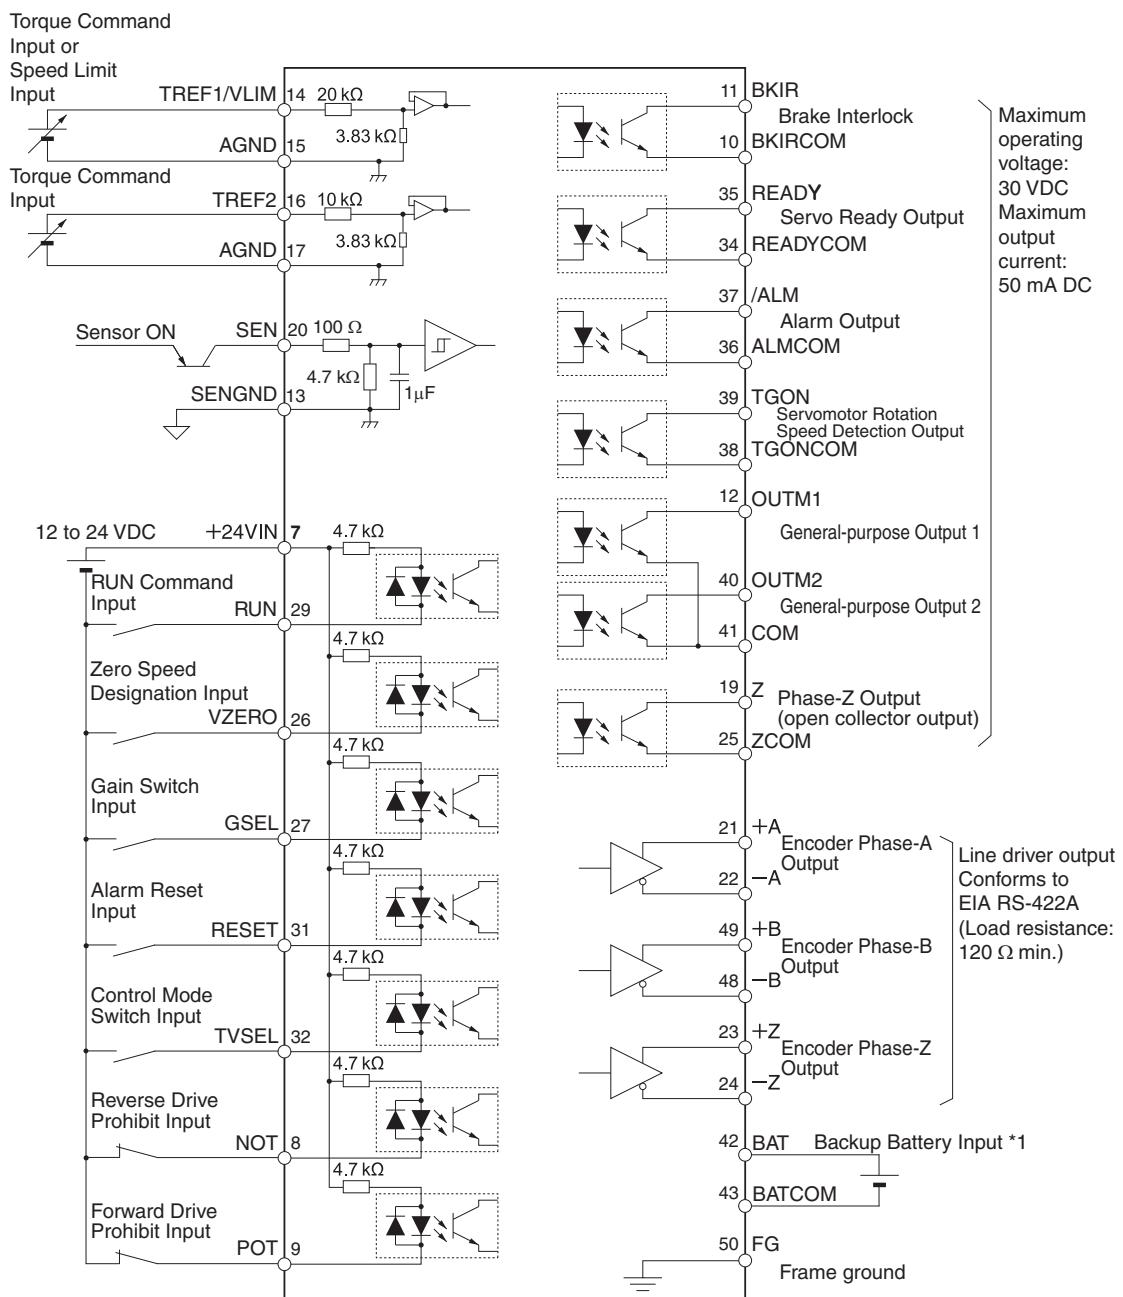

Control I/O Signal Connections and External Signal Processing (For R88D-GN)

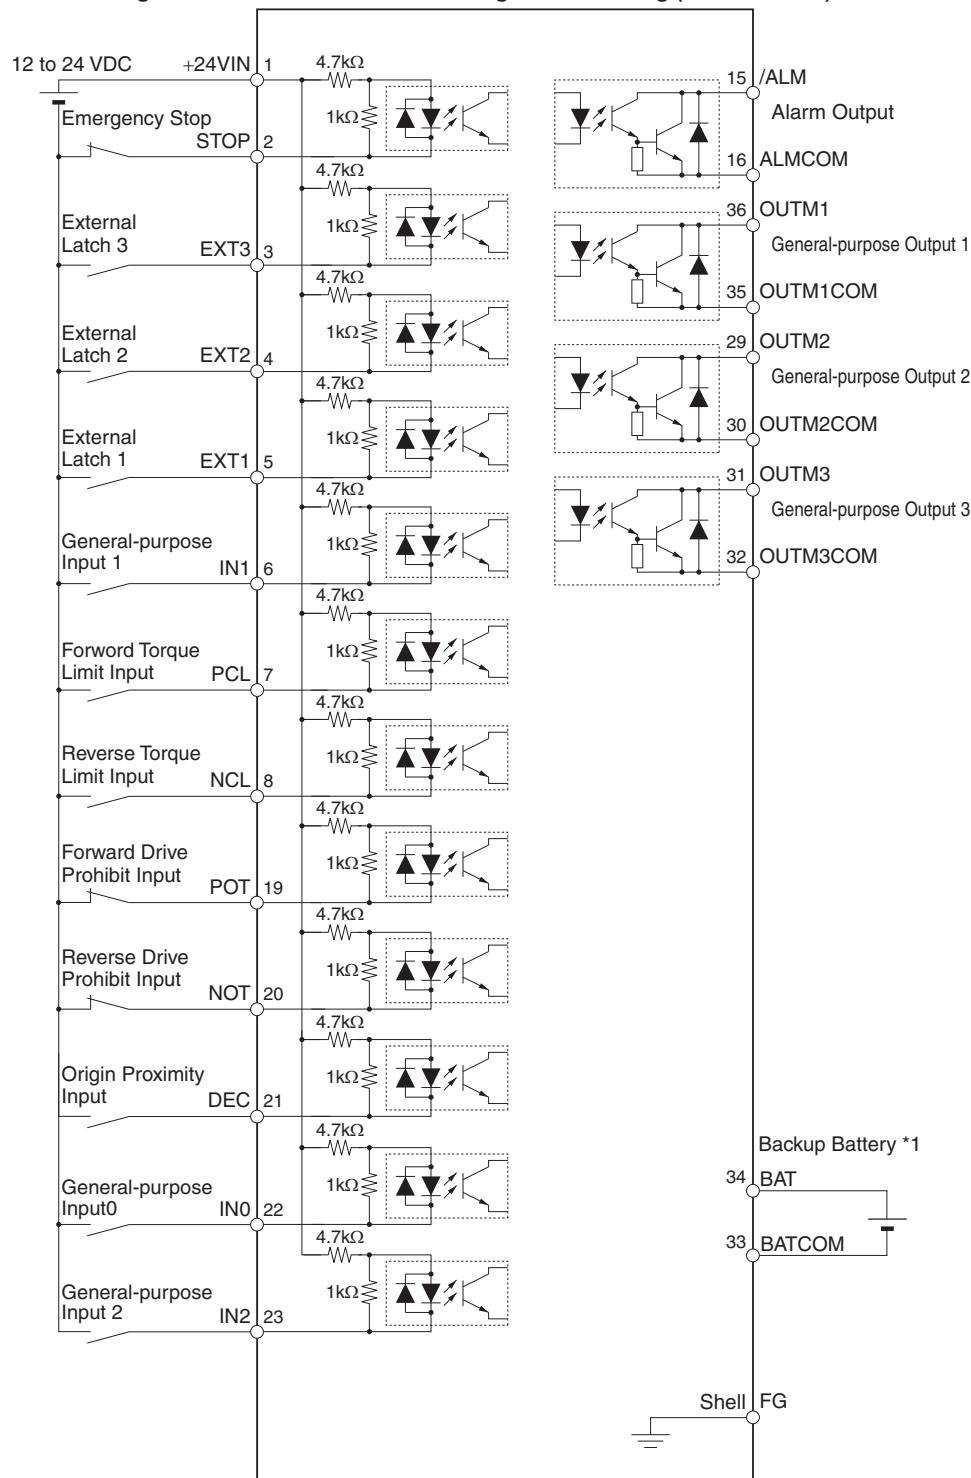


*1. If a backup battery is connected, a cable with a battery is not required.

*2. Inputs for pins 19 and 20 are determined by parameter settings. The diagram shows the default configuration.

● Peripheral Device Connection Examples

R88D-G□A5L(-ML2)/-G□01L(-ML2)/-G□02L(-ML2)/-G□04L(-ML2)

R88D-G□01H(-ML2)/-G□02H(-ML2)/-G□04H(-ML2)/-G□018H(-ML2)/G□10H(-ML2)/-G□15H(-ML2)

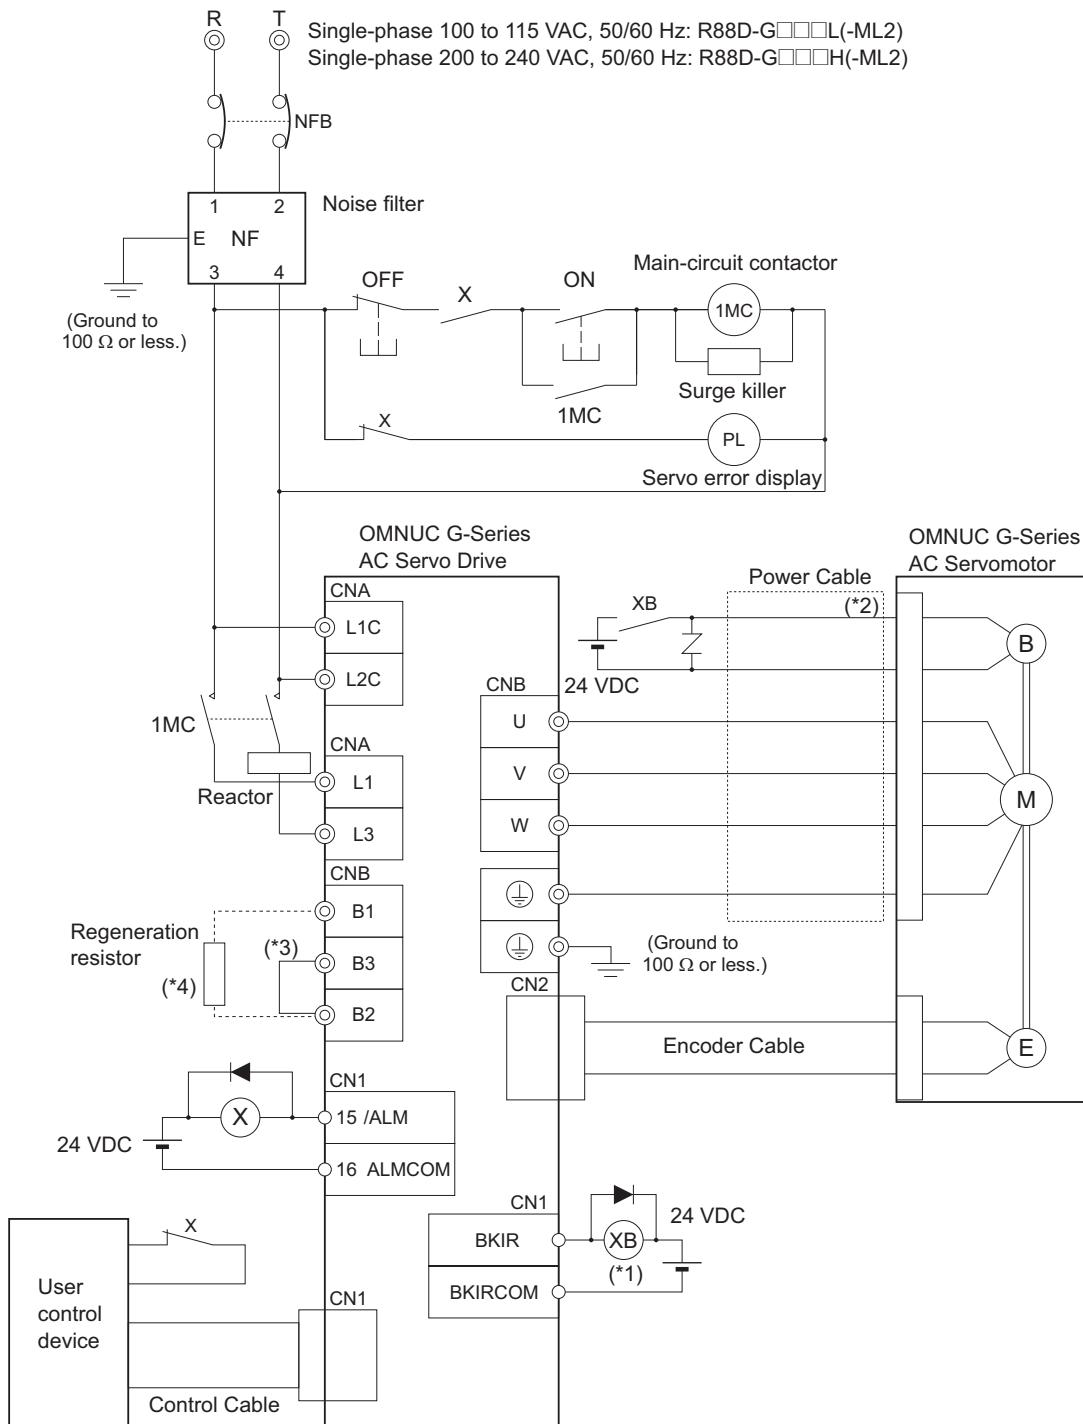


*1. Recommended relay: MY Relay (24 V), by OMRON. For example, the MY2 Relay's rated inductive load is 2 A at 24 VDC and applicable to all G-Series Servomotors with brakes.

*2. The brake is not affected by the polarity of the power supply.

*3. Connect B2-B3 for the models with a built-in regeneration resistor (G□04L(-ML2), G□08H(-ML2), G□10H(-ML2), and G□15H(-ML2)). If the amount of regeneration is large, disconnect B2-B3 and connect an External Regeneration Resistor to B1-B2.


*4. The models G□A5L(-ML2) to G□02L(-ML2) and G□01H(-ML2) to G□04H(-ML2) do not have a built-in regeneration resistor. If the amount of regeneration is large, an External Regeneration Resistor must be connected to B1-B2.

R88D-G□08H(-ML2)/-G□10H(-ML2)/-G□15H(-ML2)

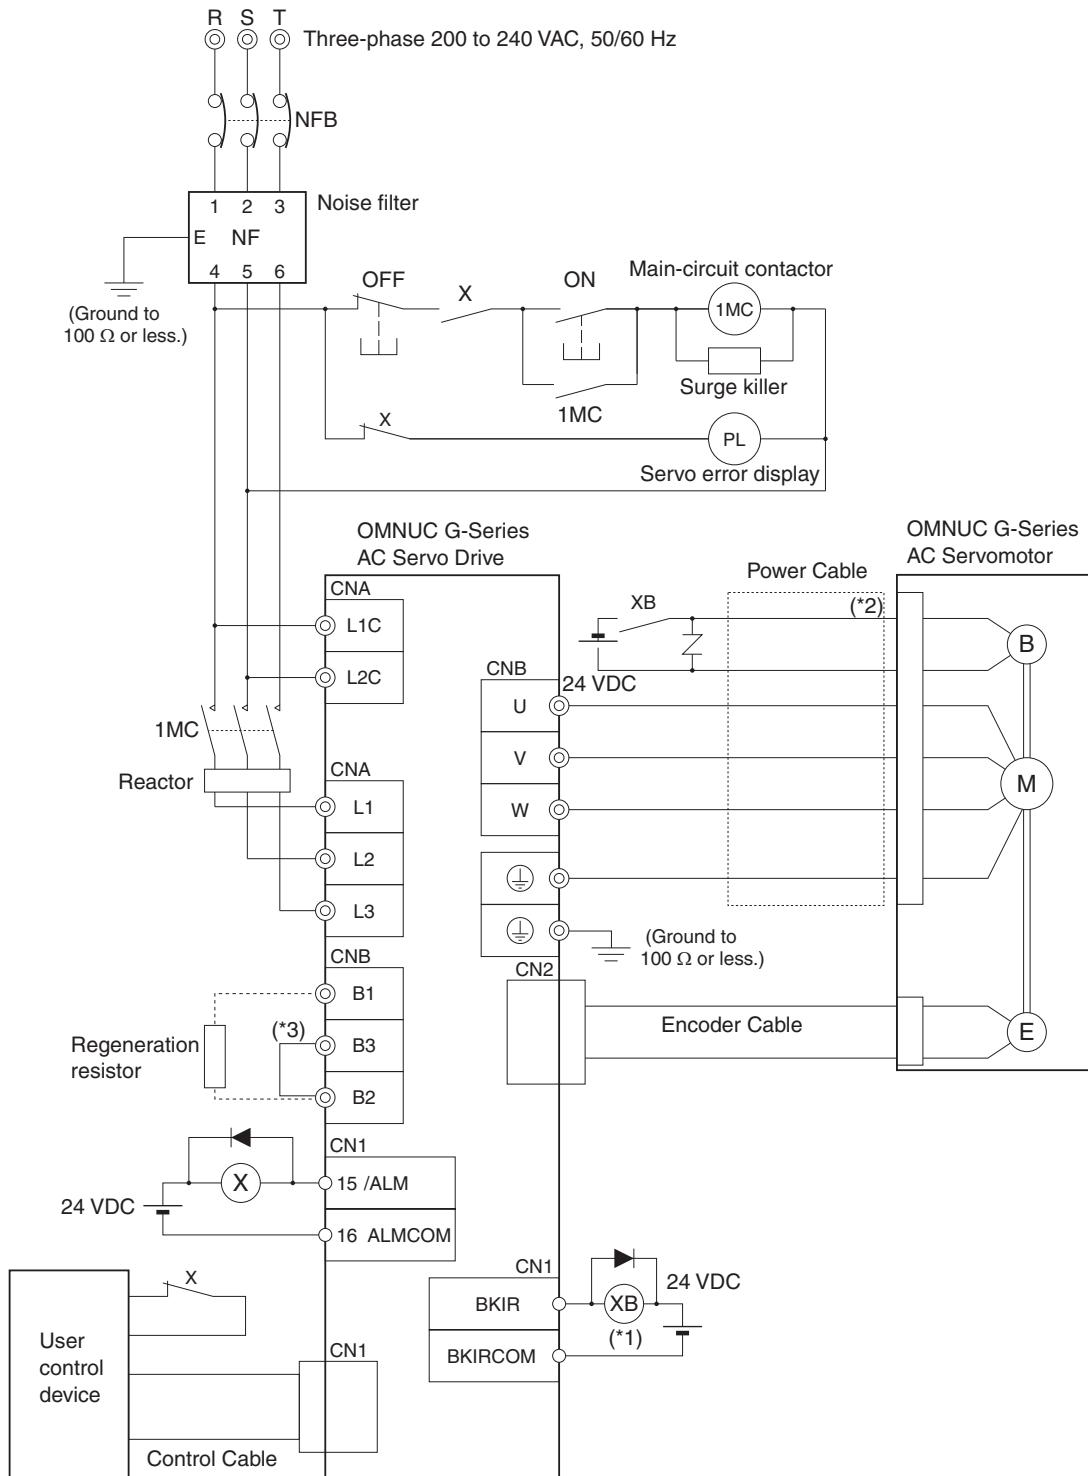

- *1. Recommended relay: MY Relay (24 V), by OMRON. For example, the MY2 Relay's rated inductive load is 2 A at 24 VDC and applicable to all G-Series Servomotors with brakes.
- *2. The brake is not affected by the polarity of the power supply.
- *3. Connect B2-B3 for the models with a built-in regeneration resistor [G□08H(-ML2) to G□15H(-ML2)].
If the amount of regeneration is large, disconnect B2-B3 and connect an External Regeneration Resistor to B1-B2.

R88D-G□20H(-ML2)/-G□30H(-ML2)/-G□50H(-ML2)

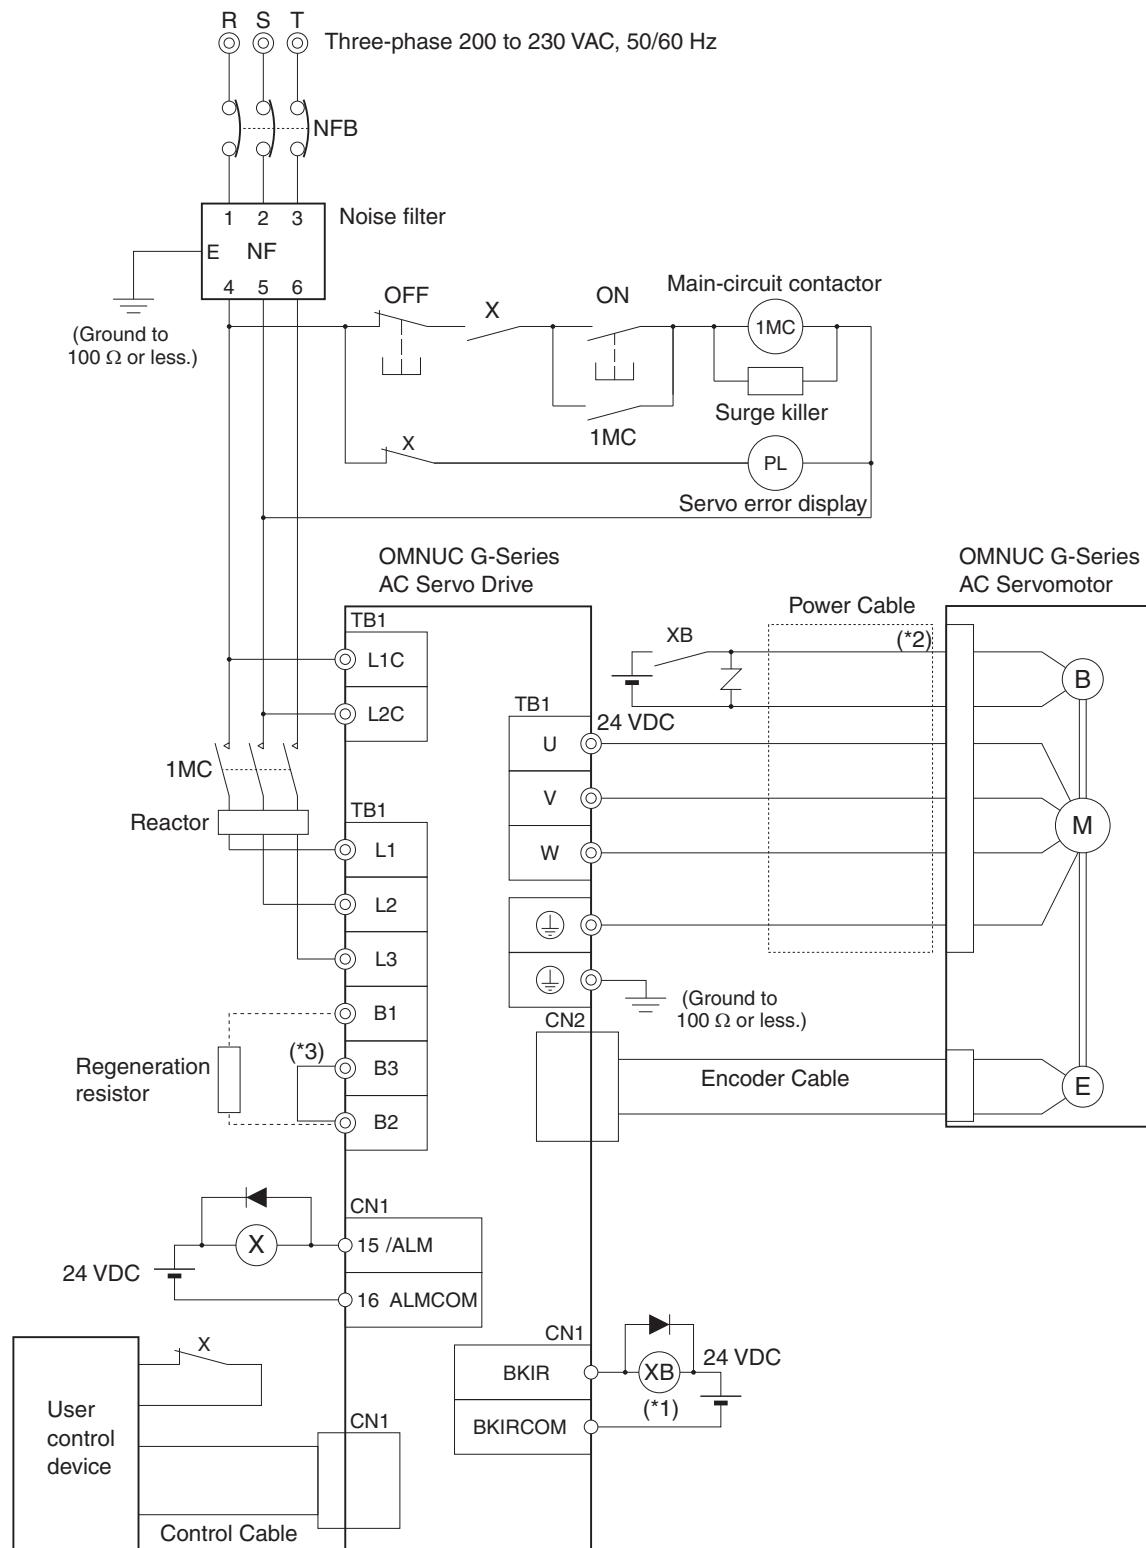


*1. Recommended relay: MY Relay (24 V), by OMRON. For example, the MY2 Relay's rated inductive load is 2 A at 24 VDC and applicable to all G-Series Servomotors with brakes.

*2. The brake is not affected by the polarity of the power supply.

*3. Connect B2-B3 for the models with a built-in regeneration resistor [G□08H(-ML2) to G□15H(-ML2)].

If the amount of regeneration is large, disconnect B2-B3 and connect an External Regeneration Resistor to B1-B2.

R88D-G□75H(-ML2)

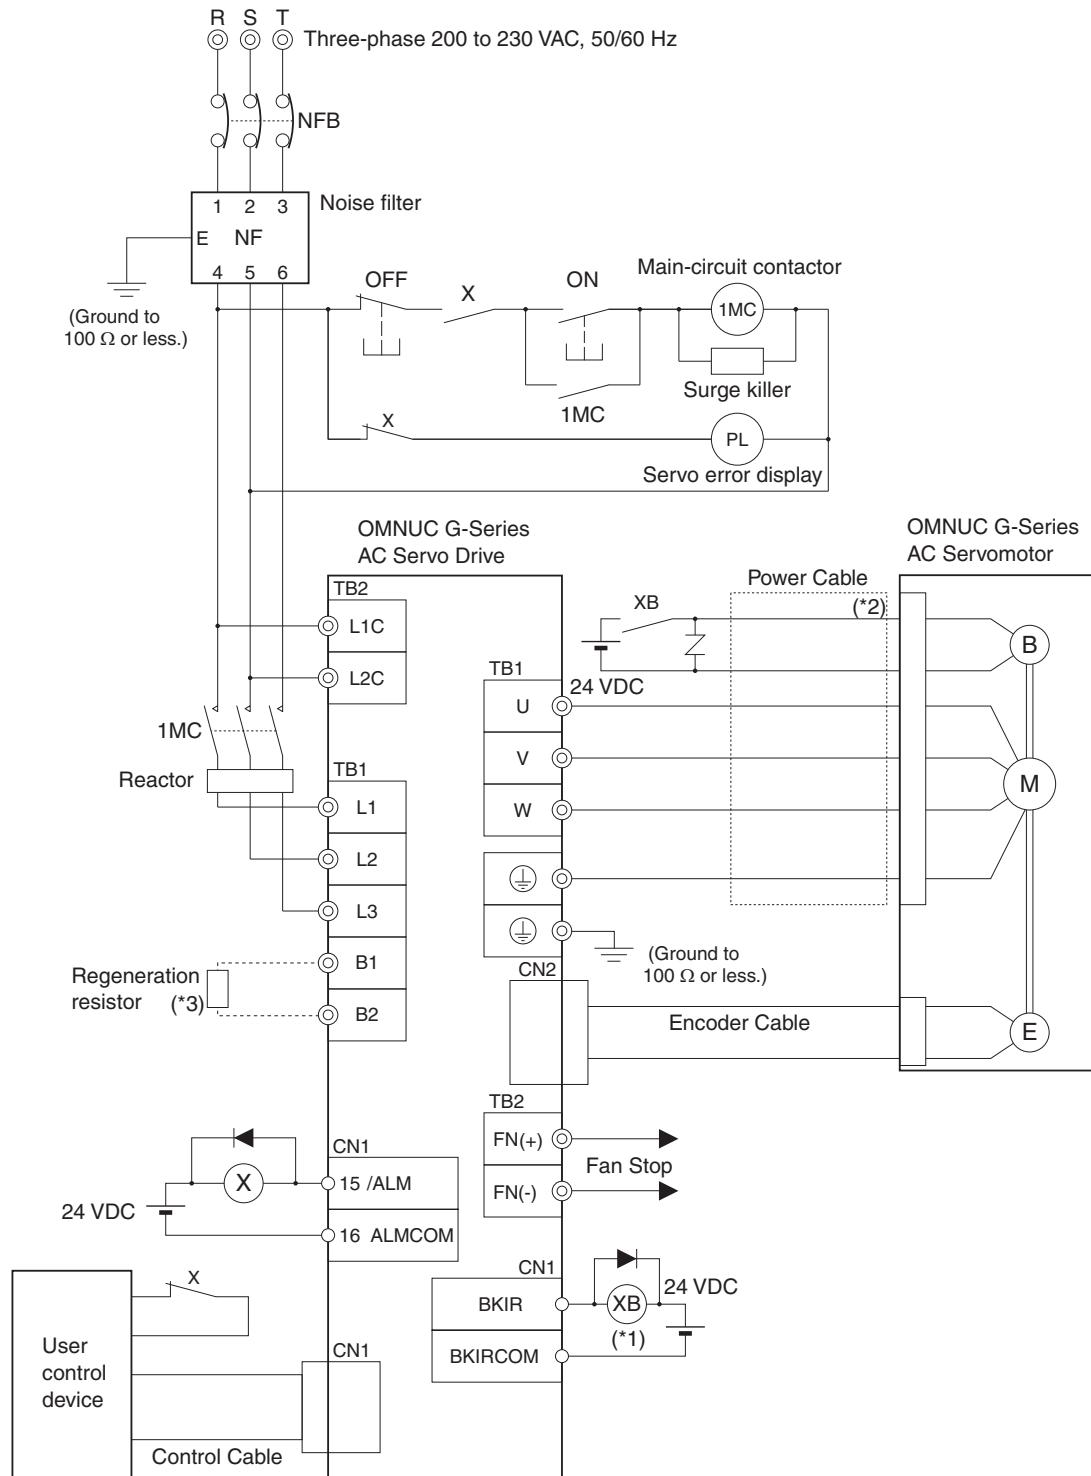

*1. Recommended relay: MY Relay (24 V), by OMRON. For example, the MY2 Relay's rated inductive load is 2 A at 24 VDC and applicable to all G-Series Servomotors with brakes.

*2. The brake is not affected by the polarity of the power supply.


*3. The model G□75H(-ML2) does not have a built-in regeneration resistor.

If the amount of regeneration is large, an External Regeneration Resistor must be connected to B1-B2.

I/O Circuit Diagrams

● Control Input Circuits

- Speed Command/Torque Command Input (For R88D-GT only)

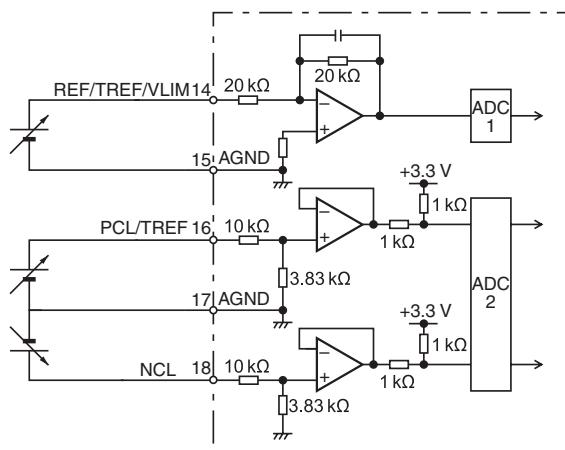


- The maximum allowable input voltage is ± 10 V for each input. The VR must be $2\text{ k}\Omega$ with B characteristics and $1/2$ W minimum. R must be $200\text{ }\Omega$ and $1/2$ W minimum.

- Position Command Pulse Input (Photocoupler Input) (For R88D-GT)


Line Driver Input (500 kpps Maximum)

(+CW:3, -CW:4, +CCW:5, -CCW:6)

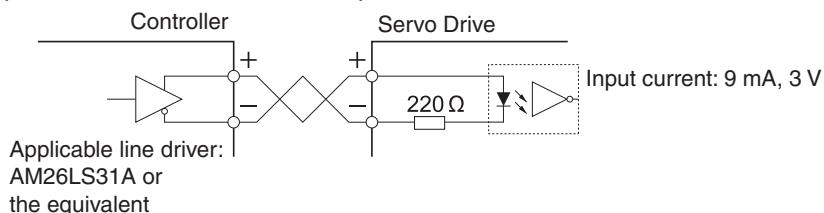


Open-collector Input

- External 24-V power supply without a current-limiting resistor (200 kpps maximum)
(+24VCW: 1, -CW: 4, +24VCCW: 2, -CCW: 6)

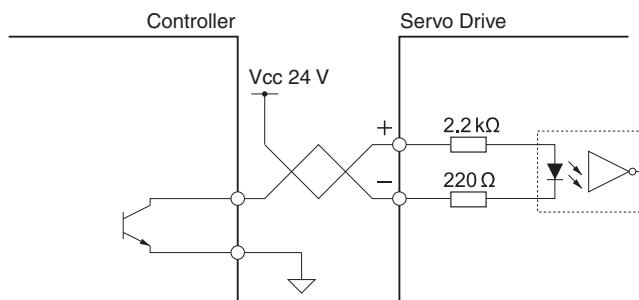

- External control power supply (200 kpps maximum)
(+CW: 3, -CW: 4, +CCW: 5, -CCW: 6)

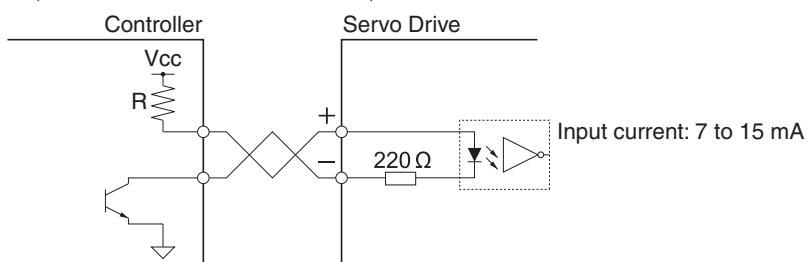

- Select a resistance R value so that the input current will be from 7 to 15 mA. Refer to the following table.

VCC	R
24 V	$2\text{ k}\Omega$ ($1/2$ W)
12 V	$1\text{ k}\Omega$ ($1/2$ W)

• Sequence Input

External power supply:


12 VDC ±5%

24 VDC ±5%

Power supply capacity:

50 mA min. (per Unit)


Minimum ON time:
40 ms

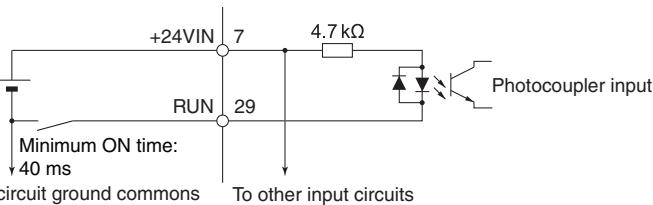

Signal Levels
ON level: 10 V min.
OFF level: 3 V max.

• Sensor Input (For R88D-GT)

Sensor ON Input ABS

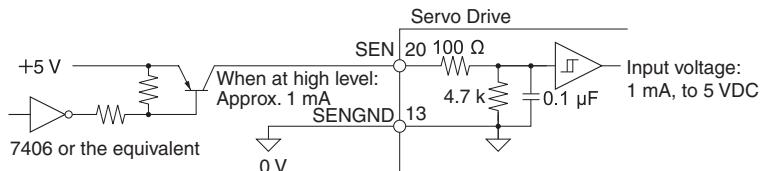


Signal Levels
High level: 4 V min.
Low level: 0.8 V max.


- A PNP transistor is recommended.

● Control Output Circuits


• Position Feedback Output (For R88D-GT)

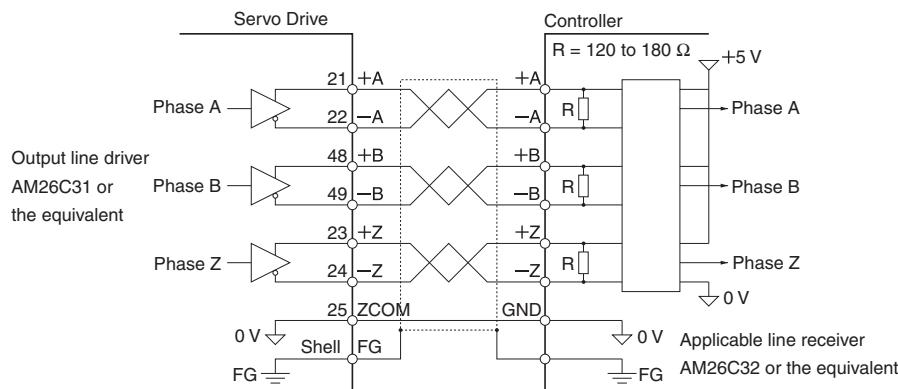

• Phase-Z Output (Open-collector Output) (For R88D-GT)

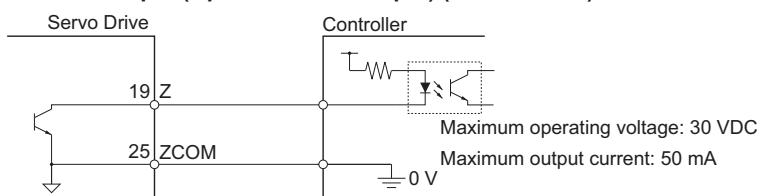


• Sequence Output

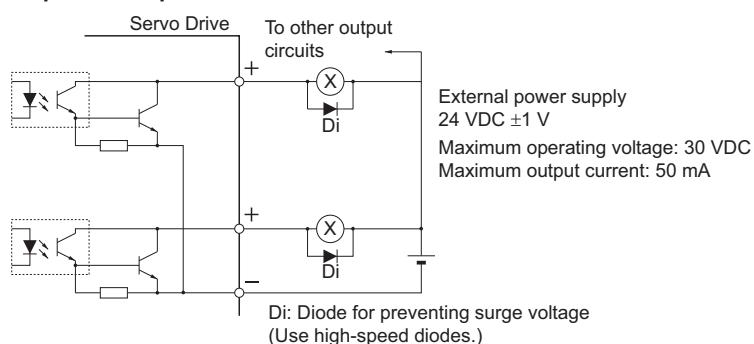

Di: Diode for preventing surge voltage
(Use high-speed diodes.)

Components and Functions

● Servo Drive Part Names (For R88D-GT)

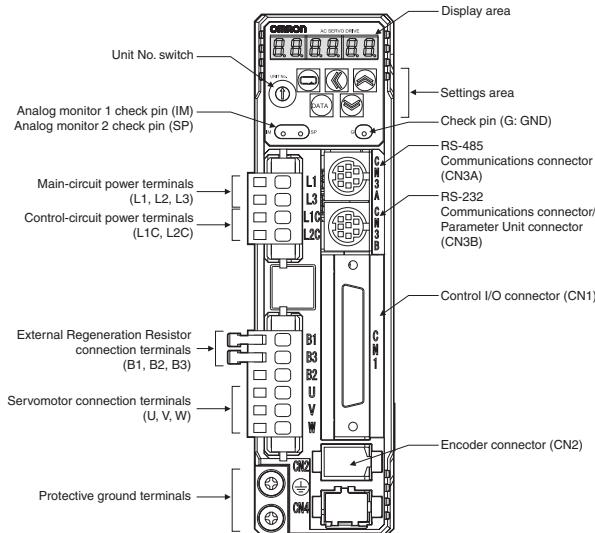

● Main Circuit Connector (CNA)

Symbol	Name
L1	
L2	Main circuits power supply input
L3	
L1C	
L2C	Control circuit power supply input

● Servomotor Connector (CNB)

Symbol	Name
B1	
B2	External Regeneration Resistor connection terminals
B3	
U	
V	
W	
(\ominus)	
(\ominus)	Frame ground

● Display Area

A 6-digit 7-segment LED display shows the Servo Drive status, alarm codes, parameters, and other information.

● Check Pins (IM, SP, and G)

The actual motor speed, command speed, torque, and number of accumulated pulses can be measured based on the analog voltage level by using an oscilloscope. The type of signal to output and the output voltage level are set in the SP Selection (Pn07) and IM Selection (Pn08) parameters.

● Unit No. Switch

The Servo Drive number in serial communications is set to a value from 0 to F. This number is used to identify which Servo Drive the computer is accessing in RS-232/485 communications between multiple Servo Drives and a computer.

● CN1 Control Inputs

Pin No.	Symbol	Name
1	+24VCW	24-V Open-collector Input for Command Pulse
2	+24VCCW	24-V Open-collector Input for Command Pulse
3	+CW/PULS/FA	Reverse Pulses Input/ Feed Pulses Input, or 90° Phase Difference Pulse Input (Phase A)
4	-CW/PULS/FA	
5	+CCW/SIGN/FB	Forward Pulse Input/ Direction Signal, or 90° Phase Difference Pulse Input (Phase B)
6	-CCW/SIGN/FB	
7	+24VIN	12 to 24-VDC Power Supply Input
8	NOT	Reverse Drive Prohibit Input
9	POT	Forward Drive Prohibit Input
	REF	Speed Command Input
14	TREF	Torque Command Input
	VLIM	Speed Limit Input
15	AGND	Analog Input Ground
	PCL	Forward Torque Limit Input
16	TREF	Torque Command Input
17	AGND	Analog Input Ground
18	NCL	Reverse Torque Limit Input
20	SEN	Sensor ON Input
13	SENGND	
	VZERO	Zero Speed Designation Input
26	DFSEL	Vibration Filter Switch
	PNSEL	Speed Command Rotation Direction Switch
27	GSEL	Gain Switch
	TLSEL	Torque Limit Switch
28	GESEL	Electronic Gear Switch
	VSEL3	Internally Set Speed Selection 3
29	RUN	RUN Command
30	ECRST	Deviation Counter Reset Input
	VSEL2	Internally Set Speed Selection 2
31	RESET	Alarm Reset Input
32	TVSEL	Control Mode Switch Input
33	IPG	Pulse Prohibit Input
	VSEL1	Internally Set Speed Selection 1
42	BAT	Backup Battery Input
43	BATGND	
44	+CWLD	Reverse Pulse (input for line driver only)
45	-CWLD	
46	+CCWLD	Forward Pulse (input for line driver only)
47	-CCWLD	

● CN1 Control Outputs

Pin No.	Symbol	Name
10	BKIRCOM	Brake Interlock Output
11	BKIR	
12	OUTM1	General-purpose Output 1
19	Z	Phase-Z Output (open collector)
25	ZCOM	Phase-Z Output (open collector) common
21	+A	Encoder Phase-A + Output
22	-A	Encoder Phase-A – Output
48	-B	Encoder Phase-B – Output
49	+B	Encoder Phase-B + Output
23	+Z	Encoder Phase-Z + Output
24	-Z	Encoder Phase-Z – Output
35	READY	
34	READYCOM	Servo Ready Output
37	/ALM	
36	ALMCOM	Alarm Output
39	INP	
38	INPCOM	Positioning Completed Output
39	TGON	
38	TGONCOM	Servomotor Rotation Speed Detection Output
40	OUTM2	General-purpose Output 2
41	COM	General-purpose Output Common
Shell	FG	Frame Ground

● Protective Functions

Error detection
Control power supply undervoltage
Overspeed
Undervoltage
Overcurrent
Overheating
Overload
Regeneration overload
Encoder communications error
Encoder communications data error
Position deviation exceeded
Overspeed
Command pulse multiplying error
Overrun limit error
EEPROM parameter error
EEPROM check code error
Drive prohibit input
Excessive analog input
Absolute encoder system down error
Absolute encoder counter overflow error
ABS
Absolute encoder overspeed error
ABS
Absolute encoder one-turn counter error
ABS
Absolute encoder multi-turn counter error
ABS
Absolute encoder status error
ABS
Encoder phase Z error
Encoder PS signal error
PCL input exceeded
NCL input exceeded
Motor automatic recognition error
CPU error
Encoder error

● Encoder Connector Specifications (CN2)

Pin No.	Symbol	Name
1	E5V	Encoder power supply +5 V
2	E0V	Encoder power supply GND
3	BAT+	Battery +
4	BAT-	Battery –
5	PS+	Encoder +phase S input
6	PS-	Encoder –phaseS input
Shell	FG	Shield ground

● Communications Connector Specifications (CN3A)


Pin No.	Symbol	Name
4	GND	Ground
7	B+	
8	A-	RS-485 communications data

● Parameter Unit Connector Specifications (CN3B)

Pin No.	Symbol	Name
3	TXD	RS-232 send data
4	GND	Ground
5	RXD	RS-232 receive data
7	B+	
8	A-	RS-485 communications data

Components and Functions

● Servo Drive Part Names (For R88D-GN□-ML2)

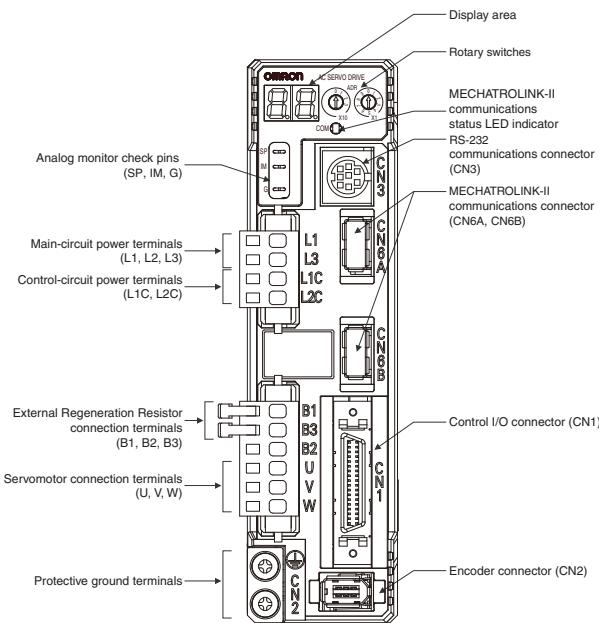

**R88D-GNA5L-ML2/-GN01L-ML2/-GN02L-ML2
R88D-GN04L-ML2/-GN01H-ML2/-GN02H-ML2
R88D-GN04H-ML2/-GN08H-ML2/-GN10H-ML2
R88D-GN15H-ML2**

● Main Circuit Connector (CNA)

Symbol	Name
L1	
L2	Main circuits power supply input
L3	
L1C	
L2C	Control circuit power supply input

● Servomotor Connector (CNB)

Symbol	Name
B1	
B2	External Regeneration Resistor connection terminals
B3	
U	
V	
W	Servomotor connection terminals
(\ominus)	
(\oplus)	Frame ground

● R88D-GN20H-ML2/-GN30H-ML2/-GN50H-ML2

● Main Circuit Terminal Block Specifications

Symbol	Name
L1	Main circuit power supply input
L2	
L3	
L1C	Control circuit power supply input
L2C	
B1	
B2	External Regeneration Resistor connection terminals
B3	
U	
V	Servomotor connection terminals
W	
(\ominus)	
(\oplus)	Frame ground

● R88D-GN75H-ML2

● Main Circuit Terminal Block Specifications (TB1)

Symbol	Name
L1	
L2	Main circuit power supply input
L3	
B1	
B2	External Regeneration Resistor connection terminals
U	
V	Servomotor connection terminals
W	
(\ominus)	
(\oplus)	Frame ground

● Main Circuit Terminal Block Specifications (TB2)

Symbol	Name
L1C	
L2C	Control circuit power supply input
(\ominus)	Frame ground
FN (+)	
FN (-)	Fan Stop Output

● Display Area

A 2-digit 7-segment LED display shows the Servo Drive status, alarm codes, parameters, and other information.

● Analog Monitor Check Pins (SP, IM, and G)

The actual motor speed, command speed, torque, and number of accumulated pulses can be measured based on the analog voltage level by using an oscilloscope.

Set the type of signal to be output and the output voltage level by setting the Speed Monitor (SP) Selection (Pn007) and Torque Monitor (IM) Selection (Pn008).

● MECHATROLINK-II Status LED Indicator

Indicates the communications status of the MECHATROLINK-II.

● Rotary Switches

Sets the node address.

● CN1 Control Input Signals

Pin No.	Symbol	Name
1	+24VIN	12 to 24-VDC Power Supply Input
2	STOP	Emergency Stop Input
3	EXT3	External Latch Signal 3
4	EXT2	External Latch Signal 2
5	EXT1	External Latch Signal 1
6	IN1	External general-purpose Input 1
7	PCL	Forward Torque Limit Input
8	NCL	Reverse Torque Limit Input
19 to 20*	POT	Forward Drive Prohibit Input
	NOT	Reverse Drive Prohibit Input
21	DEC	Origin Proximity Input
22	IN0	External general-purpose Input 0
23	IN2	External general-purpose Input 2
34	BAT	Backup Battery Input ABS
33	BATCOM	

*Forward and reverse rotation over travel input.

● CN1 Control Output Signals

Pin No.	Symbol	Name
15	/ALM	Alarm Output
16	ALMCOM	
29	OUTM2	General-purpose Output 2 (READY)
30	OUTM2COM	
31	OUTM3	General-purpose Output 3 (CLIM)
32	OUTM3COM	
36	OUTM1	General-purpose Output 1 (BKIR)
35	OUTM1COM	

● Encoder Connector Specifications (CN2)

Pin No.	Symbol	Name
1	E5V	Encoder power supply +5 V
2	E0V	Encoder power supply GND
3	BAT+	Battery +
4	BAT-	Battery -
5	PS+	Encoder +phase S Input
6	PS-	Encoder -phase S Input
Shell	FG	Shield ground

● Parameter Unit Connector Specifications (CN3)

Pin No.	Symbol	Name
3	TXD	RS-232 send data
4	GND	Ground
5	RXD	RS-232 receive data

● Protective Functions

Error detection
Control power supply undervoltage
Oversupply
Undervoltage
Overcurrent
Overheating
Overload
Regeneration overload
Encoder communications error
Encoder communications data error
Deviation counter overflow
Overspeed
Command error
Internal deviation counter overflow
Overrun limit error
Parameter error
Parameter corruption
Drive prohibit input error
Absolute encoder system down error ABS
Absolute encoder counter overflow error ABS
Absolute encoder overspeed error ABS
Absolute encoder one-turn counter error ABS
Absolute encoder multi-turn counter error ABS
Absolute encoder status error ABS
Encoder phase Z error
Encoder PS signal error
Node address setting error
Communications error
Transmission cycle error
Watchdog data error
Emergency stop input error
Transmission cycle setting error
SYNC command error
Parameter setting error
Servomotor non-conformity

Dimensions

(Unit: mm)


● Servo Drives

- Single-phase 100 VAC (50 to 100 W)

R88D-GTA5L
R88D-GT01L

- Single-phase 200 VAC (50 to 200 W)

R88D-GT01H
R88D-GT02H

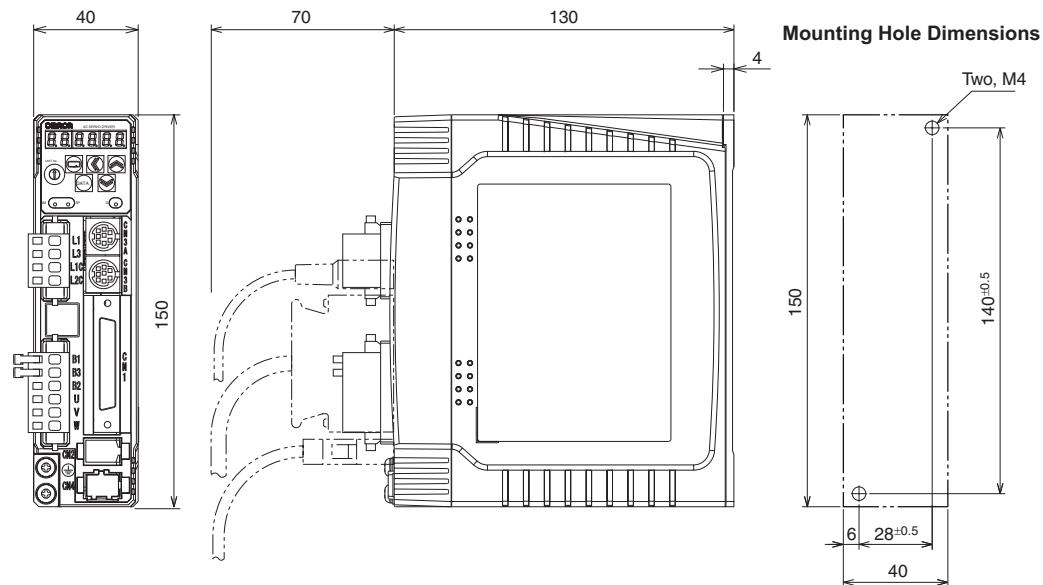


- Single-phase 100 VAC (200 W)


R88D-GT02L

- Single-phase 200 VAC (400 W)


R88D-GT04H

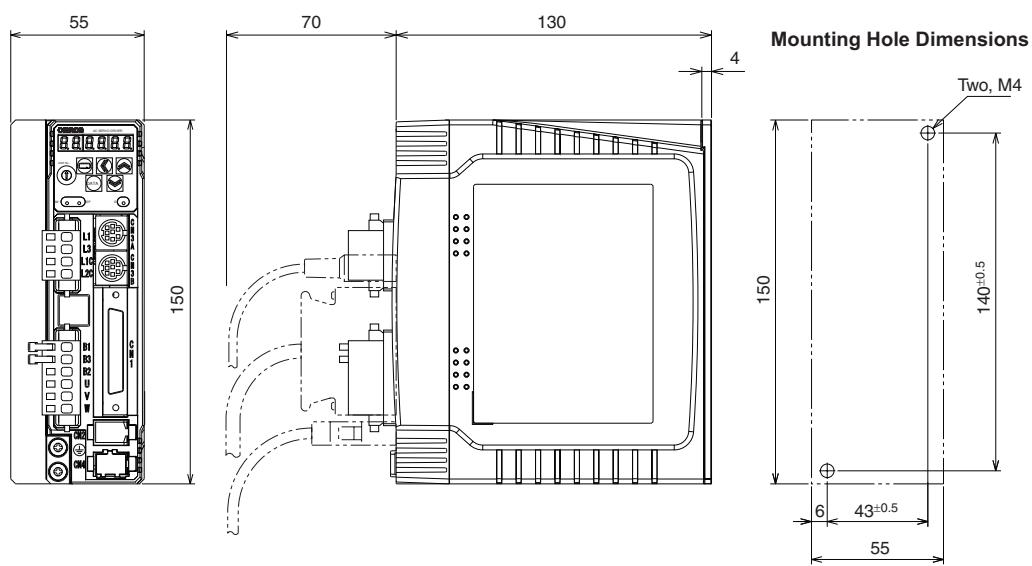


- Single-phase 100 VAC (400 W)
R88D-GT04L
- Single-phase/Three-phase 200 VAC (750 W)
R88D-GT08H

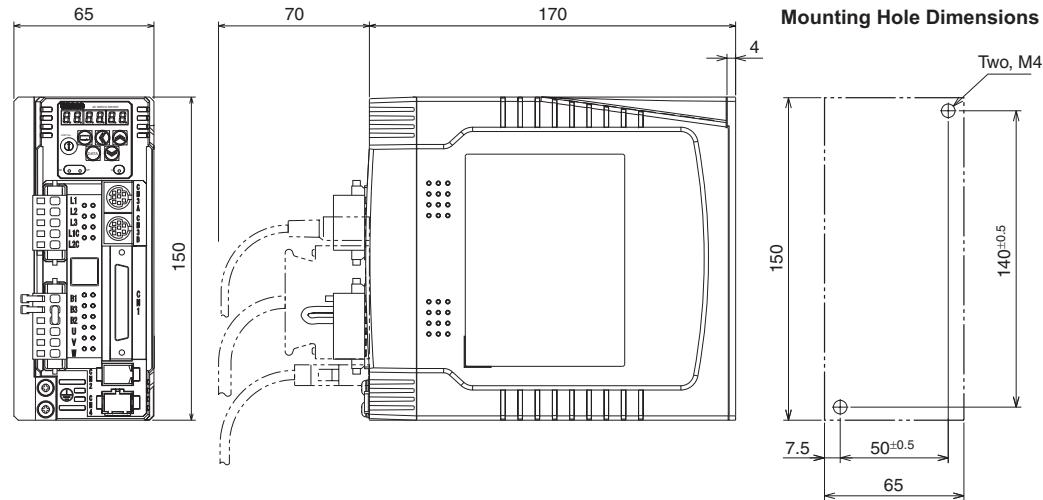


- Single-phase/Three-phase 200 VAC (900 W to 1.5 kW)
R88D-GT10H
R88D-GT15H

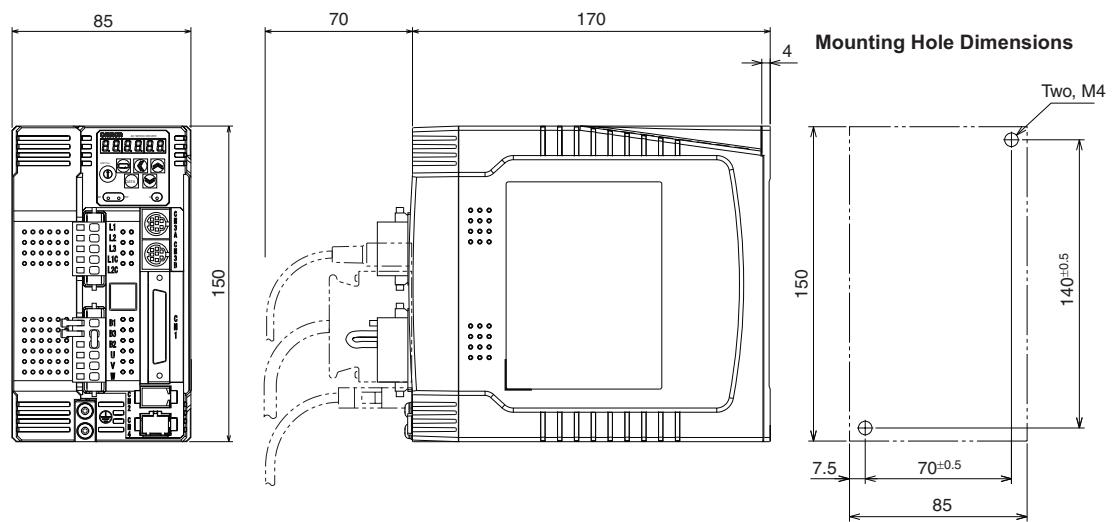



- Three-phase 200 VAC (2 kW)
R88D-GT20H

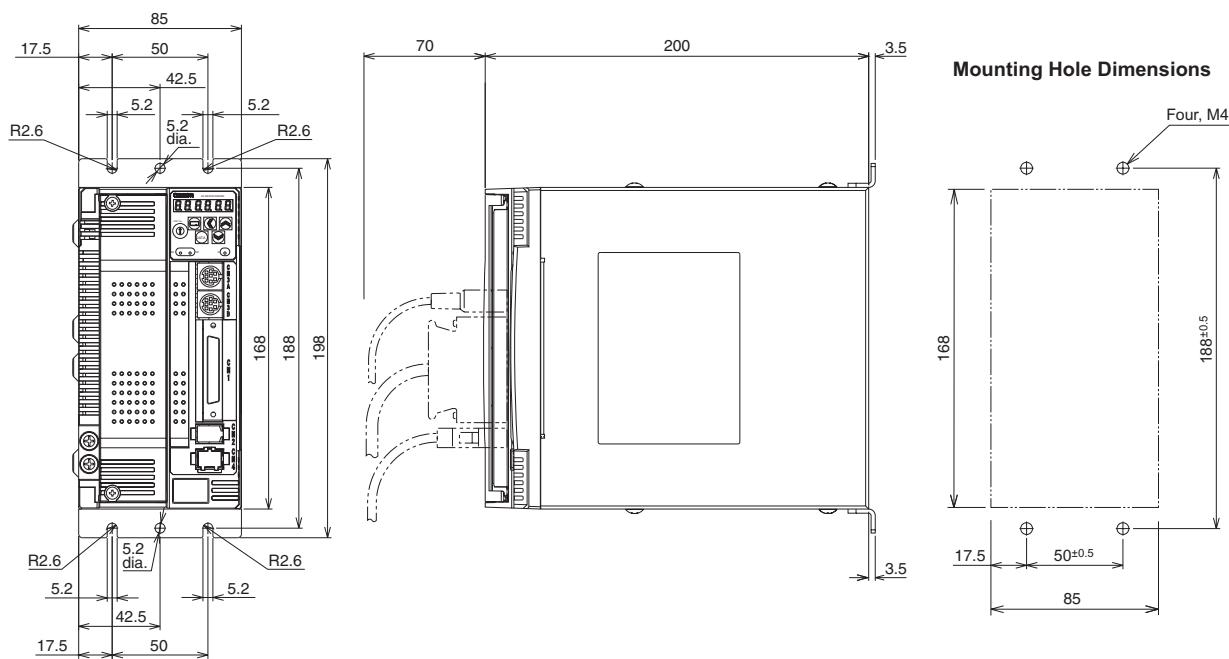



- Three-phase 200 VAC (2 to 5 kW)
R88D-GT30H/-GT50H

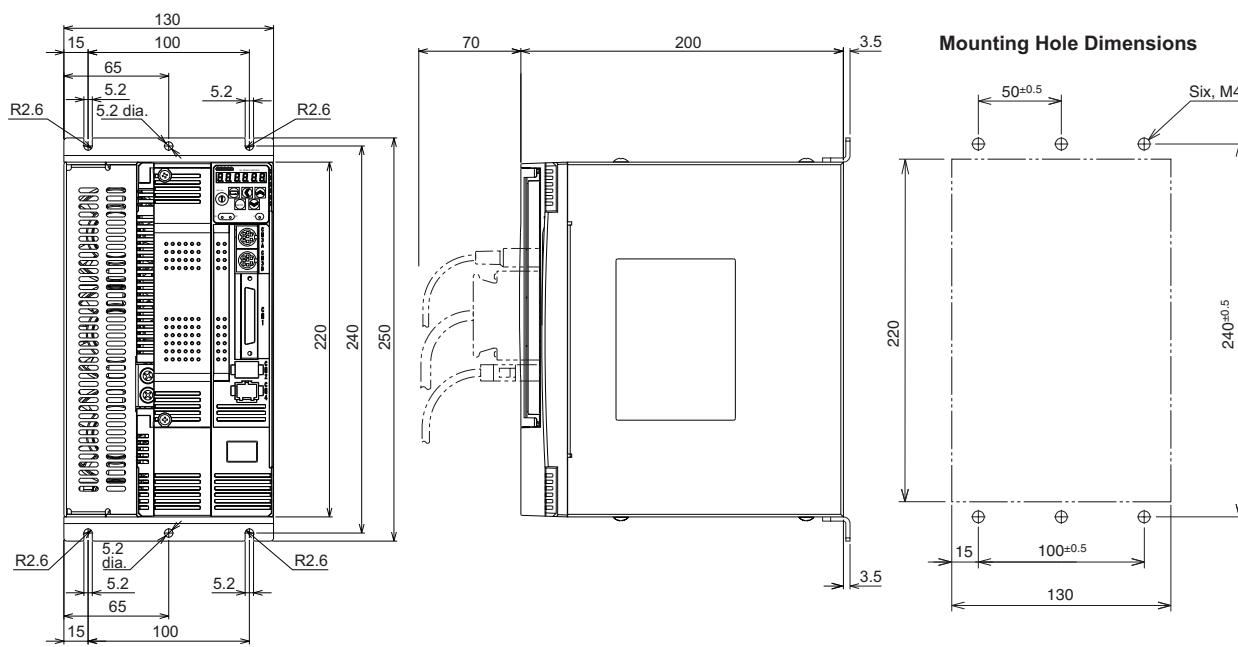

- Three-phase 200 VAC (7.5 kW)
R88D-GT75H

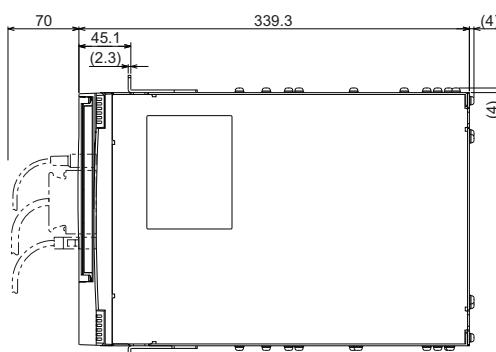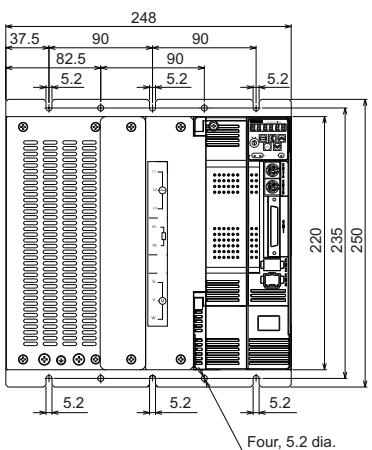

Mounting Hole Dimensions

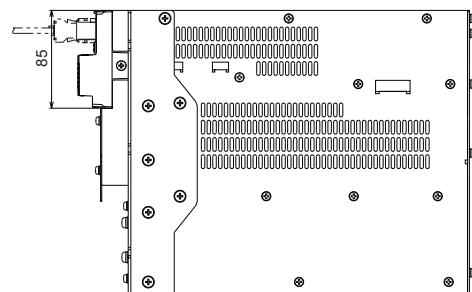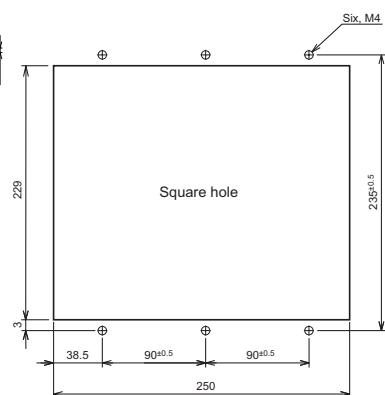

- Single-phase 100 VAC (50 to 100 W)


R88D-GNA5L-ML2

R88D-GN01L-ML2

- Single-phase 200 VAC (50 to 200 W)

R88D-GN01H-ML2

R88D-GN02H-ML2

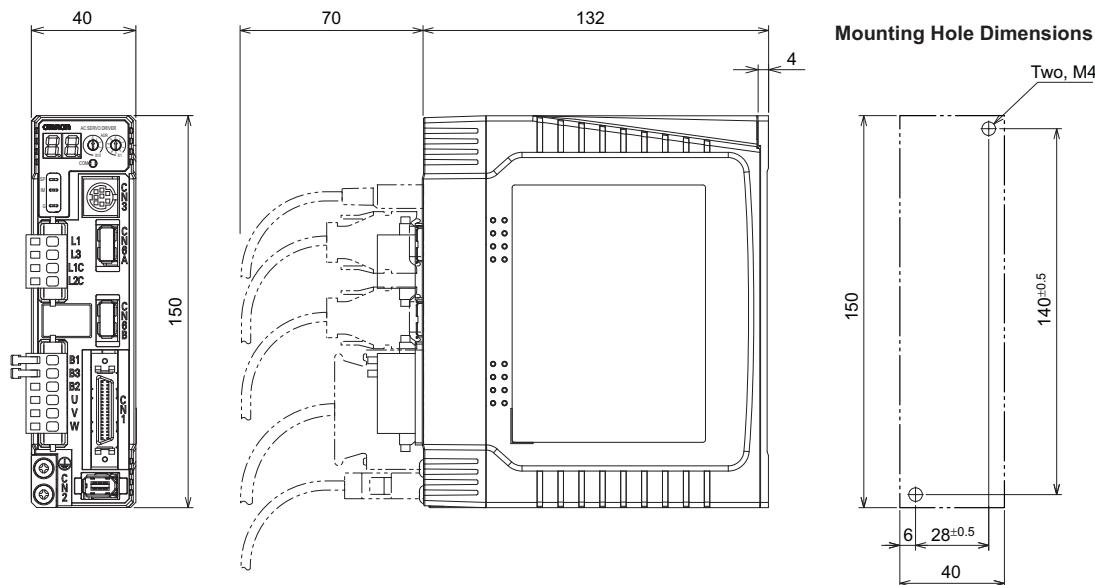


- Single-phase 100 VAC (200 W)


R88D-GN02L-ML2

- Single-phase 200 VAC (400 W)


R88D-GN04H-ML2

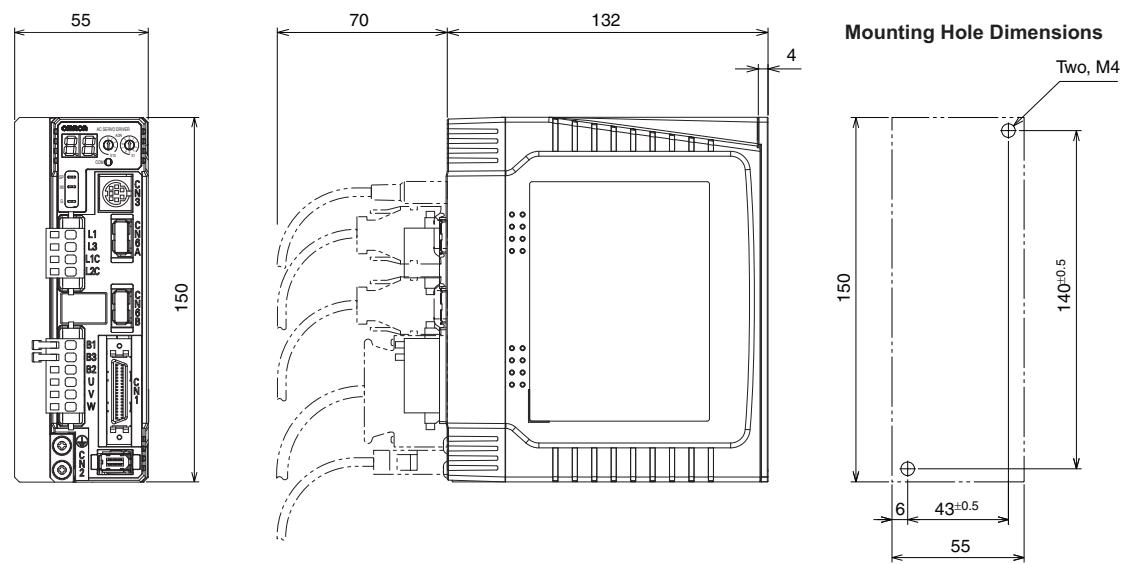


- Single-phase 100 VAC (400 W)
R88D-GN04L-ML2
- Single-phase/Three-phase 200 VAC (750 W)
R88D-GN08H-ML2

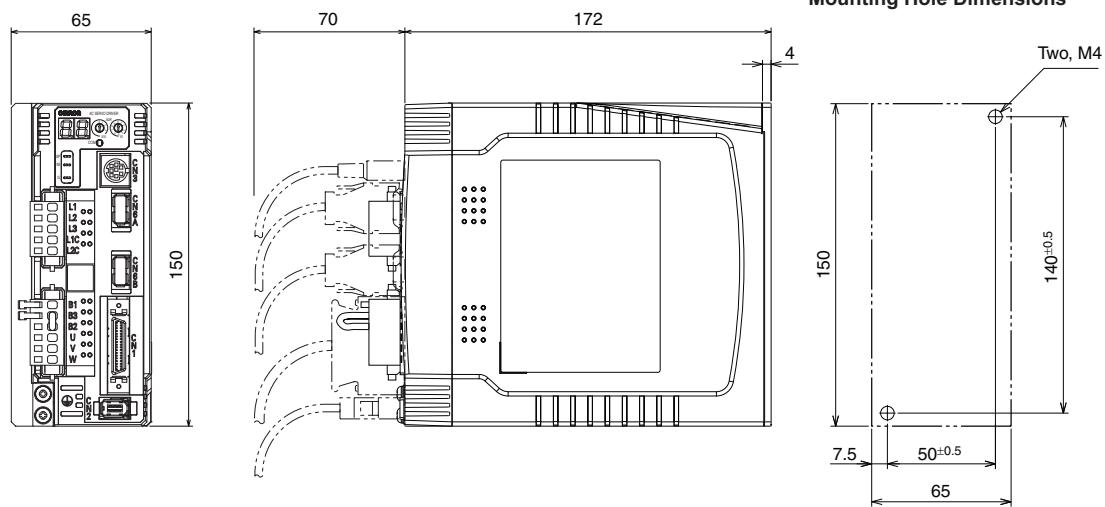


- Single-phase/Three-phase 200 VAC (900 W to 1.5 kW)
R88D-GN10H-ML2
R88D-GN15H-ML2

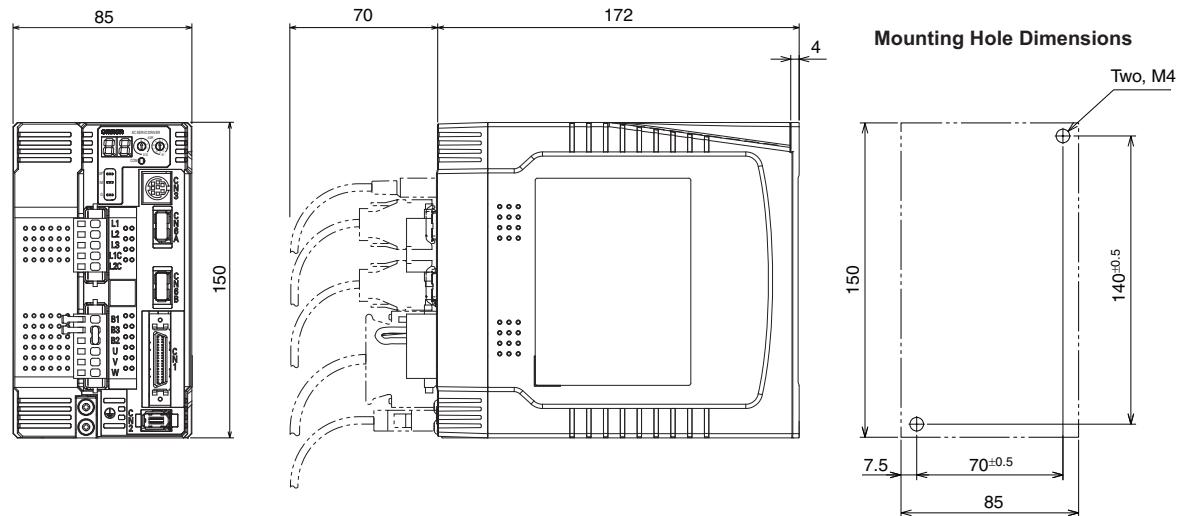

- Three-phase 200 VAC (2 kW)
R88D-GN20H-ML2

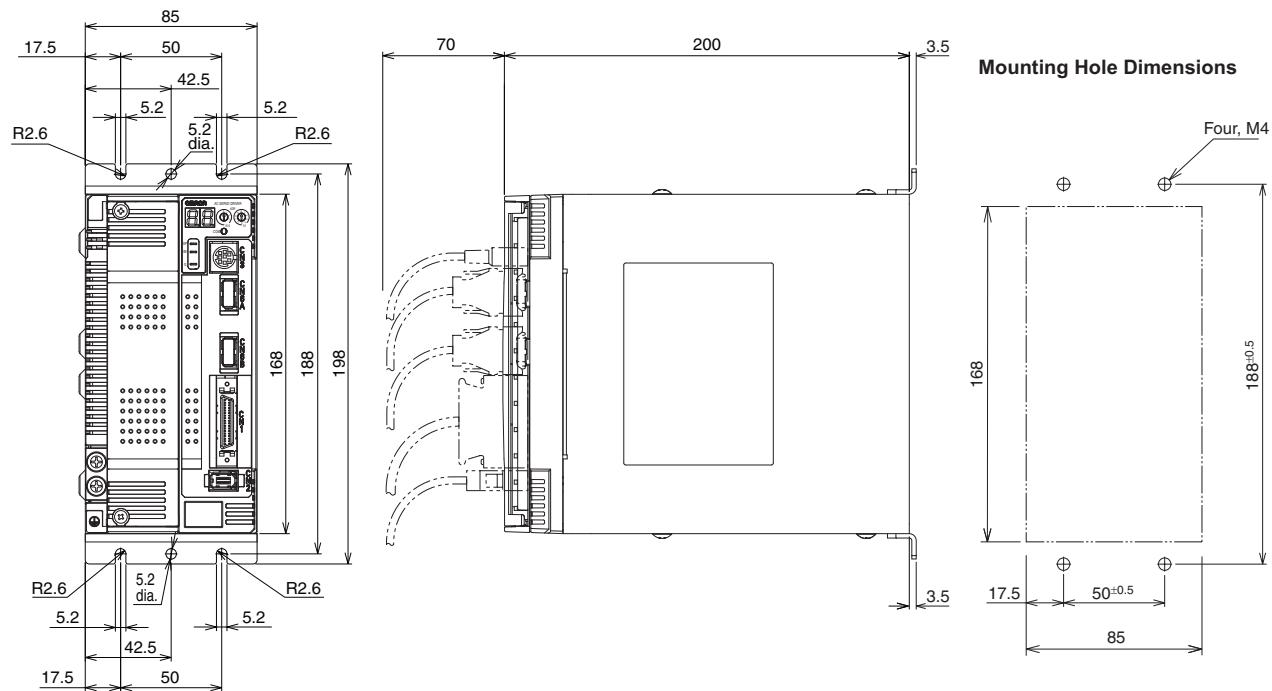



- Three-phase 200 VAC (2 to 5 kW)
R88D-GN30H-ML2
R88D-GN50H-ML2

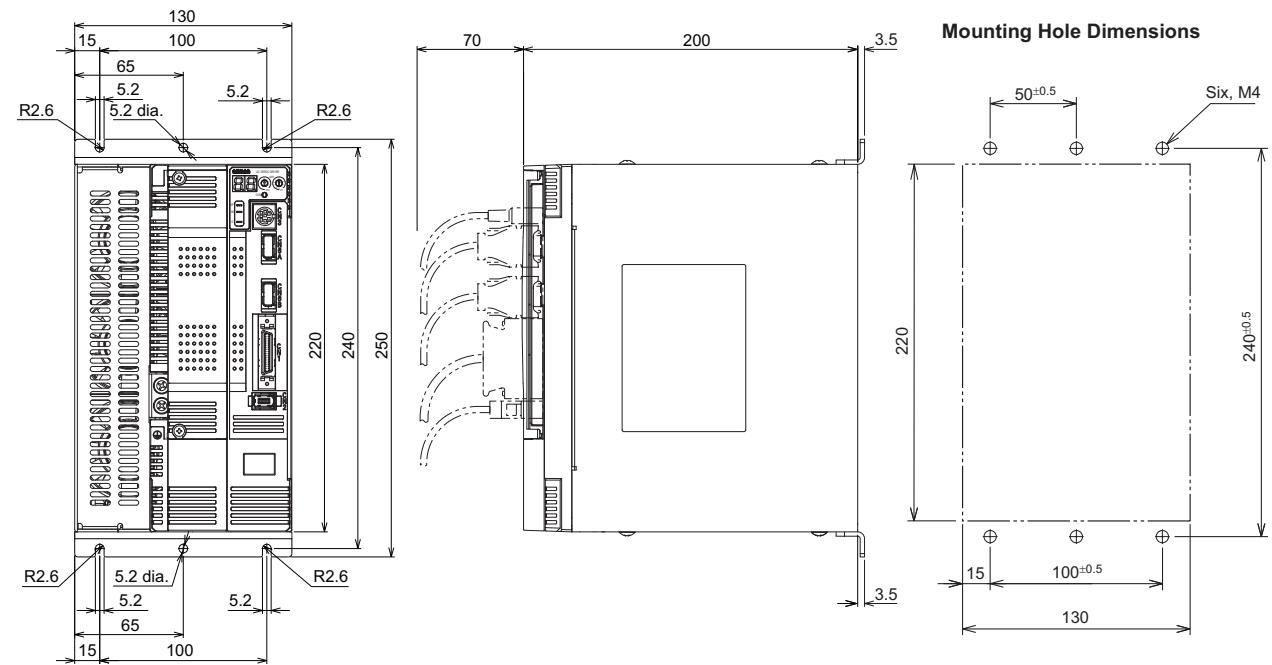



- Three-phase 200 VAC (7.5 kW)

R88D-GN75H-ML2

Front Panel Mounting (Using Mounting Brackets)

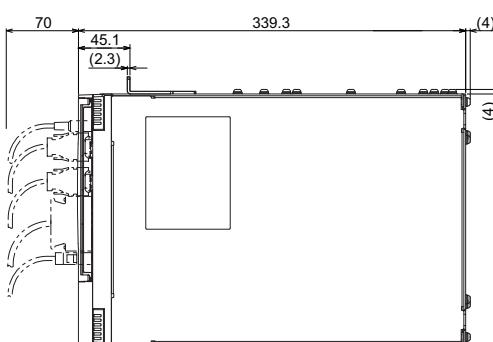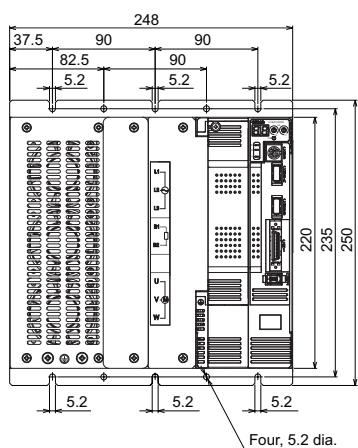

Mounting Hole Dimensions

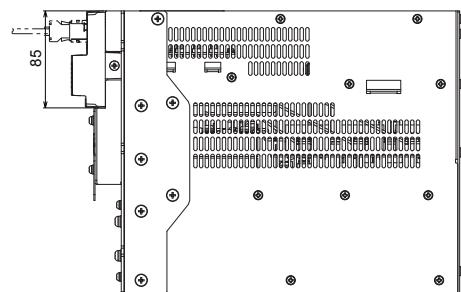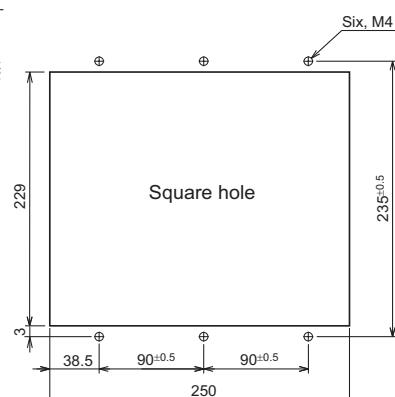

—

● Servomotors

3,000-r/min Cylindrical Servomotors


- 50 W/100 W

INC	ABS
R88M-G05030H (-S2)	R88M-G05030T (-S2)
R88M-G10030L (-S2)	R88M-G10030S (-S2)
R88M-G10030H (-S2)	R88M-G10030T (-S2)
R88M-G05030H-B (S2)	R88M-G05030T-B (S2)
R88M-G10030L-B (S2)	R88M-G10030S-B (S2)
R88M-G10030H-B (S2)	R88M-G10030T-B (S2)

Model	LL	LN
R88M-G05030□	72	26.5
R88M-G10030□	92	46.5
R88M-G05030□-B	102	26.5
R88M-G10030□-B	122	46.5

*The empty box in the L, H, L, T or S.

Note: The standard models have a straight shaft. A model with a key and tap is indicated by adding "S2" to the end of the model number.

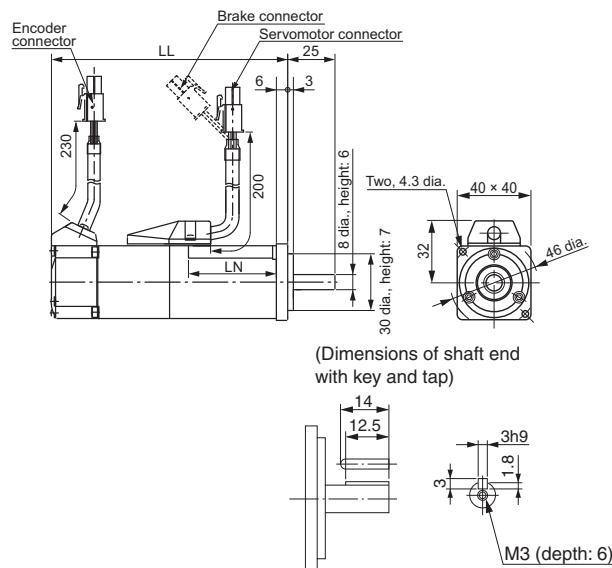


- 200 W/400 W/750 W

INC	ABS
R88M-G20030L (-S2)	R88M-G20030S (-S2)
R88M-G40030L (-S2)	R88M-G40030S (-S2)
R88M-G20030H (-S2)	R88M-G20030T (-S2)
R88M-G40030H (-S2)	R88M-G40030T (-S2)
R88M-G75030H (-S2)	R88M-G75030T (-S2)
R88M-G20030L-B (S2)	R88M-G20030S-B (S2)
R88M-G40030L-B (S2)	R88M-G40030S-B (S2)
R88M-G20030H-B (S2)	R88M-G20030T-B (S2)
R88M-G40030H-B (S2)	R88M-G40030T-B (S2)
R88M-G75030H-B (S2)	R88M-G75030T-B (S2)

Model	LL	LR	S	D1	D2	C	G	Z	KL1	QK	b	h	M	t1	L
R88M-G20030□	79.5	30	11	70	50	60	6.5	4.5	43	18	4h9	4	M4	2.5	8
R88M-G40030□	99		14		70	80	8	6		22.5	5h9	5		3	10
R88M-G75030□	112.2	35	19	90	70	80	8	6	53	22	6h9	6	M5	3.5	
R88M-G20030□-B	116		11	70	50	60	6.5	4.5		18	4h9	4		M4	2.5
R88M-G40030□-B	135.5	30	14		70	80	8	6	43	22.5	5h9	5	M5	3	10
R88M-G75030□-B	149.2		19	90	70	80	8	6		22	6h9	6		3.5	

*The empty box in the L, H, L, T or S.


Note: The standard models have a straight shaft. A model with a key and tap is indicated by adding "S2" to the end of the model number.

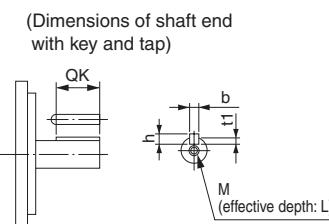

• 1 kW/1.5 kW/2 kW

INC

R88M-G1K030H-S2
R88M-G1K530H-S2
R88M-G2K030H-S2
R88M-G1K030H-B S2
R88M-G1K530H-B S2
R88M-G2K030H-B S2

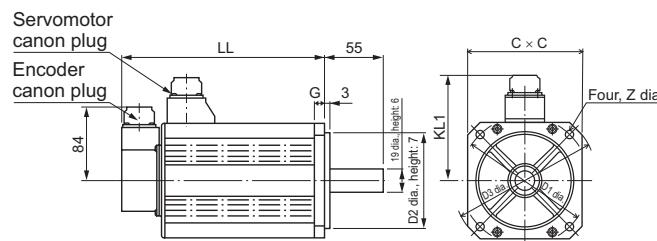

(Dimensions of shaft end with key and tap)

ABS

R88M-G1K030T (-S2)
R88M-G1K530T (-S2)
R88M-G2K030T (-S2)
R88M-G1K030T-B (S2)
R88M-G1K530T-B (S2)
R88M-G2K030T-B (S2)

Model	LL	D1	D2	C	D3	G	KL1	Z
R88M-G1K030□	175	100	80	90	120	7	98	6.6
R88M-G1K530□	180			115	95	100	135	10
R88M-G2K030□	205			200	100	80	90	120
R88M-G1K030□-B	200	100	80	90	120	7	98	6.6
R88M-G1K530□-B	205			205	115	95	100	135
R88M-G2K030□-B	230			230			103	9

Note: The standard models have a straight shaft.

A model with a key and tap is indicated by adding "S2" to the end of the model number.

• 3 kW


INC

R88M-G3K030H-S2
R88M-G3K030H-B S2

ABS

R88M-G3K030T (-S2)
R88M-G3K030T-B (S2)

Model	LL
R88M-G3K030□	217
R88M-G3K030□-B	242

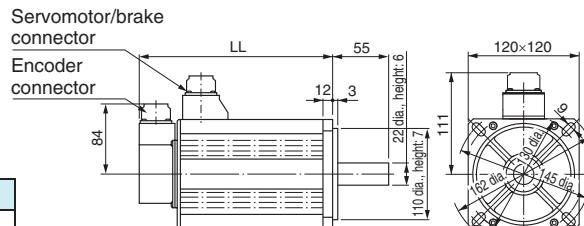

(Dimensions of the shaft end with key and tap)

Note: The standard models have a straight shaft.

A model with a key and tap is indicated by adding "S2" to the end of the model number.

• 4 kW/5 kW


INC

R88M-G4K030H-S2
R88M-G5K030H-S2
R88M-G4K030H-B S2
R88M-G5K030H-B S2

ABS

R88M-G4K030T (-S2)
R88M-G5K030T (-S2)
R88M-G4K030T-B (S2)
R88M-G5K030T-B (S2)

Model	LL
R88M-G4K030□	240
R88M-G5K030□	280
R88M-G4K030□-B	265
R88M-G5K030□-B	305

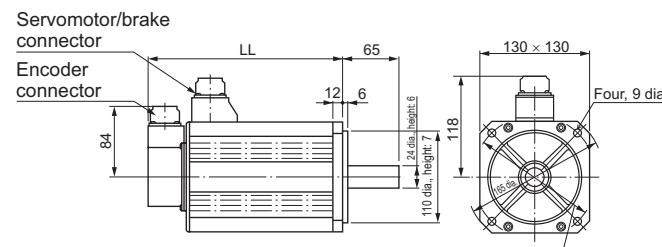

(Dimensions of shaft end with key and tap)

Note: The standard models have a straight shaft.

A model with a key and tap is indicated by adding "S2" to the end of the model number.

3,000-r/min Flat Servomotors

- 100 W/200 W/400 W

INC


R88M-GP10030L (-S2)	R88M-GP10030S (-S2)
R88M-GP20030L (-S2)	R88M-GP20030S (-S2)
R88M-GP40030L (-S2)	R88M-GP40030S (-S2)
R88M-GP10030H (-S2)	R88M-GP10030T (-S2)
R88M-GP20030H (-S2)	R88M-GP20030T (-S2)
R88M-GP40030H (-S2)	R88M-GP40030T (-S2)
R88M-GP10030L-B (S2)	R88M-GP10030S-B (S2)
R88M-GP20030L-B (S2)	R88M-GP20030S-B (S2)
R88M-GP40030L-B (S2)	R88M-GP40030S-B (S2)
R88M-GP10030H-B (S2)	R88M-GP10030T-B (S2)
R88M-GP20030H-B (S2)	R88M-GP20030T-B (S2)
R88M-GP40030H-B (S2)	R88M-GP40030T-B (S2)

ABS

R88M-GP10030S-B (S2)
R88M-GP20030S-B (S2)
R88M-GP40030S-B (S2)
R88M-GP10030T-B (S2)
R88M-GP20030T-B (S2)
R88M-GP40030T-B (S2)

Model	LL	LR	S	D1	D2	C	F	G	KL1	Z	QK	b	h	t1	M	L
R88M-GP10030L	60.5	25	8	70	50	60	3	7	43	4.5	12.5	3h9	3	1.8	M3	6
R88M-GP10030H																
R88M-GP10030S	87.5	30	11	90	70	80	5	8	53	5.5	18	4h9	4	2.5	M4	8
R88M-GP10030T																
R88M-GP20030L	67.5	30	14	90	70	80	5	8	53	5.5	22.5	5h9	5	3.0	M5	10
R88M-GP20030H																
R88M-GP40030L	82.5	25	8	70	50	60	3	7	43	4.5	12.5	3h9	3	1.8	M3	6
R88M-GP40030H																
R88M-GP40030S	109.5	111.5	14	90	70	80	5	8	53	5.5	22.5	5h9	5	3.0	M5	10
R88M-GP40030T																
R88M-GP10030L-B	84.5	25	8	70	50	60	3	7	43	4.5	12.5	3h9	3	1.8	M3	6
R88M-GP10030H-B																
R88M-GP10030S-B	111.5	30	11	90	70	80	5	8	53	5.5	18	4h9	4	2.5	M4	8
R88M-GP10030T-B																
R88M-GP20030L-B	100	30	14	90	70	80	5	8	53	5.5	18	4h9	4	2.5	M4	8
R88M-GP20030H-B																
R88M-GP20030S-B	127	115	11	90	70	80	5	8	53	5.5	22.5	5h9	5	3.0	M5	10
R88M-GP20030T-B																
R88M-GP40030L-B	115	142	14	90	70	80	5	8	53	5.5	22.5	5h9	5	3.0	M5	10
R88M-GP40030H-B																

Note: The standard models have a straight shaft. A model with a key and tap is indicated by adding "S2" to the end of the model number.

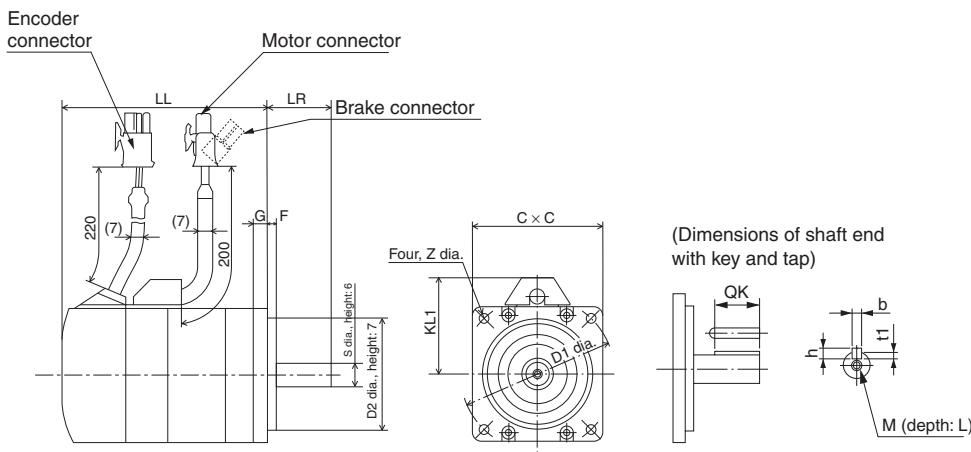

2,000-r/min Cylindrical Servomotors


- 200 VAC: 1 kW/1.5 kW

INC

R88M-G1K020H-S2
R88M-G1K520H-S2
R88M-G1K020H-B S2
R88M-G1K520H-B S2

ABS

R88M-G1K020T (-S2)
R88M-G1K520T (-S2)
R88M-G1K020T-B (S2)
R88M-G1K520T-B (S2)

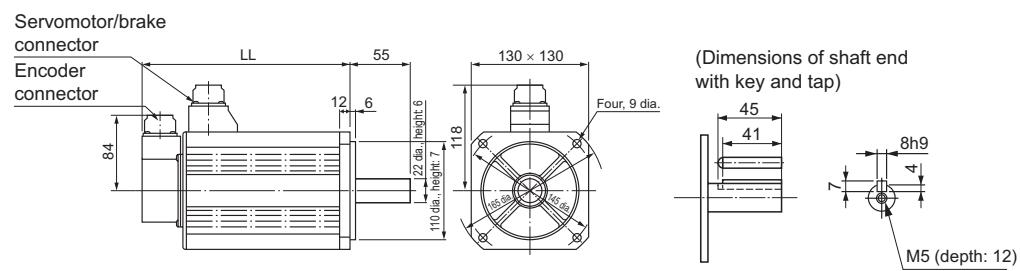

Model	LL
R88M-G1K020□	150
R88M-G1K520□	175
R88M-G1K020□-B	
R88M-G1K520□-B	200

Note: The standard models have a straight shaft.

A model with a key and tap is indicated by adding "S2" to the end of the model number.


- 200 VAC: 2 kW/3 kW

INC

R88M-G2K020H-S2
R88M-G3K020H-S2
R88M-G2K020H-B S2
R88M-G3K020H-B S2

ABS

R88M-G2K020T (-S2)
R88M-G3K020T (-S2)
R88M-G2K020T-B (S2)
R88M-G3K020T-B (S2)

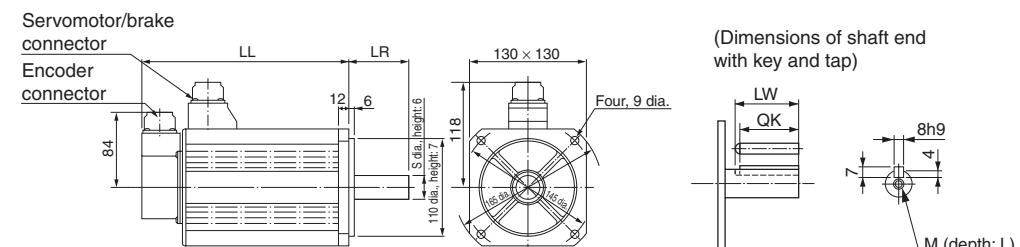

Model	LL	LR	S	LW	QK	M	L
R88M-G2K020□	200	55	22	45	41	M5	12
R88M-G3K020□	250	65	24	55	51	M8	20
R88M-G2K020□-B	225	55	22	45	41	M5	12
R88M-G3K020□-B	275	65	24	55	51	M8	20

Note: The standard models have a straight shaft.


- 200 VAC : 4 kW/5 kW

INC

R88M-G4K020H-S2
R88M-G5K020H-S2
R88M-G4K020H-B S2
R88M-G5K020H-B S2

ABS

R88M-G4K020T (-S2)
R88M-G5K020T (-S2)
R88M-G4K020T-B (S2)
R88M-G5K020T-B (S2)

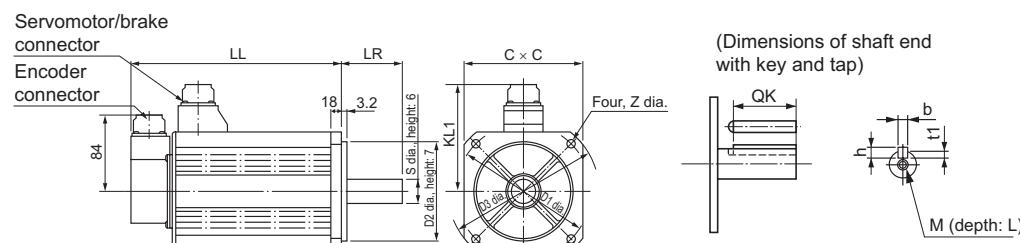

Model	LL	LR	S	D1	D2	C	D3	KL1	Z	QK	b	h	t1	M	L
R88M-G4K020□	242	65	28	165	130	150	190	128	11	51	8h9	7	4	M8	20
R88M-G5K020□	225	70	35	200	114.3	176	233	143	13.5	50	10h9	8	5	M12	25
R88M-G4K020□-B	267	65	28	165	130	150	190	128	11	51	8h9	7	4	M8	20
R88M-G5K020□-B	250	70	35	200	114.3	176	233	143	13.5	50	10h9	8	5	M12	25

Note: The standard models have a straight shaft. A model with a key and tap is indicated by adding "S2" to the end of the model number.

1,500-r/min Cylindrical Servomotors

- 7.5 kW

INC

R88M-G7K515H-S2


R88M-G7K515H-B S2

ABS

R88M-G7K515T (-S2)

R88M-G7K515T-B (S2)

Model	LL
R88M-G7K515□	340.5
R88M-G7K515□-B	380.5

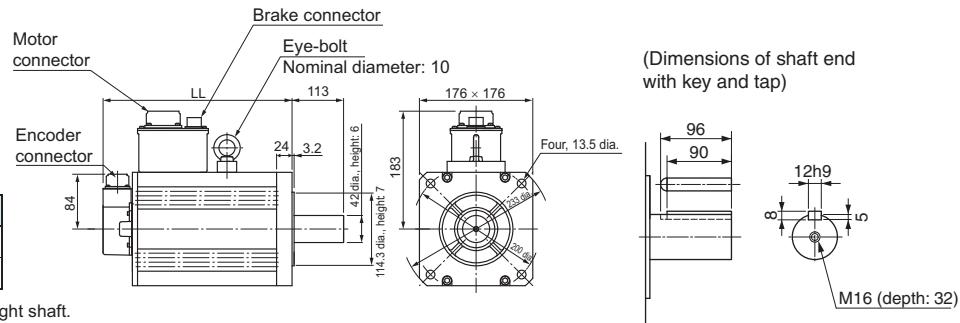

Note: The standard models have a straight shaft.

A model with a key and tap is indicated by adding "S2" to the end of the model number.

1,000-r/min Cylindrical Servomotors

- 900 W/2 kW

INC

R88M-G2K010H-S2


R88M-G2K010H-B S2

ABS

R88M-G2K010T (-S2)

R88M-G90010T-B (S2)

R88M-G2K010T-B (S2)

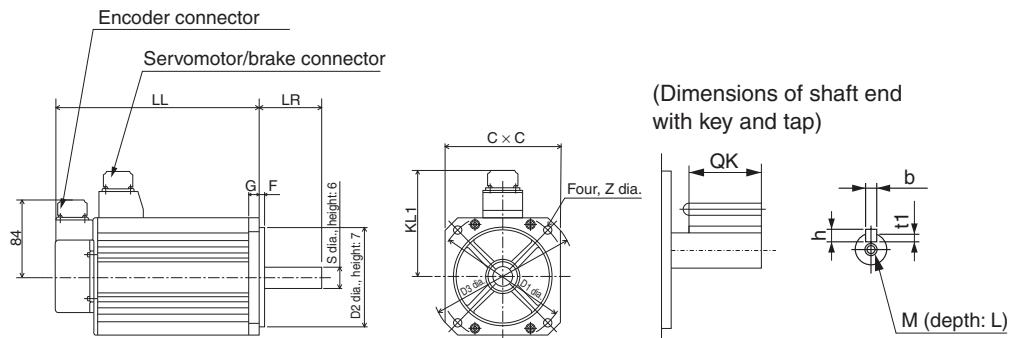

Model	LL	LR	S	D1	D2	C	D3	F	G	KL1	Z	QK	b	h	t1	M	L
R88M-G90010T	175	70	22	145	110	130	165	6	12	118	9	41	8h9	7	4	M5	12
R88M-G2K010□	182	80	35	200	114.3	176	233	3.2	18	143	13.5	50	10h9	8	5	M12	25
R88M-G90010T-B	200	70	22	145	110	130	165	6	12	118	9	41	8h9	7	4	M5	12
R88M-G2K010□-B	207	80	35	200	114.3	176	233	3.2	18	143	13.5	50	10h9	8	5	M12	25

Note: The standard models have a straight shaft. A model with a key and tap is indicated by adding "S2" to the end of the model number.

- 3 kW

INC

R88M-G3K010H-S2


R88M-G3K010H-B S2

ABS

R88M-G3K010T (-S2)

R88M-G3K010T-B (S2)

Model	LL
R88M-G3K010□	222
R88M-G3K010□-B	271

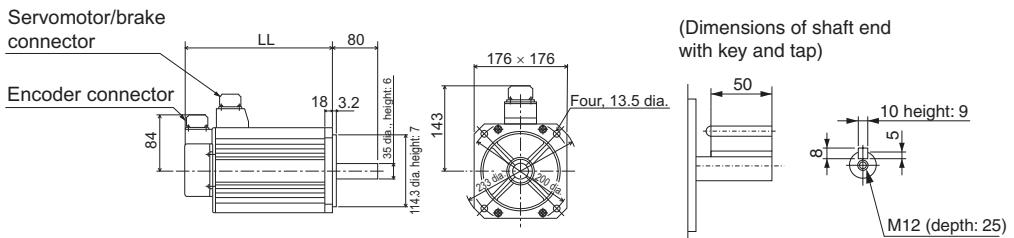

Note: The standard models have a straight shaft.

A model with a key and tap is indicated by adding "S2" to the end of the model number.

• 4.5 kW**INC**


R88M-G4K510H-S2

R88M-G4K510H-B S2

ABS

R88M-G4K510T (-S2)

R88M-G4K510T-B (S2)

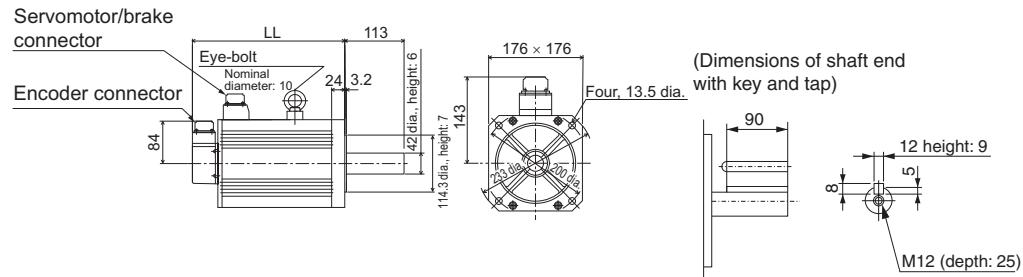

Model	LL
R88M-G4K510□	300.5
R88M-G4K510□-B	337.5

Note: The standard models have a straight shaft.

A model with a key and tap is indicated by adding "S2" to the end of the model number.

• 6 kW**INC**


R88M-G6K010H-S2

R88M-G6K010H-B S2

ABS

R88M-G6K010T (-S2)

R88M-G6K010T-B (S2)

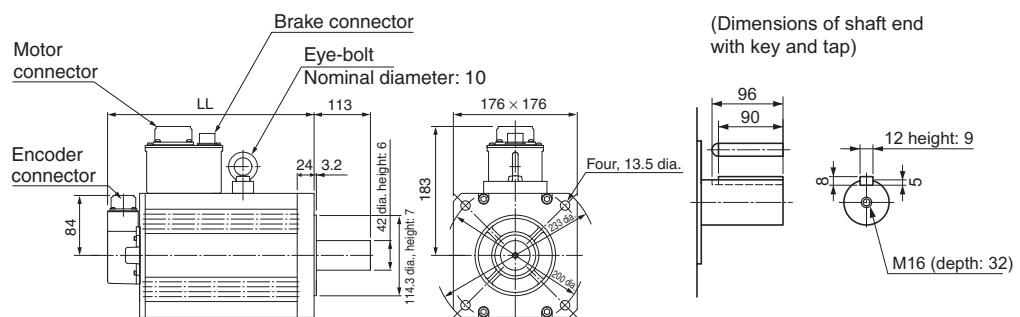

Model	LL
R88M-G6K010□	340.5
R88M-G6K010□-B	380.5

Note: The standard models have a straight shaft.

A model with a key and tap is indicated by adding "S2" to the end of the model number.

● Decelerators

3,000-r/min Cylindrical Servomotors


- Backlash: 3 Arcminutes Max.

Model			Dimensions (mm)												
			LM	LR	C1	C2	D1	D2	D3	D4	D5	E	F1	F2	
50 W	1/5	R88G-HPG11A05100B	39.5	42	40	40×40	46	46	40.0	39.5	29	27	2.2	15	
	1/9	R88G-HPG11A09050B	39.5	42	40	40×40	46	46	40.0	39.5	29	27	2.2	15	
	1/21	R88G-HPG14A21100B	64.0	58	60	60×60	70	46	56.0	55.5	40	37	2.5	21	
	1/33	R88G-HPG14A33050B	64.0	58	60	60×60	70	46	56.0	55.5	40	37	2.5	21	
	1/45	R88G-HPG14A45050B	64.0	58	60	60×60	70	46	56.0	55.5	40	37	2.5	21	
100 W	1/5	R88G-HPG11A05100B	39.5	42	40	40×40	46	46	40.0	39.5	29	27	2.2	15	
	1/11	R88G-HPG14A11100B	64.0	58	60	60×60	70	46	56.0	55.5	40	37	2.5	21	
	1/21	R88G-HPG14A21100B	64.0	58	60	60×60	70	46	56.0	55.5	40	37	2.5	21	
	1/33	R88G-HPG20A33100B	66.5	80	90	55 dia.	105	46	85.0	84.0	59	53	7.5	27	
	1/45	R88G-HPG20A45100B	66.5	80	90	55 dia.	105	46	85.0	84.0	59	53	7.5	27	
200 W	1/5	R88G-HPG14A05200B	64.0	58	60	60×60	70	46	56.0	55.5	40	37	2.5	21	
	1/11	R88G-HPG14A11200B	64.0	58	60	60×60	70	46	56.0	55.5	40	37	2.5	21	
	1/21	R88G-HPG20A21200B	71.0	80	90	89 dia.	105	70	85.0	84.0	59	53	7.5	27	
	1/33	R88G-HPG20A33200B	71.0	80	90	89 dia.	105	70	85.0	84.0	59	53	7.5	27	
	1/45	R88G-HPG20A45200B	71.0	80	90	89 dia.	105	70	85.0	84.0	59	53	7.5	27	
400 W	1/5	R88G-HPG14A05400B	64.0	58	60	60×60	70	70	56.0	55.5	40	37	2.5	21	
	1/11	R88G-HPG20A11400B	71.0	80	90	89 dia.	105	70	85.0	84.0	59	53	7.5	27	
	1/21	R88G-HPG20A21400B	71.0	80	90	89 dia.	105	70	85.0	84.0	59	53	7.5	27	
	1/33	R88G-HPG32A33400B	104.0	133	120	122 dia.	135	70	115.0	114.0	84	98	12.5	35	
	1/45	R88G-HPG32A45400B	104.0	133	120	122 dia.	135	70	115.0	114.0	84	98	12.5	35	
750 W	1/5	R88G-HPG20A05750B	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
	1/11	R88G-HPG20A11750B	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
	1/21	R88G-HPG32A21750B	104.0	133	120	122 dia.	135	90	115.0	114.0	84	98	12.5	35	
	1/33	R88G-HPG32A33750B	104.0	133	120	122 dia.	135	90	115.0	114.0	84	98	12.5	35	
	1/45	R88G-HPG32A45750B	104.0	133	120	122 dia.	135	90	115.0	114.0	84	98	12.5	35	
1 kW	1/5	R88G-HPG32A051K0B	104	133	120	122 dia.	135	100	115	114	84	98	12.5	35	
	1/11	R88G-HPG32A111K0B	104	133	120	122 dia.	135	100	115	114	84	98	12.5	35	
	1/21	R88G-HPG32A211K0B	104	133	120	122 dia.	135	100	115	114	84	98	12.5	35	
	1/33	R88G-HPG32A331K0B	104	133	120	122 dia.	135	100	115	114	84	98	12.5	35	
	1/45	R88G-HPG50A451K0B	123	156	170	170 dia.	190	100	165	163	122	103	12.0	53	
1.5 kW	1/5	R88G-HPG32A052K0B	110	133	120	135 dia.	135	115	115	114	84	98	12.5	35	
	1/11	R88G-HPG32A112K0B	110	133	120	135 dia.	135	115	115	114	84	98	12.5	35	
	1/21	R88G-HPG32A211K5B	110	133	120	135 dia.	135	115	115	114	84	98	12.5	35	
	1/33	R88G-HPG50A332K0B	123	156	170	170 dia.	190	115	165	163	122	103	12.0	53	
	1/45	R88G-HPG50A451K5B	123	156	170	170 dia.	190	115	165	163	122	103	12.0	53	
2 kW	1/5	R88G-HPG32A052K0B	110	133	120	135 dia.	135	115	115	114	84	98	12.5	35	
	1/11	R88G-HPG32A112K0B	110	133	120	135 dia.	135	115	115	114	84	98	12.5	35	
	1/21	R88G-HPG50A212K0B	123	156	170	170 dia.	190	115	165	163	122	103	12.0	53	
	1/33	R88G-HPG50A332K0B	123	156	170	170 dia.	190	115	165	163	122	103	12.0	53	
3 kW	1/5	R88G-HPG32A053K0B	107	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/11	R88G-HPG50A113K0B	123	156	170	170 dia.	190	145	165	163	122	103	12.0	53	
	1/21	R88G-HPG50A213K0B	123	156	170	170 dia.	190	145	165	163	122	103	12.0	53	
4 kW	1/5	R88G-HPG32A054K0B	129	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/11	R88G-HPG50A115K0B	149	156	170	130×130	190	145	165	163	122	103	12.0	53	
5 kW	1/5	R88G-HPG50A055K0B	149	156	170	130×130	190	145	165	163	122	103	12.0	53	
	1/11	R88G-HPG50A115K0B	149	156	170	130×130	190	145	165	163	122	103	12.0	53	

Note: 1. The standard models have a straight shaft.

A model with a key and tap is indicated by adding "J" to the end of the model number.


(50 to 750 W)

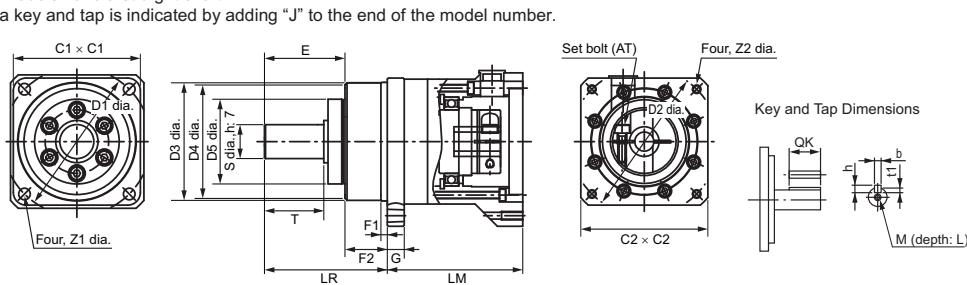

	Dimensions (mm)											Model		
	G	S	T	Z1	Z2	AT ^{*1}	Key dimensions			Tap dimensions				
							QK	b	h	t1	M	L		
5	8	20	3.4	M4×9	M3	15	3	3	1.8	M3	6	R88G-HPG11A05100B	1/5	50 W
5	8	20	3.4	M4×9	M3	15	3	3	1.8	M3	6	R88G-HPG11A09050B	1/9	
8	16	28	5.5	M4×10	M3	25	5	5	3	M4	8	R88G-HPG14A21100B	1/21	
8	16	28	5.5	M4×10	M3	25	5	5	3	M4	8	R88G-HPG14A33050B	1/33	
8	16	28	5.5	M4×10	M3	25	5	5	3	M4	8	R88G-HPG14A45050B	1/45	
5	8	20	3.4	M4×10	M3	15	3	3	1.8	M3	6	R88G-HPG11A05100B	1/5	100 W
8	16	28	5.5	M4×9	M3	25	5	5	3	M4	8	R88G-HPG14A11100B	1/11	
8	16	28	5.5	M4×10	M3	25	5	5	3	M4	8	R88G-HPG14A21100B	1/21	
10	25	42	9.0	M4×10	M4	36	8	7	4.0	M6	12	R88G-HPG20A33100B	1/33	
10	25	42	9.0	M4×10	M4	36	8	7	4.0	M6	12	R88G-HPG20A45100B	1/45	
8	16	28	5.5	M4×10	M4	25	5	5	3	M4	8	R88G-HPG14A05200B	1/5	200 W
8	16	28	5.5	M4×10	M4	25	5	5	3	M4	8	R88G-HPG14A11200B	1/11	
10	25	42	9.0	M4×10	M4	36	8	7	4.0	M6	12	R88G-HPG20A21200B	1/21	
10	25	42	9.0	M4×10	M4	36	8	7	4.0	M6	12	R88G-HPG20A33200B	1/33	
10	25	42	9.0	M4×10	M4	36	8	7	4.0	M6	12	R88G-HPG20A45200B	1/45	
8	16	28	5.5	M4×10	M4	25	5	5	3	M4	8	R88G-HPG14A05400B	1/5	400 W
10	25	42	9.0	M4×10	M4	36	8	7	4.0	M6	12	R88G-HPG20A11400B	1/11	
10	25	42	9.0	M4×10	M4	36	8	7	4.0	M6	12	R88G-HPG20A21400B	1/21	
13	40	82	11.0	M4×10	M4	70	12	8	5.0	M10	20	R88G-HPG32A33400B	1/33	
13	40	82	11.0	M4×10	M4	70	12	8	5.0	M10	20	R88G-HPG32A45400B	1/45	
10	25	42	9.0	M5×10	M4	36	8	7	4.0	M6	12	R88G-HPG20A05750B	1/5	750 W
10	25	42	9.0	M5×12	M4	36	8	7	4.0	M6	12	R88G-HPG20A11750B	1/11	
13	40	82	11.0	M5×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A21750B	1/21	
13	40	82	11.0	M5×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A33750B	1/33	
13	40	82	11.0	M5×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A45750B	1/45	
13	40	82	11	M6×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A051K0B	1/5	1 kW
13	40	82	11	M6×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A111K0B	1/11	
13	40	82	11	M6×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A211K0B	1/21	
13	40	82	11	M6×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A331K0B	1/33	
16	50	82	14	M6×10	M6	70	14	9	5.5	M10	20	R88G-HPG50A451K0B	1/45	
13	40	82	11	M8×10	M6	70	12	8	5.0	M10	20	R88G-HPG32A052K0B	1/5	1.5 kW
13	40	82	11	M8×10	M6	70	12	8	5.0	M10	20	R88G-HPG32A112K0B	1/11	
13	40	82	11	M8×10	M6	70	12	8	5.0	M10	20	R88G-HPG32A211K5B	1/21	
16	50	82	14	M8×10	M6	70	14	9	5.5	M10	20	R88G-HPG50A332K0B	1/33	
16	50	82	14	M8×10	M6	70	14	9	5.5	M10	20	R88G-HPG50A451K5B	1/45	
13	40	82	11	M8×10	M6	70	12	8	5.0	M10	20	R88G-HPG32A052K0B	1/5	2 kW
13	40	82	11	M8×10	M6	70	12	8	5.0	M10	20	R88G-HPG32A112K0B	1/11	
16	50	82	14	M8×10	M6	70	14	9	5.5	M10	20	R88G-HPG50A212K0B	1/21	
16	50	82	14	M8×10	M6	70	14	9	5.5	M10	20	R88G-HPG50A332K0B	1/33	
13	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A053K0B	1/5	3 kW
16	50	82	14	M8×16	M6	70	14	9	5.5	M10	20	R88G-HPG50A113K0B	1/11	
16	50	82	14	M8×16	M6	70	14	9	5.5	M10	20	R88G-HPG50A213K0B	1/21	
13	40	82	11	M8×25	M6	70	12	8	5.0	M10	20	R88G-HPG32A054K0B	1/5	4 kW
16	50	82	14	M8×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A115K0B	1/11	
16	50	82	14	M8×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A055K0B	1/5	5 kW
16	50	82	14	M8×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A115K0B	1/11	

*1. This is the set bolt.

(1 to 5 kW)

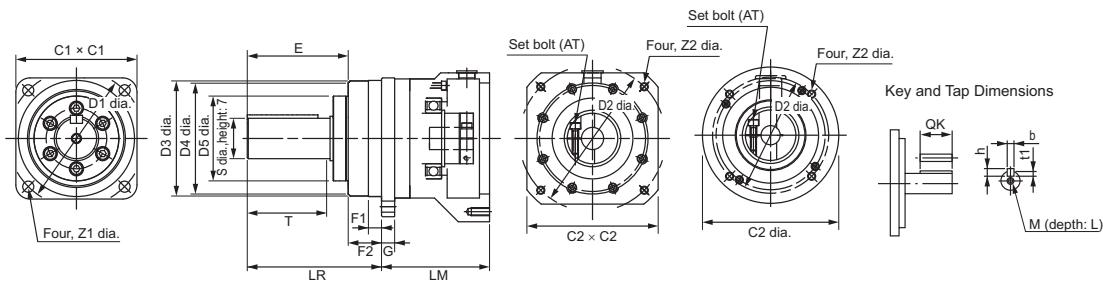


3,000-r/min Flat Servomotors

- Backlash: 3 Arcminutes Max.

Model			Dimensions (mm)												
			LM	LR	C1	C2	D1	D2	D3	D4	D5	E	F1	F2	
100 W	1/5	R88G-HPG11A05100PB	39.5	42	40	60×60	46	70	40.0	39.5	29	27	2.2	15	
	1/11	R88G-HPG14A11100PB	64.0	58	60	60×60	70	70	56.0	55.5	40	37	2.5	21	
	1/21	R88G-HPG14A21100PB	64.0	58	60	60×60	70	70	56.0	55.5	40	37	2.5	21	
	1/33	R88G-HPG20A33100PB	71.0	80	90	89 dia.	105	70	85.0	84.0	59	53	7.5	27	
	1/45	R88G-HPG20A45100PB	71.0	80	90	89 dia.	105	70	85.0	84.0	59	53	7.5	27	
200 W	1/5	R88G-HPG14A05200PB	65.0	58	60	80×80	70	90	56.0	55.5	40	37	2.5	21	
	1/11	R88G-HPG20A11200PB	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
	1/21	R88G-HPG20A21200PB	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
	1/33	R88G-HPG20A33200PB	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
	1/45	R88G-HPG20A45200PB	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
400 W	1/5	R88G-HPG20A05400PB	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
	1/11	R88G-HPG20A11400PB	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
	1/21	R88G-HPG20A21400PB	78.0	80	90	80×80	105	90	85.0	84.0	59	53	7.5	27	
	1/33	R88G-HPG32A33400PB	104.0	133	120	122 dia.	135	90	115.0	114.0	84	98	12.5	35	
	1/45	R88G-HPG32A45400PB	104.0	133	120	122 dia.	135	90	115.0	114.0	84	98	12.5	35	

Note: 1. The standard models have a straight shaft.


A model with a key and tap is indicated by adding "J" to the end of the model number.

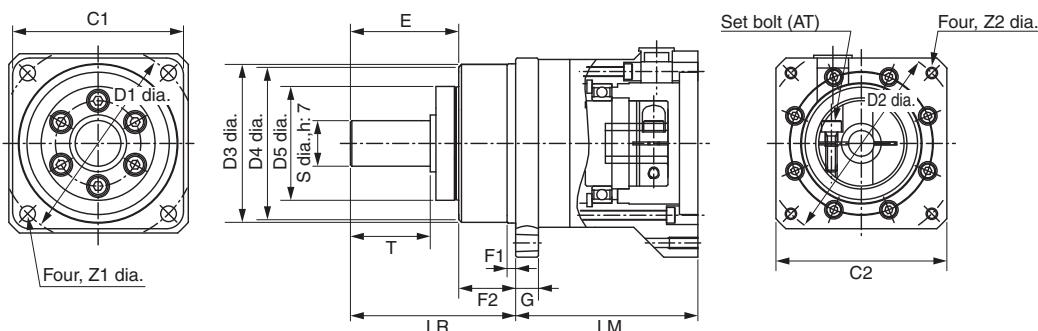

	Dimensions (mm)										Model		
	G	S	T	Z1	Z2	AT ^{*1}	Key dimensions						
							QK	b	h	t1	M	L	
5	8	20	3.4	M4×9	M3	15	3	3	1.8	M3	6	R88G-HPG11A05100PB	1/5
8	16	28	5.5	M4×10	M3	25	5	5	3.0	M4	8	R88G-HPG14A11100PB	1/11
8	16	28	5.5	M4×10	M3	25	5	5	3.0	M4	8	R88G-HPG14A21100PB	1/21
10	25	42	9.0	M4×10	M3	36	8	7	4.0	M6	12	R88G-HPG20A33100PB	1/33
10	25	42	9.0	M4×10	M3	36	8	7	4.0	M6	12	R88G-HPG20A45100PB	1/45
8	16	28	5.5	M5×12	M4	25	5	5	3.0	M4	8	R88G-HPG14A05200PB	1/5
10	25	42	9.0	M5×12	M4	36	8	7	4.0	M6	12	R88G-HPG20A11200PB	1/11
10	25	42	9.0	M5×12	M4	36	8	7	4.0	M6	12	R88G-HPG20A21200PB	1/21
10	25	42	9.0	M5×12	M4	36	8	7	4.0	M6	12	R88G-HPG20A33200PB	1/33
10	25	42	9.0	M5×12	M4	36	8	7	4.0	M6	12	R88G-HPG20A45200PB	1/45
10	25	42	9.0	M5×12	M4	36	8	7	4.0	M6	12	R88G-HPG20A05400PB	1/5
10	25	42	9.0	M5×12	M4	36	8	7	4.0	M6	12	R88G-HPG20A11400PB	1/11
10	25	42	9.0	M5×12	M4	36	8	7	4.0	M6	12	R88G-HPG20A21400PB	1/21
13	40	82	11.0	M5×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A33400PB	1/33
13	40	82	11.0	M5×12	M6	70	12	8	5.0	M10	20	R88G-HPG32A45400PB	1/45

*1. This is the set bolt.

Key and Tap Dimensions

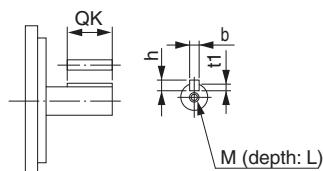


2,000-r/min Cylindrical Servomotors

- Backlash: 3 Arcminutes Max.

Model			Dimensions (mm)												
			LM	LR	C1	C2	D1	D2	D3	D4	D5	E	F1	F2	
1 kW	1/5	R88G-HPG32A053K0B	107	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/11	R88G-HPG32A112K0SB	107	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/21	R88G-HPG32A211K0SB	107	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/33	R88G-HPG50A332K0SB	123	156	170	170 dia.	190	145	165	163	122	103	12.0	53	
	1/45	R88G-HPG50A451K0SB	123	156	170	170 dia.	190	145	165	163	122	103	12.0	53	
1.5 kW	1/5	R88G-HPG32A053K0B	107	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/11	R88G-HPG32A112K0SB	107	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/21	R88G-HPG50A213K0B	123	156	170	170 dia.	190	145	165	163	122	103	12.0	53	
	1/33	R88G-HPG50A332K0SB	123	156	170	170 dia.	190	145	165	163	122	103	12.0	53	
2 kW	1/5	R88G-HPG32A053K0B	107	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/11	R88G-HPG32A112K0SB	107	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/21	R88G-HPG50A213K0B	123	156	170	170 dia.	190	145	165	163	122	103	12.0	53	
	1/33	R88G-HPG50A332K0SB	123	156	170	170 dia.	190	145	165	163	122	103	12.0	53	
3 kW	1/5	R88G-HPG32A054K0B	129	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/11	R88G-HPG50A115K0B	149	156	170	130×130	190	145	165	163	122	103	12.0	53	
	1/21	R88G-HPG50A213K0B	149	156	170	130×130	190	145	165	163	122	103	12.0	53	
	1/25	R88G-HPG65A253K0SB	231	222	230	130×130	260	145	220	214	168	165	12.0	57	
4 kW	1/5	R88G-HPG50A054K0SB	149	156	170	180×180	190	165	165	163	122	103	12.0	53	
	1/11	R88G-HPG50A114K0SB	149	156	170	180×180	190	165	165	163	122	103	12.0	53	
	1/20	R88G-HPG65A204K0SB	231	222	230	180×180	260	165	220	214	168	165	12.0	57	
	1/25	R88G-HPG65A254K0SB	231	222	230	180×180	260	165	220	214	168	165	12.0	57	
5 kW	1/5	R88G-HPG50A055K0SB	149	156	170	180×180	190	200	165	163	122	103	12.0	53	
	1/11	R88G-HPG50A115K0SB	149	156	170	180×180	190	200	165	163	122	103	12.0	53	
	1/20	R88G-HPG65A205K0SB	231	222	230	180×180	260	200	220	214	168	165	12.0	57	
	1/25	R88G-HPG65A255K0SB	231	222	230	180×180	260	200	220	214	168	165	12.0	57	
7.5 kW	1/5	R88G-HPG65A057K5SB	184.5	222	230	180×180	260	200	220	214	168	165	12.0	57	
	1/12	R88G-HPG65A127K5SB	254.5	222	230	180×180	260	200	220	214	168	165	12.0	57	

Note: The standard models have a straight shaft with a key.


A model with a key and tap is indicated by adding "J" to the end of the model number.

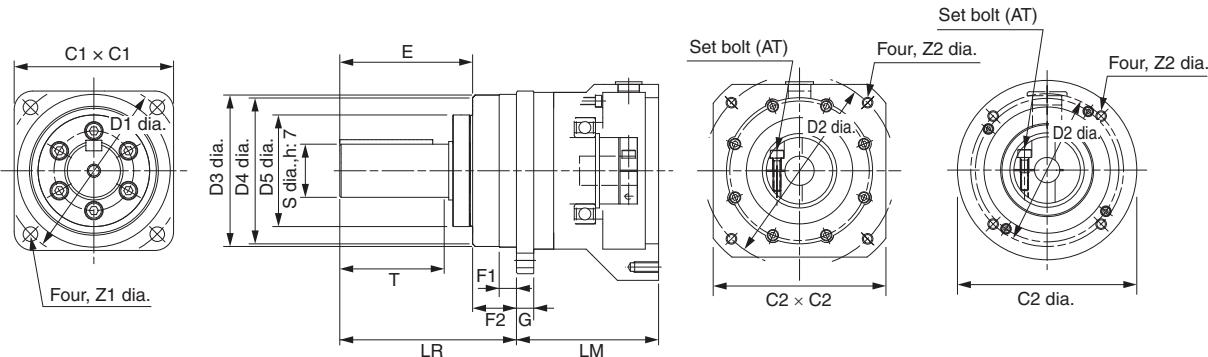

	Dimensions (mm)											Model		
	G	S	T	Z1	Z2	AT *1	Key dimensions			Tap dimensions				
							QK	b	h	t1	M	L		
13	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A053K0B	1/5	1 kW
	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A112K0SB	1/11	
	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A211K0SB	1/21	
	50	82	14	M8×16	M6	70	14	9	5.5	M10	20	R88G-HPG50A332K0SB	1/33	
	50	82	14	M8×16	M6	70	14	9	5.5	M10	20	R88G-HPG50A451K0SB	1/45	
13	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A053K0B	1/5	1.5 kW
	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A112K0SB	1/11	
	50	82	14	M8×16	M6	70	14	9	5.5	M10	20	R88G-HPG50A213K0B	1/21	
	50	82	14	M8×16	M6	70	14	9	5.5	M10	20	R88G-HPG50A332K0SB	1/33	
	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A053K0B	1/5	
13	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A112K0SB	1/11	2 kW
	50	82	14	M8×16	M6	70	14	9	5.5	M10	20	R88G-HPG50A213K0B	1/21	
	50	82	14	M8×16	M6	70	14	9	5.5	M10	20	R88G-HPG50A332K0SB	1/33	
	40	82	11	M8×18	M6	70	12	8	5.0	M10	20	R88G-HPG32A054K0B	1/5	
	50	82	14	M8×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A115K0B	1/11	
16	50	82	14	M8×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A213K0SB	1/21	3 kW
	50	82	14	M8×25	M6	70	14	9	5.5	M10	20	R88G-HPG65A253K0SB	1/25	
	80	130	18	M8×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A254K0SB	1/25	
	50	82	14	M10×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A054K0SB	1/5	
	50	82	14	M10×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A114K0SB	1/11	
25	80	130	18	M10×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A204K0SB	1/20	4 kW
	80	130	18	M10×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A254K0SB	1/25	
	50	82	14	M12×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A055K0SB	1/5	
	50	82	14	M12×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A115K0SB	1/11	
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A205K0SB	1/20	
25	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A255K0SB	1/25	5 kW
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A057K5SB	1/5	
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A127K5SB	1/12	
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A127K5SB	1/12	

*1. This is the set bolt.

Key and Tap Dimensions

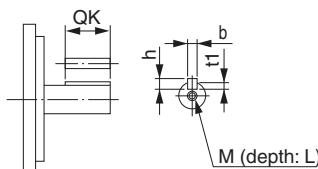


1,000-r/min Cylindrical Servomotors

- Backlash: 3 Arcminutes Max.

Model			Dimensions (mm)												
			LM	LR	C1	C2	D1	D2	D3	D4	D5	E	F1	F2	
900 W	1/5	R88G-HPG32A05900TB	129	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/11	R88G-HPG32A11900TB	129	133	120	130×130	135	145	115	114	84	98	12.5	35	
	1/21	R88G-HPG50A21900TB	149	156	170	130×130	190	145	165	163	122	103	12.0	53	
	1/33	R88G-HPG50A33900TB	149	156	170	130×130	190	145	165	163	122	103	12.0	53	
2 kW	1/5	R88G-HPG32A052K0TB	129	133	120	180×180	135	200	115	114	84	98	12.5	35	
	1/11	R88G-HPG50A112K0TB	149	156	170	180×180	190	200	165	163	122	103	12.0	53	
	1/21	R88G-HPG50A212K0TB	149	156	170	180×180	190	200	165	163	122	103	12.0	53	
	1/25	R88G-HPG65A255K0SB	231	222	230	180×180	260	200	220	214	168	165	12.0	57	
3 kW	1/5	R88G-HPG50A055K0SB	149	156	170	180×180	190	200	165	163	122	103	12.0	53	
	1/11	R88G-HPG50A115K0SB	149	156	170	180×180	190	200	165	163	122	103	12.0	53	
	1/20	R88G-HPG65A205K0SB	231	222	230	180×180	260	200	220	214	168	165	12.0	57	
	1/25	R88G-HPG65A255K0SB	231	222	230	180×180	260	200	220	214	168	165	12.0	57	
4.5 kW	1/5	R88G-HPG50A054K5TB	149	156	170	180×180	190	200	165	163	122	103	12.0	53	
	1/12	R88G-HPG65A127K5SB	254.5	222	230	180×180	260	200	220	214	168	165	12.0	57	
	1/20	R88G-HPG65A204K5TB	254.5	222	230	180×180	260	200	220	214	168	165	12.0	57	
6 kW	1/5	R88G-HPG65A057K5SB	184.5	222	230	180×180	260	200	220	214	168	165	12.0	57	
	1/12	R88G-HPG65A127K5SB	254.5	222	230	180×180	260	200	220	214	168	165	12.0	57	

Note: The standard models have a straight shaft with a key.


A model with a key and tap is indicated by adding "J" to the end of the model number.

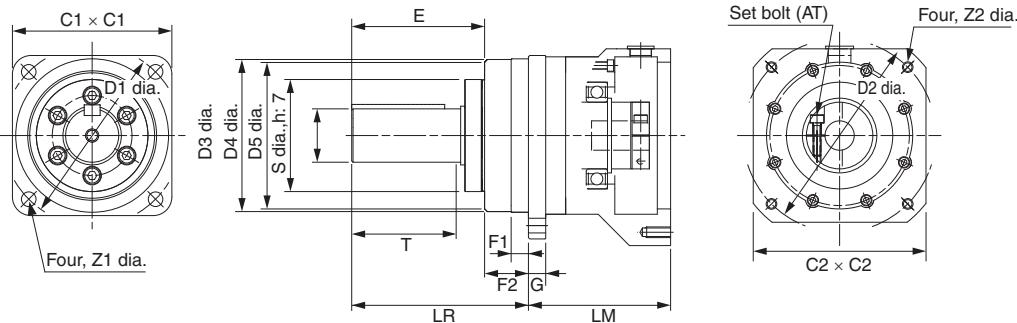

	Dimensions (mm)											Model		
	G	S	T	Z1	Z2	AT *1	Key dimensions			Tap dimensions				
							QK	b	h	t1	M	L		
13	40	82	11	M8×25	M6	70	12	8	5.0	M10	20	R88G-HPG32A05900TB	1/5	900 W
	40	82	11	M8×25	M6	70	12	8	5.0	M10	20	R88G-HPG32A11900TB	1/11	
	50	82	14	M8×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A21900TB	1/21	
	50	82	14	M8×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A33900TB	1/33	
13	40	82	11	M12×25	M6	70	12	8	5.0	M10	20	R88G-HPG32A052K0TB	1/5	2 kW
	50	82	14	M12×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A112K0TB	1/11	
	50	82	14	M12×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A212K0TB	1/21	
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A255K0SB	1/25	
16	50	82	14	M12×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A055K0SB	1/5	3 kW
	50	82	14	M12×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A115K0SB	1/11	
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A205K0SB	1/20	
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A255K0SB	1/25	
16	50	82	14	M12×25	M6	70	14	9	5.5	M10	20	R88G-HPG50A054K5TB	1/5	4.5 kW
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A127K5SB	1/12	
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A204K5TB	1/20	
	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A057K5SB	1/5	
25	80	130	18	M12×25	M8	110	22	14	9.0	M16	35	R88G-HPG65A127K5SB	1/12	6 kW

*1. This is the set bolt.

Key and Tap Dimensions

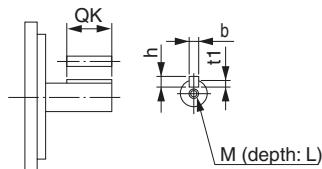


3,000-r/min Cylindrical Servomotors


- Backlash: 15 Arcminutes Max.

Model			Dimensions (mm)										
			LM	LR	C1	C2	D1	D2	D3	D4	E3	F	
50 W	1/5	R88G-VRSF05B100CJ	67.5	32	52	40	46	60	50	45	10	3	6
	1/9	R88G-VRSF09B100CJ	67.5	32	52	40	46	60	50	45	10	3	6
	1/15	R88G-VRSF15B100CJ	78.0	32	52	40	46	60	50	45	10	3	6
	1/25	R88G-VRSF25B050CJ	78.0	32	52	40	46	60	50	45	10	3	6
100 W	1/5	R88G-VRSF05B100CJ	67.5	32	52	40	46	60	50	45	10	3	6
	1/9	R88G-VRSF09B100CJ	67.5	32	52	40	46	60	50	45	10	3	6
	1/15	R88G-VRSF15B100CJ	78.0	32	52	40	46	60	50	45	10	3	6
	1/25	R88G-VRSF25B100CJ	78.0	32	52	40	46	60	50	45	10	3	6
200 W	1/5	R88G-VRSF05B200CJ	72.5	32	52	60	70	60	50	45	10	3	10
	1/9	R88G-VRSF09C200CJ	89.5	50	78	60	70	90	70	62	17	3	8
	1/15	R88G-VRSF15C200CJ	100.0	50	78	60	70	90	70	62	17	3	8
	1/25	R88G-VRSF25C200CJ	100.0	50	78	60	70	90	70	62	17	3	8
400 W	1/5	R88G-VRSF05C400CJ	89.5	50	78	60	70	90	70	62	17	3	8
	1/9	R88G-VRSF09C400CJ	89.5	50	78	60	70	90	70	62	17	3	8
	1/15	R88G-VRSF15C400CJ	100.0	50	78	60	70	90	70	62	17	3	8
	1/25	R88G-VRSF25C400CJ	100.0	50	78	60	70	90	70	62	17	3	8
750 W	1/5	R88G-VRSF05C750CJ	93.5	50	78	80	90	90	70	62	17	3	10
	1/9	R88G-VRSF09D750CJ	97.5	61	98	80	90	115	90	75	18	5	10
	1/15	R88G-VRSF15D750CJ	110.0	61	98	80	90	115	90	75	18	5	10
	1/25	R88G-VRSF25D750CJ	110.0	61	98	80	90	115	90	75	18	5	10

Note: The standard models have a straight shaft with a key.

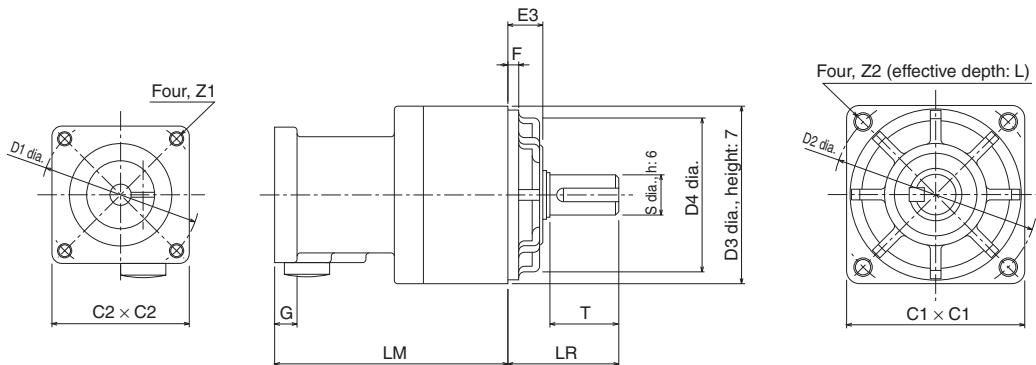

	Dimensions (mm)									Model		
	S	T	Z1	Z2	AT	L	Key dimensions					
							QK	b	h	t1		
12	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF05B100CJ	1/5	50 W
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF09B100CJ	1/9	
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF15B100CJ	1/15	
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF25B050CJ	1/25	
12	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF05B100CJ	1/5	100 W
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF09B100CJ	1/9	
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF15B100CJ	1/15	
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF25B100CJ	1/25	
12	20	M5	M5	M4	12	16	4	4	2.5	R88G-VRSF05B200CJ	1/5	200 W
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF09C200CJ	1/9	
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF15C200CJ	1/15	
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF25C200CJ	1/25	
19	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF05C400CJ	1/5	400 W
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF09C400CJ	1/9	
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF15C400CJ	1/15	
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF25C400CJ	1/25	
19	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF05C750CJ	1/5	750 W
	40	M5	M8	M4	20	30	8	7	4	R88G-VRSF09D750CJ	1/9	
	40	M5	M8	M4	20	30	8	7	4	R88G-VRSF15D750CJ	1/15	
	40	M5	M8	M4	20	30	8	7	4	R88G-VRSF25D750CJ	1/25	

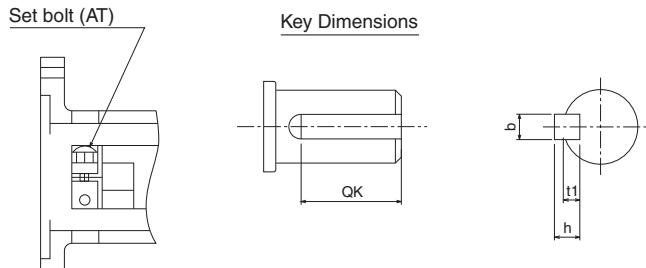


3,000-r/min Flat Servomotors


- Backlash: 15 Arcminutes Max.

Model			Dimensions (mm)										
			LM	LR	C1	C2	D1	D2	D3	D4	E3	F	
100 W	1/5	R88G-VRSF05B100PCJ	67.5	32	52	60	70	60	50	45	10	3	8
	1/9	R88G-VRSF09B100PCJ	67.5	32	52	60	70	60	50	45	10	3	8
	1/15	R88G-VRSF15B100PCJ	78.0	32	52	60	70	60	50	45	10	3	8
	1/25	R88G-VRSF25B100PCJ	78.0	32	52	60	70	60	50	45	10	3	8
200 W	1/5	R88G-VRSF05B200PCJ	72.5	32	52	80	90	60	50	45	10	3	12
	1/9	R88G-VRSF09C200PCJ	89.5	50	78	80	90	90	70	62	17	3	12
	1/15	R88G-VRSF15C200PCJ	100.0	50	78	80	90	90	70	62	17	3	12
	1/25	R88G-VRSF25C200PCJ	100.0	50	78	80	90	90	70	62	17	3	12
400 W	1/5	R88G-VRSF05C400PCJ	89.5	50	78	80	90	90	70	62	17	3	12
	1/9	R88G-VRSF09C400PCJ	89.5	50	78	80	90	90	70	62	17	3	12
	1/15	R88G-VRSF15C400PCJ	100.0	50	78	80	90	90	70	62	17	3	12
	1/25	R88G-VRSF25C400PCJ	100.0	50	78	80	90	90	70	62	17	3	12

Note: The standard models have a straight shaft with a key.

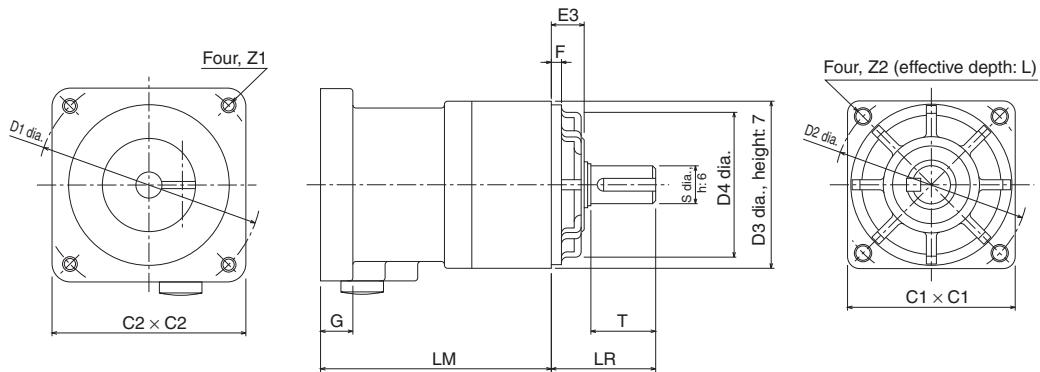


	Dimensions (mm)								Model		
	S	T	Z1	Z2	AT	L	Key dimensions				
							QK	b	h	t1	
12	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF05B100PCJ	1/5
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF09B100PCJ	1/9
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF15B100PCJ	1/15
	20	M4	M5	M3	12	16	4	4	2.5	R88G-VRSF25B100PCJ	1/25
12	20	M5	M5	M4	12	16	4	4	2.5	R88G-VRSF05B200PCJ	1/5
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF09C200PCJ	1/9
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF15C200PCJ	1/15
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF25C200PCJ	1/25
19	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF05C400PCJ	1/5
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF09C400PCJ	1/9
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF15C400PCJ	1/15
	30	M5	M6	M4	20	22	6	6	3.5	R88G-VRSF25C400PCJ	1/25

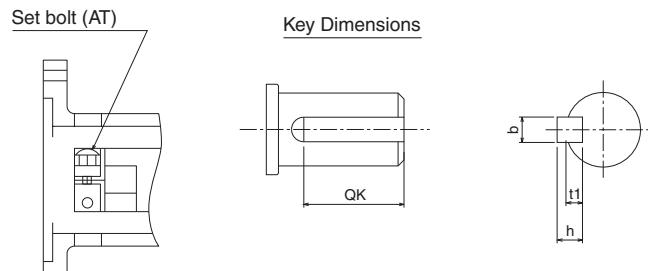


● Parameter Unit

R88A-PR02G

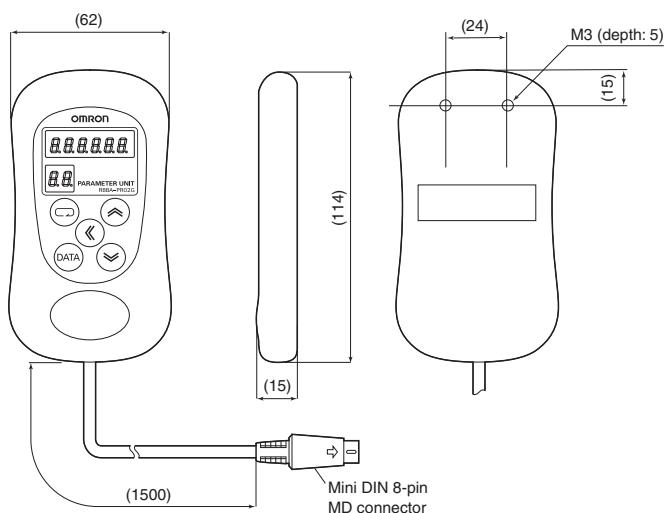


● External Regeneration Resistor


R88A-RR22047S

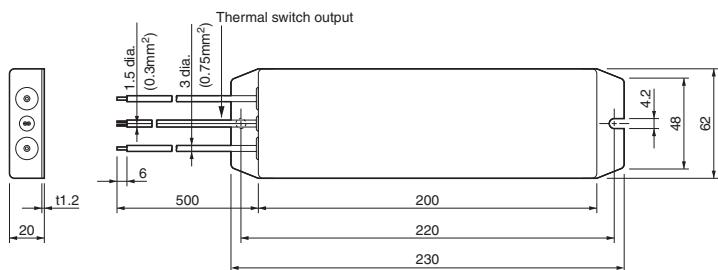

R88A-RR08050S/-RR080100S

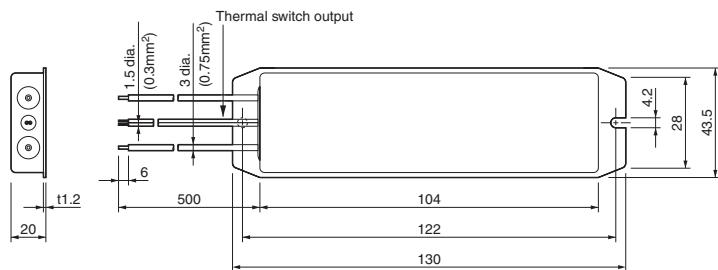


R88A-RR50020S

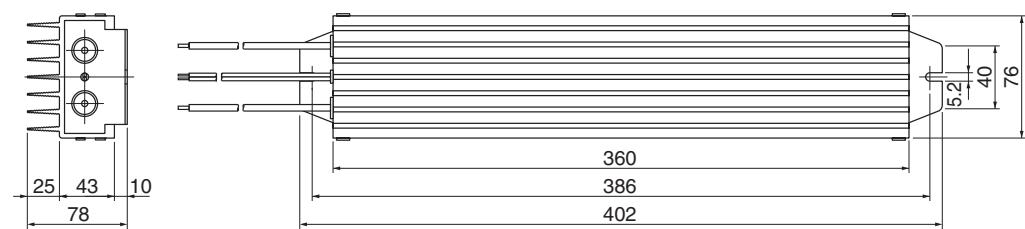


● Reactor


3G3AX-DL2002
3G3AX-DL2004

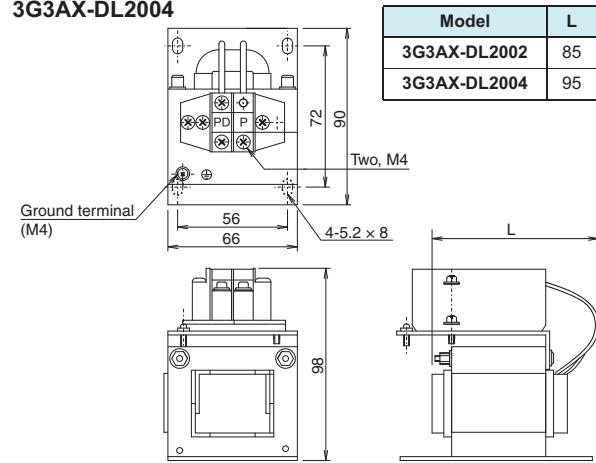


3G3AX-DL2007
3G3AX-DL2015

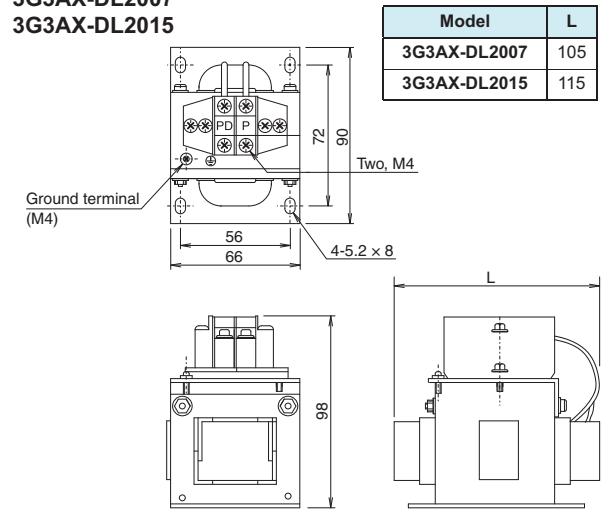


3G3AX-DL2022

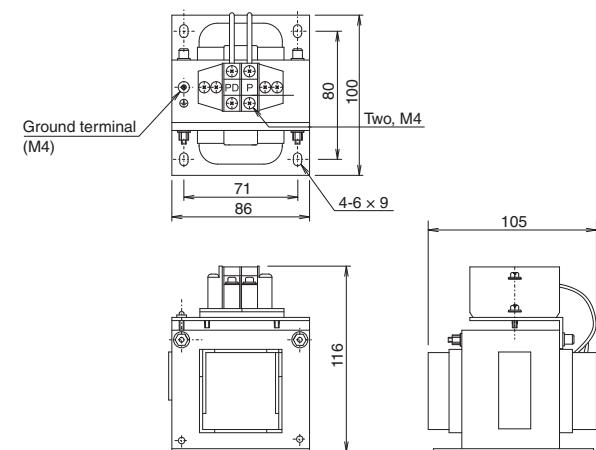

3G3AX-AL2025
3G3AX-AL2055

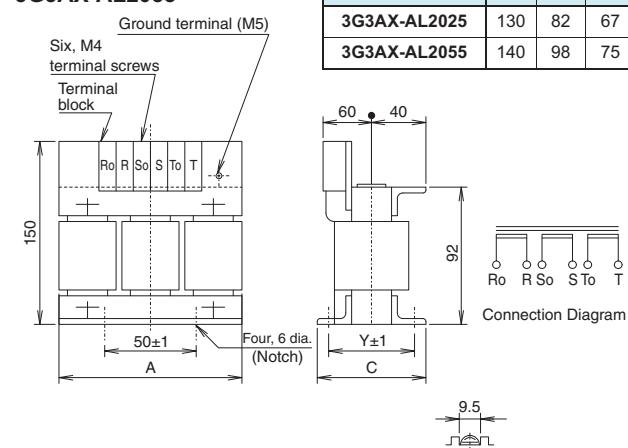

3G3AX-AL2110
3G3AX-AL2220

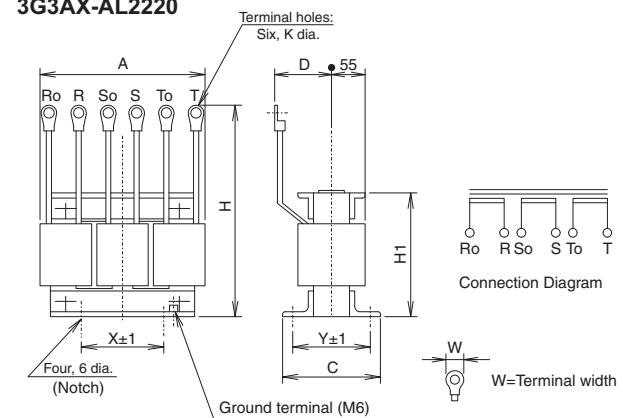

About Manuals

English Cat. No.	Japanese Cat. No.	Type	Name
I562	SBCE-349	R88M-G/R88D-GT	OMNUC G-series AC Servomotors/Servo Drives with General-purpose Pulse-string or Analog Inputs User's Manual
I566	SBCE-353	R88M-G/R88D-GN□-ML2	OMNUC G-series AC Servomotors/Servo Drives with Built-in MECHATROLINK-II Communications User's Manual

MEMO

Read and Understand this Catalog

Please read and understand this catalog before purchasing the product. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of the product in the customer's application or use of the product.

Take all necessary steps to determine the suitability of the product for the systems, machines, and equipment with which it will be used.

Know and observe all prohibitions of use applicable to this product.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons. Consult with your OMRON representative at any time to confirm actual specifications of purchased product.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.